



Einhell. QualityOffensive. Brand-Name Quality for the Best Price.

Quality. State of the art!



Our multi-level quality assurance system has absolutely no gaps. The coverage includes our innovative, in-house development activities, quality assurance under German supervision directly at the production sites and close collab-

oration with highly capable external partners such as TÜV. Labels such as TÜV/GS "Fit for use good" and exceptional warranty coverage, e.g. 10 years on various mower decks tell you all you need to know about conformance to stringent Einhell quality standards.



Top Service.*

Quality and service as a matter of principle.

Quality and service go hand in hand at Einhell, leavening nothing to be desired:

- Briggs & Stratton on-site service
- 20 years of Einhell service experience
- Personal contact with the experts on all service
- Up to 10 years spare parts availability and 24-hour shipping service
- Full-coverage network of service partners in Germany and Austria
- Online service portal with spare parts shop
- 24 hr. returns acceptance and processing
- Customer satisfaction assessments on a regular

Distinctions.

Independent quality verification.



Again and again, results published by independent institutes and the media confirm the excellent quality of Einhell products. Being named the winner in product tests, earning top ratings and re-

ceiving awards for entire product groups or the whole corporation prove beyond doubt that Einhell customers get genuine quality.



Extended warranty.*

24 months extended to 36 months free of charge.

You get even more value. The warranty can be extended for every new Einhell RED product. Extension is free of charge, fast and uncomplicated. Within 16 weeks follow-



ing product purchase, simply register on the Einhell homepage and enjoy the benefits of extended warranty protection – 3 years instead of 2. (Only valid in Germany and Austria)

Price/Performance.

Brand-name quality for the best price.



Einhell products deliver the same level of quality top well-known brands but cost around 25% - 35% less. On nu-

merous occasions, Einhell has received top ratings for price/performance in comparison tests performed by independent bodies and consumer report magazines, providing hard evidence of the exceptional cost-benefit ratio.



Sustainability.

Resource conservation for tomorrow's

Much of our garden equipment features Einhell ECO Power technology which reduces product energy consumption and emissions by up to 25%. Engineering expertise and a



pro-active commitment to environmental protection are the essence of ecological, sustainable products.

Design.

Compellingly attractive, right up there with the best!



The Made in Germany design idiom makes our products spontaneously desirable. That along with clever details puts them right up there with the top brands in the garden and tool segment.





Driving demand.

Full power in all channels.

Einhell's presence in major media is driving huge emand. Top media spending and sales-optimized POS give Einhell dealers the support they need. We have pulled out all the stops with full-page ads in target group publications, a concerted online presence and of course a highly effective PR campaign.

Einhell. WELL DONE.



Finhell 2016

Now more awesome than ever.

We supply quality at the best price plus service and design. Our brand is authentic, credible, suitable for the mass market and the traditional market and comes with a good ROI. And our brand claim communicates the very essence of our independent positioning with a strong promise. **EINHELL. WELL DONE.**

- New product categorization system: Classic · Expert · Expert Plus
- Strong marketing campaigns
- Innovative new products in high-growth market segments

Einhell. WELL DONE.

Well-made products, well-executed projects, customers with well-tended gardens and trading partners who feel that Einhell is doing a really good job: our benefits promise impacts in all directions and gives an equally strong message inwardly and outwardly.

Profit from the concentrated power that stops at nothing. From design, sustainability, quality and products through to service and driving demand: deploy the Einhell strategy of attack in all the important garden power tool segments in your business.

Einhell - Germany's dynamic brand for gardening and DIY.

- **■** Worldwide distribution
- German quality and service
- Persuasive product breadth

The innovative brand that is rapidly gaining traction


Ultra-profitable value for money products

CLASSIC

EXPERT

EXPERT Plus

Einhell's new product categorization system is targeted straight at the fast-growing and highly promising mid-price segment.

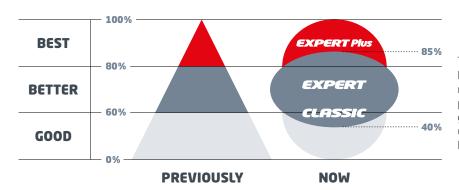

The new product categorization system from Einhell makes it easy for you and your customers to find their way round quickly. All new packaging features appealing product and usage pictures, multilingual explanations and a uniform Einhell brand facing in the high-grade Einhell brand design.

Einhell. The brand that is rapidly gaining traction. As seen online and in print!

Einhell would like to say thanks to its customers and trading partners. Einhell uses a professional media mix, including traditional print advertising, a search engine optimized online presence, Facebook etc.,... to strengthen the brand and drive demand. Einhell is a highly professional commercial partner.

- Strong products
- Strong promotions
- Strong price-performance ratio
- Strong sales support

Einhell. Online.

www.einhell.de

Facebook

Youtube

Instagram

Google+











Einhell. Print.

All major DIY magazines Daily newspapers





Power X-Change	POWER CHANGE	6
The Master battery system		6
Cordless lawn mowers		10
Cordless scarifier		11
Cordless hedge trimmers		13
Cordless lawn trimmers		13
Cordless multifunction tool		14
Cordless pole-mounted pruner		15
Cordless pole hedge trimmer		15
Cordless chainsaw		16
Saw chain sharpener		16
Cordless leaf blower		17
Cordless leaf vacuum		17
Cordless grass and shrub shear		17
Highlights / New products 2	2016 / 2017	18
	2010 / 2017	
Petrol lawn mowers		18 20
2in1 multi-purpose pumps		20
l awn care		22
Lawn care		
Manual lawn mowers		23
Cordless lawn mowers		24
Electric lawn mowers Petrol lawn mowers		25
Cordless scarifier		29 38
Electric scarifiers/aerators		39
Petrol scarifiers/aerators		41
Cordless lawn trimmers		42
Electric lawn trimmers		43
Petrol scythes		45
Petrol lawn trimmer		46
Petrol scythes		47
Electric/Petrol tillers		48
Tree and shrub care		50
Cordless hedge trimmers		51
Electric hedge trimmers	<i>M</i> 2 _	52
Petrol hedge trimmers		55
Cordless multifunction tool		56
Cordless pole-mounted pruner		57
Cordless pole hedge trimmer		57
Electric pole hedge trimmer		58
Cordless/ electric pole-mounted pruner		59
Cordless chainsaws		61
Electric chainsaws		63
Petrol chainsaws		65
Saw chain sharpener Cordless leaf blower		66 68
Cordless leaf vacuum		68
Electric leaf vacuums		69
Garden shredders		71
Cordless grass and shrub shears		73
Watering and drainage		74
2-in-1 multi-purpose pumps		75
2-III-1 muiti-purpose pumps Dirty water pumps		77
Submersible pumps		85
Rain barrel pump		85
Submersible pressure pump	W I PO A A	87
Deep well pump		87
Garden pumps		89
Automatic waterworks		90
Waterworks		93
Petrol water pump		95
Accessories		96
Colling support		107
Selling support		L02
Corvico		104





NOW THERE'S EVEN MORE.

MORE APPLICATIONS.

The Power X-Change system includes batteries with a nominal charge of 1.5 Ah to 5.2 Ah - so there's always a battery for every application!

SHORT CHARGING TIME.

Innovative battery technology – optimized charging – much shorter charging times. The 1.5 Ah battery, for example, is ready for use again after charging for just 30 minutes.

MORE POWER.

Twin-Pack technology for maximum power: For extremely energy-intensive applications 2 rechargeable batteries are simply used in one machine — e.g. in the lawn mower.

So the power comes from $2 \times 18 \text{ V} = 36 \text{ V}$


MORE SAFETY.

The Einhell ABS – Active Battery Management System – is setting the standard in terms of safety.

The temperature, current and voltage are constantly monitored, not only of the battery as a whole but also of each individual battery cell.

This is the maximum possible safety.


The optimized charging process goes easy on the Power X-Change batteries and therefore helps them to last longer.













POWER X-CHANGE.

PUTTING THE SYSTEM INTO BATTERY POWER.



BUY 1 SET.

Start your Power X-Change family! Buy one set consisting of

Power tool

- + Battery
- + Charger



START SAVING RIGHT AWAY.

Buy your next power and garden tools
WITHOUT the battery and
WITHOUT the charger.

So you'll save with every new tool purchase.



OR INDIVIDUALLY.

The choice is yours: you can also buy each tool and each battery + charger individually.






POWERBOOST

ALWAYS THE POWER YOU NEED



THE **SSP CHIP** ANALYZES AND DETECTS WHEN MORE POWER IS NEEDED IN ORDER TO OVERCOME AN OBSTACLE. WHEREAS CONVENTIONAL CORDLESS ELECTRICAL **DEVICES SWITCH OFF AS SOON AS THEY ENCOUNTER RESISTANCE PXC BATTERIES** INDUCE APPROPRIATE PEAK CURRENT TO **ENABLE WORK TO CONTINUE UN**

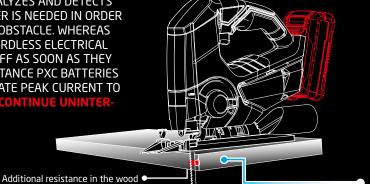




POWER BOOST

PEAK CURRENT PROFILE

IF THE DEVICE ENCOUNTERS **RESISTANCE,** PEAK CURRENT IS INDUCED:

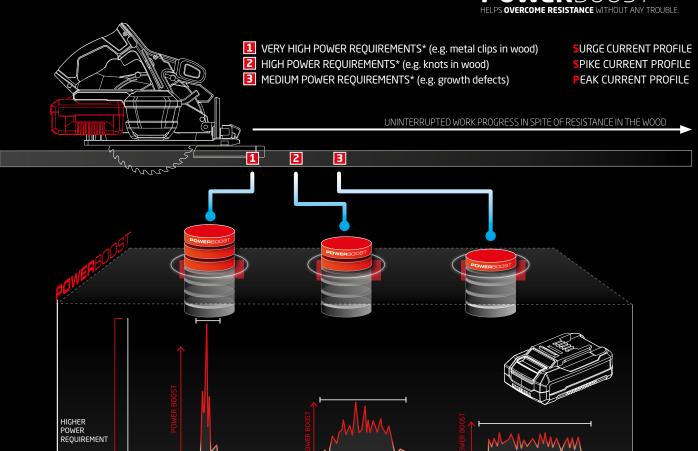

THE ADVANTAGES AT-A-GLANCE

POWER BOOST SURGE CURRENT PROFILE

- **TROUBLE-FREE** WORK
- MAXIMUM OPERATIONAL PERFORMANCE THANKS TO EFFICIENT ENERGY OUTPUT

POWER BOOST

SPIKE CURRENT PROFILE

PROTECTS DEVICES WITH ITS INTELLIGENT ELECTRONIC CONTROL SYSTEM





The lithium-ion lawn mower with high wheels. Short lawn at lightning speed.

Battery twin pack
for a range of tools

NEW Autumn 2016



One battery

for house and garden

for a wide variety of tools



EXPERT Plus

Battery
Charging time
Cutting height adjustment

Cutting width Grass box

Wheel diameter front

Wheel diameter rear

For lawn areas of up to approx.



CORDLESS LAWN MOWER

GE-CM 33 Li

 $2 \times 18 \, \text{V}$ Li-lon / $2.0 \, \text{Ah}$ / Power X-Change

2.0 h

5 cutting levels 25 – 65 mm / central

330 mm

30 l

150 mm

180 mm

200 m²



34.131.40



Article number

Mower with mulching function Art. no. / EAN

INNOVATIVE
TWIN PACK®

TECHNIOI OGIE





2 x 18 V = 36 V SUPERPOWER





HIGH WHEELS

Easy to handle - even on difficult terrain. High quality rubber wheels for a better traction.

(GE-CM 43 Li M; GE-CM 36 Li)



NEAR-EDGE MOWING

Perfect cutting results along walls and masonry. No need to trim lawn edges after mowing!

Battery twin pack for a range of tools



CORDLESS LAWN MOWER GE-CM 36 Li

2 x	c 18 V Li-lon / 3.0 Ah / Power X-Change
1.0) h
6 0	cutting levels 25 – 75 mm / central
36	0 mm
40	I
14	5 mm
22	0 mm
30	0 m ²





34.130.60



GE-CM 36 Li M 34.130.63 / 4006825594799



CORDLESS LAWN MOWER

GE-CM 43 Li M

2 x 18 V Li-lon / 4.0 Ah / Power X-Change
1.5 h
6 cutting levels 25 – 75 mm / central
430 mm
63 l
160 mm
245 mm
500 m ²

















EXPERT Plus

Article number

Battery	
Charging time	
Working width	
Working depth	
Number of blades	
Blade thickness	
For lawn areas of up to approx.	

2 x 18 V Li-lon; compatible with Power X-Change (not included in delivery)

Dependent on the battery type 350 mm 3 levels 3 | 6 | 9 mm + Parking position 16 (stainless steel) 1.5 mm

500 m²



34.206.50



Accessories (grass bag, rollers) see page 98.

The master battery power pack:

- Up to 40% lighter than standard nickel-cadmium cordless lawn mowers or petrol
- Cordless, light, powerful and quiet, with no emissions.
- Large rubber high wheels for perfect mowing comfort and traction.
- One battery charge is enough to mow 600 m² of lawn, depending on the mowing method and condition of the lawn (GE-CM 43 Li M)

Twin Pack

- 2 x 18 V / 1.5 5.2 Ah lithium-ion power.
- Ideal for joining the Power X-Change family for the first time: Buy 1 tool – use 2 batteries and 2 high-speed chargers for all other Power X-Change tools as well.
- Ready for work again after charging for just 1 hour.







One for all. Now there's even more.



POWER X-CHANGE System Battery 18 V / 1.5 Ah

Art. no.: 45.113.40





POWER X-CHANGE System Battery 18 V / 2.0 Ah

Art. no.: 45.113.95

EAN:





POWER X-CHANGE System Battery 18 V / 3.0 Ah

Art. no.: 45.113.41

EAN:





POWER X-CHANGE System Battery 18 V / 4.0 Ah

Art. no.: 45.113.96





POWER X-CHANGE System Battery 18 V / 5.2 Ah

Art. no.: 45.113.57





POWER X-CHANGE CHARGER

System Charger 18 V

Art. no.: 45.120.11





POWER X-CHANGE-STARTER-KIT

Set comprising 18 V / 1.5 Ah battery system (charging time 30 min) and high-speed charger system

Art. no.:

45.120.21

EAN:







CUTTINGS COLLECTOR

Perfect removal of the cuttings from the top of the hedge.

(GE-CH 1855 Li)



ADJUSTABLE HANDLE

For easy handling, compartment for 20 spare blades integrated in additional handle.

(GE-CT 18 Li)





CORDLESS HEDGE TRIMMER

GE-CH 1846 Li

18 V Li-lon / 1.5 Ah / Power X-Change
30 min
60 min
460 mm
520 mm
15 mm
-
Laser-cut, diamond grinded blade,

metal gearing



18 V Li-lon / 1.5 Ah / Power X-Change	

18 V Li-lon / 1.5 Ah / Power X-Change
30 min
60 min
550 mm
620 mm
15 mm
-
Rear handle swivels, cuttings collector,

front Ergo-Grip handle for horizontal and vertical cutting, laser-cut, diamond grinded blade



34.106.30



GE-CH 1855 Li - Solo 34.106.32 / 4006825587937

Master battery for a range of tools



CORDLESS LAWN TRIMMER

GE-CT 18 Li

18 V Li-Ion / 1.5 Ah / Power X-Change
30 min
40 min
•
•
-

Ø 240 mm

Incl. plastic blades (20 pcs.), motor head tilts 5 ways and swivels through 90°, storage box for blade







GE-CT 18 Li - Solo 34.111.72 / 4006825588255

Tool without charger and battery



Battery **Charging time Running time Cutting length Blade length Tooth spacing Cutting circle**

Features

Article number

Art. no. / EAN



CE @GS

GE-CH 1846 Li - Solo 34.106.42 / 4006825588293

34.106.40



REAR HANDLE SWIVELS

Optimum handling around the hedge.

(GE-CH 1855 Li)



MOTOR HEAD TILTS 5 WAYS

Easy cutting along vertical surfaces and lawn edges.

(GE-CT 18 Li)



Pole-mounted pruner: The versatile pruner with a long reach.

The quality's in the detail:

Maximum ergonomics +

90° swivel attachment (Pole mounted pruner) tiltable motor head + tiltable main handle

Attachment can be swiveled without tools +

Adjustable handle with quick fastener +

Chain tensioning without tools +

Laser-cut and diamond grinded blades +



2-in-1 function: Pole-Mounted Pruner & Hedge Trimmer

CORDLESS **MULTIFUNCTION TOOL**

GE-HC 18 Li T

Battery

POLE-MOUNTED PRUNER

Cutter rail length

Cutting speed

Cutter rail / chain

POLE HEDGE TRIMMER

Blade length

Tooth spacing

18 V Li-lon / 3.0 Ah / Power X-Change

200 mm 3.76 m/s

OREGON

450 mm

16 mm



DE: rating "GOOD - VERY GOOD

 ϵ

OREGON

Article number

Tool without charger and battery Art. no. / EAN 34.108.05



GE-HC 18 Li T - Solo 34.108.00 / 4006825601275





CHAIN TENSIONING WITHOUT TOOLS

TOOL HEAD SWIVELS THROUGH 90° - PATENTED

Thanks to the 90° swivel attachment it is no difficulty making horizontal cuts with the pole-mounted pruner.

(GE-HC 18 Li T; GE-LC 18 Li T)

diamond grinded blade

Lasercut and



(GE-HC 18 Li T; GE-LC 18 Li T)







CORDLESS POLE HEDGE TRIMMER GE-HH 18 Li T



Battery Cutting length Cutter rail length Cutting speed Cutter rail / chain

Features

Article number

18 V Li-lon / 3.0 Ah / Power X-Change 170 mm 200 mm 3.76 m/s **OREGON**

90° swivel attachment, multifunctional adjustment of the handle and motor head, metal gearing

Battery	
Cutting length	
Blade length	
Tooth spacing	
Cuts per minute	
Features	

18 V Li-lon / 3.0 Ah / Power X-Change 400 mm 450 mm 16 mm 1700 min⁻¹

Multifunctional adjustment of the handle and motor head, metal gearing









34.108.15



Article number







34.108.25



GE-HH 18 Li T - Solo 34.108.20 / 4006825604351

Tool without charger and battery Art. no. / EAN

GE-LC 18 Li T - Solo 34.108.10 / 4006825604337 Tool without charger and battery Art. no. / EAN



METAL GEARING

The equipment comes with rugged metal gearing for efficient power transmission and long product life.



ADJUSTABLE HANDLE AND MOTOR HEAD

Multifunctional adjustment of the handle and motor head for maximum ergonomics.





One for all. Now there's even more.



NEW 2016





Battery
Cutter rail length
Cutting speed
Oil tank capacity
Features

Article number

Tool without charger and battery Art. no. / EAN

CORDLESS CHAINSAW GE-LC 18 Li

18 V Li-Ion / 3.0 Ah / Power X-Change	
250 mm	
4.3 m/s	
225 ml	
Maximum ergonomics, chain tensioning without tools,	

OREGON

45.017.60

metal claw stop



GE-LC 18 Li - Solo 45.017.61 / 4006825608342

EXPERT Plus

Battery
Grinding wheel diameter (inside)
Grinding wheel diameter (outside)
Grinding wheel thickness
Features

Article number

Adjustable chain tensioning Adjustable depth stop



SAW CHAIN SHARPENER GE-CS 18 Li - Solo

Compatible with Power X-Change

23 mm

108 mm

3.2 mm

Adjustable depth stop, scale for precise setting of the grinding angle, swiveling chain tensioning mechanism

CE ILLINE

44.999.40





CHAIN TENSIONING WITHOUT TOOLS

(GE-LC 18 Li)

OPTIMAL ADJUSTMENT

Adjustable depth stop, grinding angle adjustment and chain stop to prevent excessive removal of metal from the

(GE-CS 18 Li - Solo)



EXACTLY THE POWER YOU NEED

Continuous adjustment of suction and blowing power with electronic speed control.

(GE-CL 18 Li E, GE-CL 36 Li E - Solo)



2-IN-1 FUNCTION: **GRASS AND SHRUB SHEARS**

(GE-CG 18 Li - Solo)

Speed control



CORDLESS LEAF BLOWER

GE-CL 18 Li E



2-in-1 function: vac and blower



GE-CL 36 Li E - Solo

Compatible with Power X-Change

210 km/h

-

Brushless motor, electronic speed control, adjustable additional handle, debris bag with window

2-in-1 function: Grass and shrub shears



AND SHRUB SHEARS

GE-CG 18 Li - Solo

Compatible with Power X-Change

-

100 mm

190 mm

8 mm

Blade change without tools, laser-cut blades

Article number

EXPERT Plus

Charging time

Max. running time

Cutting length of the shrub shears

Toothspading shrub shears

Blowing air flow Grass blade cutting width

Battery

Features



34.335.30



GE-CL 18 Li E - Solo 34.335.32 / 4006825610246 GE-CL 18 Li 34.335.00 / 4006825588262 GE-CL 18 Li Solo 34.335.02 / 4006825588279





34.336.00









34.103.70





Tool without charger and battery

Tool without speed control

Tool without speed control,

charger and battery

Art. no. / EAN

Art. no. / EAN

Art. no. / EAN

EASE OF USE

The harness and large guide wheels enhance convenience and ease of use.





2-IN-1 FUNCTION

Easy to change between blow and vacuum function without any tools.

(GE-CL 36 Li E - Solo)

Highlights / New products 2016 - Petrol lawn mowers

The 5-in-1 all-rounder with high wheels - the top model in the world of petrol lawn mowers!

Einhell - the No. 1 for petrol lawn mowers

- As the No. 1 on the market, Einhell is the top-selling brand for petrol lawn mowers in Germany, selling 50% more than the No. 2!
- Einhell also manufactures the most sold petrol lawn mower in Germany!
- Einhell is setting the standards in the market on all counts. Standards in technology, ergonomics, design, environmental compatibility, handling and ease of use.





For detailed information on all the petrol lawn mowers, please refer to page 28 and following.



BRAND GEARING

All new rear-wheel drive petrol lawnmower with high-quality GT – General Transmissions gearing for one speed or four.



HIGH WHEELS

Powerful 280 mm high wheels provide maximum traction and smooth travel, while supporting the strong look that defines the new Einhell generation of products.







QUALITY

The 10-year guarantee against rusting through of the mowing deck on the full range of Expert Petrol Lawn Mowers is just one example of our comprehensive quality initiative.





EASY TO CLEAN EASY TO STORE*

Has an ultra-user friendly vertical cleaning position — and is particularly easy to clean using the specially designed cleaning accessories supplied..

* This is possible if the tank has been emptied.

POWERED BY



EINHELL-EXPERT PETROL LAWN MOWERS POWERED BY BRIGGS & STRATTON



B&S performance, reliability and a long lifespan, with a major reduction in harmful emissions at the same time.



The EX series engines offer the best specs of the B&S E series in combination with the innovative ReadyStart® system including the unique B&S S2 start guarantee.



No choke, no priming, but a guaranteed engine start after two pulls at the latest for engines with ReadyStart. If the engine fails to start after two attempts, Briggs & Stratton will cover the costs of an inspection at a workshop in your area.

E

Dirty water and clean water pump. Nothing else like it: lowest suction and extraction height provides great versatility.





2-IN-1 MULTI-PURPOSE PUMPS - GREAT VERSATILITY

The new, patented pump generation — multi-purpose pumps which offer the combined advantages of clean water and dirty water pumps: extraction of shallow water down to 1 mm, also patented suction level adjustment for extraction of dirty water up to 30 mm particle size. A short twist of the foot on the pump changes the suction mode. It doesn't get easier than that.

WATER WITH LARGE PARTICLES





Do-it-yourself english lawn. **Cylinder lawn mower with TOP life cycle assessment.**





ADJUSTABLE COUNTER BLADE

All the counter blades on Einhell manual lawn mowers are adjustable - so the mowing spindle is able to "sharpen itself".



LARGE SMOOTH-RUNNING

Large, all-terrain wheels are smoothrunning for optimum use on lawns.



NO EMISSIONS AND QUIET AS A WHISPER

Kind to the user, the neighbors and the environment.





MANUAL LAWN MOWER **GE-HM 38 S-F**

+ Grass box included

+ Grass box included



MANUAL LAWN MOWER

GC-HM 30



GC-HM 40

Cutting width
Mowing spindle
Wheels
Plastic roller
Cutting height adjustment
Grass box
For lawn areas of up to approx.

38 cm
Ø 125 mm, 5 steel knives
Ø 220 mm
50 mm
4 cutting levels 13 - 38 mm
261
250 m²

30 cm
Ø 125 mm, 5 steel knives
Ø 218 mm
45 mm
Continuously 15 – 42 mm
161
150 m²

GC-HM 40	
40 cm	
Ø 125 mm, 5 steel knives	
Ø 218 mm	
46 mm	
4 cutting levels 15 – 35 mm	
27	
250 m ²	

Article number

34.141.61



Mower without grass box Art. no. / EAN GE-HM 38 S 34.141.65 / 4006825609714 34.141.12



34.141.27





CONTACT-FREE CUTTING MECHANISM

Cuts the grass deeply and cleanly: «Suitable for golf putting greens». You need less energy for mowing and noise exposure is reduced considerably.

(GE-HM 38 S-F; GE-HM 38 S)



EXACT AND KIND TO THE LAWN

The cylinder lawn mower produces mowing results «like grass cut with scissors».

Cordless Lawn Mowers boosted by TWIN PACK Technology

INNOVATIVE TWIN PACK® **TECHNOLOGY**

Battery twin pack for a range of tools

Battery twin pack for a range of tools

Einhell brushless motor Battery twin pack for a range of tools Incl. mulching kit



36 V **SUPERPOWER**









CORDLESS LAWN MOWER GE-CM 33 Li

GE-CM 36 Li


CORDLESS LAWN	MOWER
GE-CM 43 L i	i M

Battery
Charging time
Cutting height adjustment
Cutting width
Grass box
Wheel diameter front
Wheel diameter rear
For lawn areas of up to approx.

2 x 18 V Li-lon / 2.0 Ah / Power X-Change
2.0 h
5 cutting levels 25 – 65 mm / central
330 mm
301
150 mm
180 mm
200 m ²

-Change
ntral

www.selbst.de





34.131.40

34.130.60

CE







GE-CM 36 Li M 34.130.63 / 4006825594799 34.131.30



Article number



Mower with mulching function Art. no. / EAN

CORDLESS **LAWN MOWER** RG-CM 36 Li Li-ion battery 36 V / 2.6 Ah **Cutting width** 37 cm Grass box 40 I Art. no. 34.130.40



HIGH WHEELS

Easy to handle - even on difficult terrain. High quality rubber wheels for a better traction.

(GE-CM 43 Li M; GE-CM 36 Li)



Innovative electric lawn mowers: Mowing - mulching - grass collection



- + Handlebar with quick clamping function
- Level indicator
- Carrv handle
- + Handlebar with quick clamping function
- Level indicator

Carrv handle

- ♣ Handlebar with quick clamping function
- Level indicator
- Carrv handle









EXPERT

Mains voltage

Cutting height adjustment

Wheel diameter front

Wheel diameter rear

For lawn areas of up to approx.

Rated input

Cutting width

Grass box

ELECTRIC LAWN MOWER

GE-EM 1233

230 V ~ 50 Hz
1250 W
5 cutting levels 20 – 60 mm / central
330 mm
30 l
135 mm
135 mm
300 m²

ELECTRIC LAWN MOWER GE-EM 1536 HW

230 V ~ 50 Hz 1500 W 6 cutting levels 25 - 75 mm / central 360 mm 40 I 145 mm 220 mm 600 m²

ELECTRIC LAWN MOWER GE-EM 1843 HW

230 V ~ 50 Hz	
230 V ~ 30 HZ	
1800 W	
6 cutting levels 25 – 75 mm / cei	ıtral
430 mm	
63 l	
160 mm	
245 mm	
800 m ²	





34.001.92



Mower with mulching function

Article number



GE-EM 1233 M 34.001.93 / 4006825594638





GE-EM 1536 HW M

34.002.95 / 4006825594690

34.002.94











34.001.81



GE-EM 1843 HW M 34.001.82 / 4006825594683

Art. no. / EAN

GRASS BOX WITH

LEVEL INDICATOR



COMFORTABLE GUIDANCE BAR HEIGHT ADJUSTMENT

HANDY CARRY HANDLE



Packed with power, many attractive features.





HANDY
CARRY HANDLE




COMPACT

Folding long handle with quick clamping function for easy compact storage in the basement or garden shed.



HIGH WHEELS

Easy to handle - even on difficult terrain.

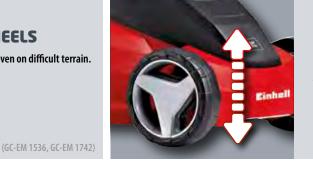

CENTRAL CUTTING HEIGHT ADJUSTMENT

(GC-EM 1536, GC-EM 1742)





+ Handlebar with quick clamping function Carry handle + Handlebar with quick clamping function

Carry handle



CLASSIC

Mains voltage **Rated input**

Cutting width Grass box

Cutting height adjustment

Wheel diameter front Wheel diameter rear

For lawn areas of up to approx.

ELECTRIC LAWN MOWER

GC-EM 1030

220 - 240 V ~ 50/60 Hz
1000 W
3 levels 30-70 mm / axial
300 mm
251
140 mm
140 mm
300 m ²

ELECTRIC LAWN MOWER

GC-EM 1536

220 - 240 V ~ 50 Hz
1500 W
5 levels 25 - 65 mm / central
360 mm
381
140 mm
200 mm
600 m ²

ELECTRIC LAWN MOWER

GC-EM 1742

230 - 240 V ~ 50 Hz	
1700 W	
6 levels 20-65 mm / central	
420 mm	
501	
150 mm	
230 mm	
700 m ²	

Article number

CE

34.001.22





34.001.50







34.001.60





GRASS BOX WITH LEVEL INDICATOR

(GC-EM 1536, GC-EM 1742)



GUIDANCE BAR HEIGHT ADJUSTMENT, QUICK FASTENERS INCLUDED

(GC-EM 1536, GC-EM 1742)

The 5-in-1 all-rounders with high wheels. EXPERT top models with Briggs & Stratton engines.



The innovative Bowden safety cable prevents the engine and cutting blade from starting up when the moweris in the cleaning position.







EASY TO CLEAN EASY TO STORE*

Has an ultra-user friendly vertical cleaning position — and is particularly easy to clean using the specially designed cleaning accessories supplied.

* This is possible if the tank has been emptied.



2-IN-1 MULTIFUNCTION BLADE

No need to buy a mulching blade. No need to change blades.



EXTRA BIG COLLECTION BOX

More capacity. Less discharging. Comfortable mowing. Including level indicator.





+	5-in-1 function
+	Rear-wheel drive

+	5-in-1 function
+	Rear-wheel drive
+	B&S Ready-Start

+	5-in-1 function
+	Variable speed
+	B&S Ready-Start









PETROL LAWN MOWER

EXPERT

PETROL LAWN MOWER **GE-PM 48 S HW B&S**

140 cm³ B&S 500 E Series 2.0 kW (at 2850 rpm)

PETROL LAWN MOWER **GE-PM 53 S HW B&S**

150 cm³ B&S 625 E Series

80 I (fabric, incl. level indicator)

2.3 kW (at 2850 rpm) 6 levels 25 – 70 mm / central

530 mm

200 mm 280 mm 1800 m²

GE-PM 53 VS HW B&S
150 cm ³ B&S 625 E Series
2.3 kW (at 2850 rpm)
6 levels 25 — 70 mm / central
530 mm
80 I (fabric, incl. level indicator)
200 mm
280 mm
1800 m²

Engine
Power
Cutting height adjustment
Cutting width
Grass box
Wheel diameter front
Wheel diameter rear
For lawn areas of up to approx.
High wheels

6 levels 25 – 70 mm / central
480 mm
75 I (fabric, incl. level indicator)
200 mm
280 mm
1600 m²
✓
(G G G G G G G G G G G G G G G G G G G









Article number



34.047.62









 ϵ 34.047.56





DEFLECTOR REAR EJECTOR FUNCTION

Cuttings ejected to the rear without a grass box, for maximum grass heights - mows grass where others have long given up.



CLEANING CONNECTION

Includes a hose connection for conventional garden hoses for cleaning immediately after use.

Our CLASSIC highwheeler with 5-in-1 function.





HIGH WHEELS

Powerful 280 mm high wheels provide maximum traction and smooth travel, while supporting the strong look that defines the new Einhell generation of products.



FRONT CHASSIS

Newly designed front chassis with integrated carry handle and mowing deck protection shield including grass comb





- 5-in-1 function
- Rear-wheel drive Cleaning position
- 5-in-1 function Rear-wheel drive Cleaning position
- 5-in-1 function Rear-wheel drive Cleaning position







CLASSIC

Cutting width Grass box

High wheels

Cutting height adjustment

Wheel diameter front Wheel diameter rear

For lawn areas of up to approx.

Engine Power

PETROL LAWN MOWER

GC-PM 47 S HW

139 cm³ Einhell OHV
1.8 kW (at 2850 rpm)
6 levels 25 – 70 mm / central
470 mm
75 I (fabric, incl. level indicator)
200 mm
280 mm
1400 m²
✓
5in1





Article number



34.047.55



PETROL LAWN MOWER

GC-PM 52 S HW

17	73 cm³ Einhell OHV
2.	8 kW (at 2850 rpm)
6	levels 25 – 70 mm / central
52	20 mm
80	l (fabric, incl. level indicator)
20	00 mm
28	30 mm
18	800 m ²
/	,
-	



34.047.60



PETROL LAWN MOWER

GC-PM 56 S HW

173 cm³ Einhell OHV
2.8 kW (at 2850 rpm)
6 levels 25 – 70 mm / central
560 mm
80 I (fabric, incl. level indicator)
200 mm
280 mm
2200 m²
J








34.047.65





PERFECT MOWING AND CATCHING RESULTS

The mowing and the catching of the cuttings are optimized by the combination of the special vortex technology and the grass box with level indicator.



EASY TO CLEAN, EASY TO STORE

Has an ultra-user friendly vertical cleaning position - and is particularly easy to clean while being gentle on the deck using the specially designed cleaning accessories supplied.

The classic mower with high wheels. E-Start available as an option.





CENTRAL EASY HEIGHT ADJUST-MENT CONTROL



FRONT CHASSIS

Newly designed front chassis with integrated carry handle and mowing deck protection shield including grass comb.

+	3-in-1 function
+	Rear-wheel drive
	Mulching function

+	2-in-1 function
+	Rear-wheel drive
+	E-Start function

+	4-in-1 function
+	Rear-wheel drive
+	Side discharge

+	4-in-1 function
+	Rear-wheel drive
+	E-Start function



PETROL LAWN MOWER GC-PM 46/2 S HW

139 cm³ Einhell OHV
1.9 kW (at 3000 rpm)
6 levels 30 – 80 mm / central
460 mm
70 I (fabric, incl. level indicator)
204 mm
280 mm
1400 m²
✓





34.043.60





PETROL LAWN MOWER GC-PM 46/2 S HW-E

139 cm³ Einhell OHV
1.9 kW (at 3000 rpm)
6 levels 30 – 80 mm / central
460 mm
70 I (fabric, incl. level indicator)
204 mm
280 mm
1400 m ²
✓



34.043.65





PETROL LAWN MOWER GC-PM 51/2 S HW

173 cm³ Einhell OHV
2.7 kW (at 2900 rpm)
6 levels 30 – 80 mm / central
510 mm
70 I (fabric, incl. level indicator)
204 mm
280 mm
1800 m ²
/



C€

34.043.30





PETROL LAWN MOWER GC-PM 51/2 S HW-E

de-Fri 31/2 3 ilw-c
173 cm³ Einhell OHV
2.7 kW (at 2900 rpm)
6 levels 30 – 80 mm / central
510 mm
70 I (fabric, incl. level indicator)
204 mm
280 mm
1800 m²
√











34.043.55






E-START FUNCTION

Convenient, easy start-up with maintenance-free starter battery, charges while you are mowing.
Additional charger is also in the box.

(GC-PM 46/2 S HW-E, GC-PM 51/2 S HW-E)



LEVEL INDICATOR

Grass box with built-in level indicator.

Robust and with optional extras. Quality at the best price.







+	Level indicator
+	Central
	height adjustment
+	Rear-wheel drive

+	Level indicator
+	Central
	height adjustment
4	Rear-wheel drive









PETROL LAWN MOWER GH-PM 40 P

118 cm³ Einhell OHV
1.6 kW (at 2800 rpm)
3 levels 32 – 62 mm/single wheel
400 mm
45 I (fabric, incl. level indicator)
800 m²



139 cm³ Einhell OHV
1.9 kW (at 3000 rpm)
9 levels 30 - 80 mm / central
460 mm
50 l (fabric, incl. level indicator)
1200 m²

PETROL LAWN MOWER GC-PM 46 S

139 cm³ Einhell OHV
1.9 kW (at 3000 rpm)
9 levels 30 - 80 mm / central
460 mm
50 l (fabric, incl. level indicator)
1400 m²

PETROL LAWN MOWER
GC-PM 46/1 S

4011140723
135 cm³ Einhell OHV
2.0 kW (at 2900 rpm)
5 levels 32 – 70 mm / central
460 mm
60 I (fabric, incl. level indicator)
1400 m²















34.047.30



GC-PM 46 M 34.047.31 / 4006825607529







34.047.20



GC-PM 46 S-M 34.047.21 / 4006825607536








34.007.17





LEVEL INDICATOR

Grass box with built-in level indicator.



REAR-WHEEL DRIVE

User-friendly operation thanks to self-propelled function.

(GC-PM 46 S, GC-PM 46 S-M, GH-PM 46/1 S)



Fantastic promotions. Einhell lawn mowers with Briggs & Stratton engines.





HIGH WHEELS

Powerful 280 mm high wheels provide maximum traction and smooth travel, while supporting the strong look that defines the new Einhell generation of products.

(GC-PM 51/2 S HW B&S)



MULCHING FUNCTION

Fertilizes lawns and supports good lawn care.

(GC-PM 51/2 S HW B&S)

EINHELL PETROL LAWN MOWERS POWERED BY BRIGGS & STRATTON



B&S performance, reliability and a long lifespan, with a major reduction in harmful emissions at the same time.



No choke, no priming, but a guaranteed engine start after two pulls at the latest for engines with ReadyStart. If the engine fails to start after two attempts, Briggs & Stratton will cover the costs of an inspection at a workshop in your area.





+	B&S Ready-Start
+	4-in-1 function
+	Rear-wheel drive
+	High wheels



CLASSIC

Cutting width Grass box

High wheels

Article number

Cutting height adjustment

Wheel diameter front Wheel diameter rear For lawn areas of up to approx.

Engine Power

PETROL LAWN MOWER GC-PM 46/1 S B&S
125 cm ³ B&S 450 E Series
1.65 kW (at 2900 rpm)

125 cm ³ B&S 450 E Series	
1.65 kW (at 2900 rpm)	
9 levels 30 – 80 mm / central	
460 mm	
50 I (fabric, incl. level indicator)	
178 mm	
216 mm	
1400 m ²	
•	



34.045.85





PETROL LAWN MOWER GC-PM 51/2 S HW B&S

150 cm ³ B&S 625 E Series
2.3 kW (at 2900 rpm)
6 levels 30 – 80 mm / central
510 mm
70 l (fabric, incl. level indicator)
204 mm
280 mm
1800 m²
✓



34.043.40





SIDE DISCHARGE

Specially designed for large areas and orchards.

(GC-PM 51/2 S HW B&S)



REAR-WHEEL DRIVE

All new rear-wheel drive petrol lawnmower are endued with high-quality ${\it GT-General\,Transmissions\,gearings.}$



(GC-PM 46/1 S B&S, GC-PM 51/2 S HW B&S)

Intensive treatment for your lawn.





COMPACT

INDUCTION MOTOR

Folding long handle with quick clamping function for easy compact storage in the basement or garden shed.

(GE-SA 1435, GE-SA 1640, GE-SC 35 Li)



Also shown in the illustration is the grass box available separately.

CENTRAL DEPTH SETTING

Fast, easy adjustment to the desired depth.

(GE-SA 1435, GE-SA 1640, GE-SC 35 Li)









CLASSIC

ELECTRIC SCARIFIER / AERATOR

GC-SA 1231

Mains voltage	230 V ~ 50 Hz
Rated input	1200 W
Working width	310 mm
Working depth	3 levels 3 7 9 mm + Parking position
Number of blades	8 (double blades)
Blade thickness	2 mm
Number of aerating claws	42
Nylon grass bag	281



 ϵ

34.206.20



Tool without aerating function/grass bag Art. no. / EAN

Article number

GC-ES 1231

34.206.10 / 4006825603798



ELECTRIC SCARIFIER / AERATOR

GE-SA 1435

230 V ~ 50 Hz
1400 W
350 mm
3 levels 3 6 9 mm + Parking position
20 (stainless steel)
1.5 mm
26
281



GE-SA 1640

230 V ~ 50 Hz	
1600 W	
400 mm	
4 levels 3 6 9	12 mm + Parking position
20 (stainless st	eel)
1.5 mm	
30	













34.205.90

48 I





34.205.61





QUICK **TOOL CHANGE**

The scarifying and aerating rollers can be changed quickly using the supplied tools.



ELECTRIC SCARIFIER / AERATOR


RG-SA 1433

Working width 33 cm **Rated input** 1400 W Art. no. 34.205.20



PS-Power for effective lawn care.





CENTRAL WORKING DEPTH ADJUSTMENT

Easy and quick adjustment to the desired working depth.



ECONOMICAL AND POWERFUL

The 1-cylinder, 4-stroke engine enables high power with low consumption - cordless and independent.



COMFORTABLE GUIDANCE BAR HEIGHT ADJUSTMENT

Simple adjustment of the bar on the body height.



GRASS BOX INCLUDED

The grass box is included in delivery and does not need to be purchased as a separate accessory.

+	2-in-1 function
+	Metal housing
+	Grass box included

+	3-in-1 function
+	Compact
+	Grass box included

The quality's in the detail:

Comfortable guidance bar height adjustment +

Grass box included +

Central working depth adjustment +

4-stroke petrol engine + powerful, cordless and independent



CLASSIC

PETROL SCARIFIER

GC-SC 2240 P

NEW 2016	
EXPERT	

PETROL SCARIFIER / AERATOR

GE-SA 1335 P

Engine	118 cm³; Einhell OHV	53 cm³; Einhell OHV
Power	2.2 kW (at 3600 rpm)	1.3 kW (at 6800 rpm)
Working width	400 mm	350 mm
Working depth	7 levels + Parking position	3 levels 3 6 9 + Parking position
Number of blades	18	20 (stainless steel)
Blade thickness	1.5 mm	1.5 mm
Number of aerating claws	-	26
Nylon grass bag	45 l	281



 ϵ

34.200.20



 ϵ

34.200.30







Article number



COMBINATION TOOL

For scarifying, aerating and catching with a single tool.

(GE-SA 1335 P)



QUICK TOOL CHANGE

The scarifying and aerating rollers can be changed quickly using the supplied tools.

(GE-SA 1335 P)

Trimming - easy to use even in the deepest depths of your garden.







CORDLESS LAWN TRIMMER GE-CT 18 Li

	Battery
	Charging time
	Running time
	Cutting circle
	Plastic blades
\	Motor head swivels
D	Motor head tilts
N	Telescopic long handle
- (Additional handle
	Features
4	

Article number

Art. no. / EAN

Tool without charger and battery

18 V Li-lon / 1.5 Ah / Power X-Change
30 min
40 min
Ø 240 mm
20 pcs.
✓
✓
✓
✓
Incl. plastic blades (20 pcs.), motor head tilts 5 ways and swivels through 90°, storage box for blade

Mains voltage / Rated input Cutting circle Nylon trimmer line Motor head swivels Motor head tilts Automatic jog line feed Telescopic long handle Additional handle Flower guard Features	
Nylon trimmer line Motor head swivels Motor head tilts Automatic jog line feed Telescopic long handle Additional handle Flower guard	Mains voltage / Rated input
Motor head swivels Motor head tilts Automatic jog line feed Telescopic long handle Additional handle Flower guard	Cutting circle
Motor head tilts Automatic jog line feed Telescopic long handle Additional handle Flower guard	Nylon trimmer line
Automatic jog line feed Telescopic long handle Additional handle Flower guard	Motor head swivels
Telescopic long handle Additional handle Flower guard	Motor head tilts
Additional handle Flower guard	Automatic jog line feed
Flower guard	Telescopic long handle
<u> </u>	Additional handle
Features	Flower guard
	Features







Article number

34.111.70



GE-CT 18 Li - Solo 34.111.72 / 4006825588255

Tool with 450 W power rating and 26 cm cutting circle (Art. no. / EAN)



ADJUSTABLE HANDLE

Easy handling, easily adjustable handle makes work a relaxing experience.

> (GE-CT 18 Li; GC-ET 4025; GC-ET 4526; GE-ET 5027; GE-ET 4526)



PLASTIC BLADES

Includes plastic replacement blades (20 pcs.) and space for storing the blades in the handle.

(GE-CT 18 Li)



MOTOR HEAD CAN BE ROTATED 90° IN BOTH DIRECTIONS

Easy cutting along vertical surfaces and lawn edges. Incl. flower guard.

(GE-CT 18 Li; GC-ET 4025; GC-ET 4526; GE-ET 5027; GE-ET 4526)



MOTOR HEAD CAN BE TILTED TO 5 SETTINGS

Easy cutting along vertical surfaces and lawn edges.

(GC-ET 4025; GC-ET 4526; GE-ET 5027; GE-ET 4526, GE-CT 18 Li Kit)



ELECTRIC LAWN TRIMMER

GC-ET 3023

230 V ~ 50 Hz / 300 W
Ø 23 cm
Ø 1.5 mm / 6 m
Automatic jog line feed
fixed

+ Powerful motor
+ Telescopic
aluminum shaft

Tilting
trimmer head

CLASSIC

ELECTRIC LAWN TRIMMER
GC-ET 4025

GC-ET 4025

230 V ~ 50 Hz / 400 W

Ø 25 cm

Ø 1.6 mm / 6 m

+/- 90°

✓

Automatic jog line feed

✓

adjustable

+ Powerful motor
+ Twin line cutting with fully automatic line feed
Complete with 3 thread spools

ELECTRIC LAWN TRIMMER
GC-ET 4530 Set

230 V ~ 50 Hz/450 W

Ø 30 cm

Ø 1.4 mm/10 m

+/- 90°

✓

Fully automatic line feed

✓

adjustable

Split shaft, fully automatic line feed, twin line cutting

+ Powerful motor
+ Telescopic
aluminum shaft
Tilting
trimmer head

Guide wheel

EXPERT
ELECTRIC LAWN TRIMMER

GE-ET 5027

230 V ~ 50 Hz / 500 W Ø 27 cm

Ø 1.6 mm/6 m +/- 90° ✓

Automatic jog line feed

adjustable

/

Removable guide wheel

Cable strain relief

34.020.50



CE STATE

34.020.60



GC-ET 4526 34.020.70 / 4006825598155 CE

34.020.22



CE ANDERSON

34.020.90



GE-ET 4526 34.020.80 / 4006825598131



GUIDE WHEEL

Effortless handling - the nice 'n' easy way to work. Easy to fix at the telescopic alu shaft for flexible use.

(GE-ET 5027; GE-ET 4526)



ELECTRIC LAWN TRIMMER

RG-ET 7535

Mains voltage 230 V ~ 50 Hz
Rated input 750 W
Cutting circle Ø 35 cm
Art. no. 34.012.90





High-quality and powerful.
Where lawn mowers come up against their limits.



The quality's in the detail:

- + Easy-Start
- + Autochoke
- + Anti-vibration system
- + Comfortable carrying belt
- + Metal cutting blade
- + Line spool
- + Spindle lock system



SPLIT SHAFT

User-friendly plug-together system - child's play to store away, ready for use in next to no time.



EASY-START INCL.
AUTOCHOKE AND DECOMPRESSION VALVE

For a fast start.

(GE-BC 43 AS)





ANTI-VIBRATION SYSTEM

3-way rubber shock absorber on handle keeps tiredness at bay.





EXPERT

Power
Capacity
Engine
Petrol tank volume
Cutting circle (blade)
Cutting circle (nylon trimmer line)
Line thickness
Automatic jog line feed
Features



carrying belt

Intertek

CE

34.046.00

1.0 kW	
32.6 cm ³	
2-stroke engine	
1.01	
Ø 25.5 cm (3T)	
Ø 46 cm	
Ø 2.4 mm	
✓	
Aluminium split shaft, anti-vibration	

Aluminium split shaft, anti-vibration system, wall bracket, decompression function, wall bracket, comfortable valve, comfortable carrying belt





1.25 kW 42.7 cm³ 2-stroke engine

1.01 Ø 25.5 cm (3T) Ø 46 cm Ø 2.4 mm











COMFORTABLE CARRYING BELT

Lets you work in comfort and makes handling easy.



SPINDLE LOCK SYSTEM

Blade and line spool are easily replaced with just a push of the button.



High torque scythes and grass trimmers: Quality at the best price.





Article number

CLASSIC	GC-P1 25381A5
Power	0.75 kW
Capacity	25.4 cm ³
Engine	2-stroke engine
Petrol tank volume	0.45
Cutting circle (blade)	-
Cutting circle (nylon trimmer line)	Ø 38 cm
Line thickness	Ø 2 mm
Automatic jog line feed	✓
Features	Aluminium shaft, split shaft, autochoke







ALUMINIUM SHAFT

Minimal weight keeps tiredness at bay.



COMFORTABLE CARRYING BELT

Lets you work in comfort and makes handling easy.









0.75 kW
25.4 cm ³
2-stroke engine
0.451
Ø 23 cm (3T)
Ø 42 cm
Ø 2 mm
✓
Aluminium shaft, split shaft, autochoke



GH-BC 43 AS	•
1.25 kW	
42.7 cm ³	
2-stroke engine	
1.01	
Ø 25.5 cm (3T)	
Ø 42 cm	
Ø 2.4 mm	
✓	
Aluminium shaft, split shaft, autochoke	





34.019.53















34.019.80



34.019.73







SPLIT SHAFT

You can easily dismantle the stable aluminium split shaft on the Einhell petrol scythe for easy transport and space-saving storage.



AUTOCHOKE + PRIMER

The petrol scythes / petrol lawn trimmer are easy to start.

Cultivated helpers in the kitchen garden.







RUGGED **CULTIVATOR BLADES**



CABLE STRAIN RELIEF

(GC-RT 1440 M; GC-RT 7530)



COMPACT

Folding long handle for easy, compact storage.



POWERFUL 4-STROKE ENGINE

Reliable, economical, quiet, independent of the voltage supply.

(GC-MT 1636, GC-MT 3036, GC-MT 3060 LD)





+	Cordless and independent
+	Brake shoe
+	 Swiveling guide wheel

*	Cordless and independent
+	Brake shoe
+	Swiveling guide wheel
	1









ELECTRIC TILLER GC-RT 1440 M

220 - 240 V ~ 50 Hz
1400 W
400 mm
max. 20 cm
Ø 20 cm
6 pcs.

PETROL TILLER **GC-MT 1636**

1.3 kW (at 3000 rpm)
4-stroke engine, 99 cm³
360 mm
max. 20 cm
Ø 26 cm
4 pcs.

PETROL TILLER **GC-MT 3036**

3.0 kW (at 3600 rpm)
4-stroke engine, 139 cm³
360 mm
max. 23 cm
Ø 26 cm
4 pcs.

GC-MT 3060 LD

3.0 kW (at 3600 rpm)
4-stroke engine, 139 cm³
600 mm
max. 23 cm
Ø 26 cm
6 pcs.

 ϵ

34.310.40







 ϵ

34.303.10









34.302.90









34.302.80





MANOEUVRABLE

The swiveling wheel improves handling – that makes it easier to change location.

(GC-RT 1440 M, GC-MT 1636, GC-MT 3036, GC-MT 3060 LD)



ERGONOMICS

The height can be set to a comfortable position using the adjustable handles.

(GC-MT 1636, GC-MT 3036, GC-MT 3060 LD)





Cordless freedom around the hedge. Powerful - ergonomic - light.











CORDLESS HEDGE TRIMMER GE-CH 1846 Li

CORDLESS HEDGE TRIMMER GE.CH 1855 Li

Battery	
Charging time	
Running time	
Cutting length	
Blade length	
Tooth spacing	
Features	

18 V Li-Ion / 1.5 Ah / Power X-Change
30 min
60 min
460 mm
520 mm
15 mm
Laser-cut, diamond grinded blade,

	de-ch 1055 ti
_	18 V Li-lon / 1.5 Ah / Power X-Change
	30 min
	60 min
	550 mm
	620 mm
	15 mm
	Rear handle swivels, cuttings collector, front Ergo-grip handle for horizontal and vertical cutting, laser-cut and dia-





metal gearing

34.106.40





mond grinded blade, metal gearing





Article number



Tool without charger and battery Art. no. / EAN GE-CH 1846 Li - Solo 34.106.42 / 4006825588293 GE-CH 1855 Li - Solo 34.106.32 / 4006825587937



COVER WITH WALL BRACKET

For perfect storage and optimum protection of the blades.



REAR HANDLE SWIVELS

Optimum handling around the hedge. Ideal for both horizontal and vertical cutting.

(GE-CH 1855 Li)





Sharp tool with the cutting edge. Powerful - ergonomic - light.













ELECTRIC HEDGE TRIMMER

GH-EH 4245

CLASSIC

ELECTRIC HEDGE TRIMMER

GC-EH 4550

C	Į,	5	3	C

ELECTRIC HEDGE TRIMMER

GC-EH 5550

Mains voltage	
Rated input	
Cutting length	
Blade length	
Tooth spacing	
Cuts per minute	
Features	

230 V ~ 50 Hz
420 W
450 mm
510 mm
16 mm
3200
Low weight and easy handling, large hand protection shield

230 V ~ 50 Hz
450 W
500 mm
560 mm
16 mm
3200
Low weight and easy handling,

230 V ~ 50 Hz
550 W
500 mm
560 mm
26 mm
3000
Large hand protection shield, cuttings collector





DE: rating "VERY GOOD"







Article number

34.034.60









COVER WITH WALL BRACKET

For perfect storage and optimum protection of the blades.



IMPACT GUARD AND ALUMINIUM COVER ON CUTTERS



LASERCUT AND DIAMOND GRINDED BLADES

Blades stay robust and sharper for longer.



METAL GEARING

All hedge trimmers come with rugged metal gearing for efficient power transmission and long product life.



+ Rotatable rear handle + Cuttings collector Rotatable rear handleCuttings collector

+ Cutter stop < 0,5 sec

+ Aluminium cover

+ Rotatable rear handle

+ Cuttings collector



CLASSIC

ELECTRIC HEDGE TRIMMER

GC-EH 6055

230 V ~ 50 Hz
600 W
550 mm
610 mm
26 mm
3000
Large hand protection shield, cuttings collector



 $C \in$

34.033.50





EXPERT

ELECTRIC HEDGE TRIMMER

GE-EH 6056

230 V ~ 50 Hz

600 W

520 mm

560 mm

25 mm

3200

Rotatable rear handle, large hand protection shield, cuttings collector



CE

34.037.53





ELECTRIC HEDGE TRIMMER

RG-EH 6053

230 V ~ 50 Hz
600 W
530 mm
600 mm
20 mm

Rotatable rear handle, large hand protection shield, cuttings collector, additional switch for overhead work



DF: rating _GOOD"/_PRICE TIP

34.035.97





ELECTRIC HEDGE TRIMMER

RG-EH 7160

230 - 240 V ~ 50 Hz 710 W 600 mm 660 mm 24 mm 3200

Rotatable rear handle, large hand protection shield, cuttings collector, additional switch for overhead work





34.036.72





SWIVEL HANDLE FOR OPTIMUM HANDLING

Quick and easy adaptation to every working situation for optimum handling - for trimming vertically and horizontally without tiring.

(GE-EH 6056, RG-EH 6053, RG-EH 7160)



CUTTINGS COLLECTOR - FOR PERFECT REMOVAL OF THE CUTTINGS

(GC-EH 5550, GC-EH 6055, GE-EH 6056, RG-EH 6053, RG-EH 7160)

Easy start with Autochoke - cuts through faster to your target with more power.





ANTI-VIBRATION SYSTEM

Smooth-running 2-stroke engine with power to spare offers comfort and power even for long work sessions.



AUTO-CHOKE SYSTEM

For easy starting even after a lengthy





+	Rotatable rear handle
+	Anti-vibration handle
+	Autochoke







PETROL HEDGE TRIMMER GC-PH 2155

EXPERT
PETROL HEDGE TRIMMER
GE-PH 2555 A

Power	
Capacity	
Cutting length	
Blade length	
Tooth spacing	
Cuts per minute	

Article number

0.6 kW
21.3 cm ³
550 mm
640 mm
28 mm
2050

0.85 kW
24.5 cm ³
550 mm
610 mm
28 mm
1900





34.038.50









34.038.35









ERGO-GRIP HANDLE

For a horizontal and vertical cut.



LASERCUT BLADES INCL. PROTECTIVE COVER

Blades stay robust and sharper for longer. Extra safety provided by protective cover.

(GE-PH 2555 A)



The versatile pruner with a long reach. **Maximum freedom of movement with**

cordless equipment.



Maximum ergonomics + 90° swivel attachment (Pole mounted pruner) tiltable motor head + tiltable main handle

Attachment can be swiveled without tools +

Adjustable handle with quick fastener +

Chain tensioning without tools +

Laser-cut and diamond grinded blades





2in1: Pole-mounted

18 V Li-lon / 3.0 Ah / Power X-Chang

MULTIFUNCTION TOOL GE-HC 18 Li T

Battery
POLE-MOUNTED PRUNER
Cutter rail length
Cutting speed
Cutter rail / chain
POLE HEDGE TRIMMER
Blade length
Tooth spacing

Article number

Art. no. / EAN

3.76 m/s **OREGON** 450 mm 16 mm DE- rating GOOD - VERY GOOD







200 mm

34.108.05



GE-HC 18 Li T - Solo 34.108.00 / 4006825601275





Tool without charger and battery

AUTOMATIC CHAIN LUBRICATION



CHAIN TENSIONING WITHOUT TOOLS

TOOL HEAD SWIVELS THROUGH 90° - PATENTED

Thanks to the 90° swivel attachment it is no difficulty making horizontal cuts with the pole-mounted pruner.

(GE-HC 18 Li; GE-LC 18 Li)

diamond grinded blade

Lasercut and

† Tool head swivels through 90°

(GE-HC 18 Li T; GE-LC 18 Li T)







CORDLESS
POLE HEDGE TRIMMER

Plus

GE-HH 18 Li T



Cutting length

Cutting speed

Features

Cutter rail length

Cutter rail / chain

Article number

18 V Li-lon / 3.0 Ah / Power X-Change
170 mm
200 mm
3.76 m/s
OREGON
90° swivel attachment, multifunctional adjustment of the handle and motor head, metal gearing

Battery
Cutting length
Blade length
Tooth spacing
Features

18 V Li-lon / 3.0 Ah / Power X-Change
400 mm
450 mm
16 mm
Multifunctional adjustment of the handle and motor head, metal gearing









34.108.15



GE-LC 18 Li T - Solo 34.108.10 / 4006825604337 Lining

Article number

Art. no. / EAN

(€







34.108.25



GE-HH 18 Li T - Solo 34.108.20 / 4006825604351

Tool without charger and battery Art. no. / EAN



Infinitely lockable aluminium telescopic handle for comfortable tree care operations even at great heights.



Tool without charger and battery

ADJUSTABLE HANDLE AND MOTOR HEAD

Multifunctional adjustment of the handle and motor head for maximum ergonomics.



Reaching up and up taking you to new heights.





230 - 240 V ~ 50 Hz
900 W
410 mm
480 mm
20 mm
Rear handle swivels, metal gearing, lasercut blades, adjustable carrying strap with quick-release facility
C C LONG LASTING SHARPHES SHARPHES CAPORD GRANGE










The quality's in the detail:

- + Adjustable handle with quick fasteners
- + Chain tensioning without tools
- + Automatic chain lubrication
- + Magnetic cutter rail fixing for easy chain change
- + Stop claws



ANGLE ADJUSTMENT WITHOUT TOOLS

Cutting angle adjustment for ergonomic operation.



SPLIT SHAFT

For easy transport and space-saving storage



TELESCOPIC FIBRE-GLASS HANDLE

Light, robust and handy thanks to modern material.



AUTOMATIC CHAIN LUBRICATION



Light and easy to handle Extendable 1.88 - 2.65 m



ELECTRIC POLE-MOUNTED PRUNER

GC-LC 1815 T

Battery / Mains voltage
Charging time / Rated input
Cutting length
Cutter rail length
Cutting speed
Oil tank capacity
Cutter rail / chain
Features

18 V Li-lon / 1.5 Ah 60 min 200 mm 242 mm 2.83 m/s 20 ml **OREGON** Adjustable carrying strap with quick-release facility











As a set with a beltsystem Art. no. / EAN

Article number



Extendable



ELECTRIC POLE-MOUNTED PRUNER

GC-EC 750 T

220 - 240 V ~ 50 Hz
750 W
180 mm
200 mm
11 m/s
60 ml
OREGON

Adjustable carrying strap with quick-release facility









Extendable 2.30 - 2.90 m



ELECTRIC POLE-MOUNTED PRUNER

GE-EC 720 T

GE-EC 720 I
230 V ~ 50 Hz
710 W
180 mm
200 mm
13 m/s
110 ml
OREGON
Adjustable additional handle,

split shaft, motor head tilts 15°







45.016.90



GE-EC 720 T Kit 45.016.80 / 4006825587722



CHAIN TENSIONING WITHOUT TOOLS

(GC-EC 750 T, GE-EC 720 T)



BELTSYSTEM FOR POLE PRUNERS

For GE-EC 720 T

Art. no. 45.016.99 EAN 4006825598247



Battery powered, no tangled cables.





CHAIN TENSIONING AND CHANGING WITHOUT TOOLS

(GE-LC 18 Li)

+ Small, lightweight, convenient

+ Chain tensioning without tools









EXPERT Plus

CORDLESS CHAINSAW

Ī
ш

Battery	
Charging time	
Cutter rail length	
Cutting length	
Cutting speed	
Oil tank capacity	
Features	

18 V Li-lon / 3.0 Ah	
120 min	
250 mm	
230 mm	
4.3 m/s	
220 ml	
Metal daw stop	

18 V Li-Ion / 3.0 Ah / Power X-Change
60 min
250 mm
230 mm
4.3 m/s
225 ml
Maximum ergonomics, chain tensioning without tools, metal claw stop





45.017.50







45.017.60



GE-LC 18 Li - Solo 45.017.61 / 4006825608342

Tool without charger and battery Art. no. / EAN

Article number






Large claw stop made of metal for your safety.



AUTOMATIC CHAIN LUBRICATION

Exactly the right amount of lubricating oil is always applied to the chain from the oil tank which has a large practical level window.



Amazing features and quality.





CHAIN TENSIONING AND CHANGING WITHOUT TOOLS



METAL GEARING

All chainsaws come with rugged metal gearing for efficient power transmission and long product life.

Chain tensioning without tools Chain tensioning without tools Chain tensioning without tools Chain tensioning without tools Soft start

Slimline design











ELECTRIC CHAINSAW

GH-EC 1835

230 - 240 V ~ 50 Hz 1800 W 350 mm 325 mm 13.5 m/s 160 ml **OREGON**



GH-EC 2040 230 - 240 V ~ 50 Hz 2000 W 406 mm 375 mm 13.5 m/s 160 ml OREGON DE: rating "GOOD"

EXPERT ELECTRIC CHAINSAW GE-EC 2240

220 – 240 V ~ 50 Hz 2200 W 406 mm 375 mm 15 m/s 160 ml **OREGON**

EXPERT ELECTRIC CHAINSAW GE-EC 2240 S

220 - 240 V ~ 50 Hz 2200 W 405 mm 375 mm 14.5 m/s 150 ml **OREGON**



45.017.10









tioner let 15 street
















45.017.70



RG-EC 2240 45.002.20 / 4006825534986





METAL CLAW STOP

Large claw stop made of metal for your safety.



SLIMLINE DESIGN

Convenient slimline design for easy handling.

(GE-EC 2240 S)

For times when you need to bare your teeth.





METAL CLAW STOP

Large claw stop made of metal for your safety.



AUTOCHOKE + PRIMER

Makes starting the petrol chainsaw really quick and easy.



CHAIN TENSIONING WITHOUT TOOLS

METAL GEARING

All chainsaws come with rugged metal gearing for efficient power transmission and long product life.

(GC-PC 1535 ITC)

+ Perfect for tree care

Small and handy

Chain tensioning without tools

Plenty of power

NEW 2016













PETROL CHAINSAW

GC-PC 930 I

0.9 kW	
25.4 cm ³	
305 mm	
240 mm	
21 m/s	
230 ml	
160 ml	



350 mm	
280 mm	
22 m/s	
390 ml	
210 ml	
	FITTED WITH



1.5 kW
41 cm ³
350 mm
335 mm
21 m/s
260 ml
210 ml

PETROL CHAINSAW GC-PC 2040 I

2.0	kW
52 (cm³
400	mm
330	mm
22 1	m/s
560	ml
240	ml



45.018.40



CE



45.018.61







45.018.27

 ϵ







45.018.51







AUTOMATIC CHAIN LUBRICATION

Exactly the right amount of lubricating oil is always applied to the chain from the oil tank.



ANTI-VIBRATION HANDLE

The specially designed anti-vibration handle cushions impacts to enhance user comfort and reduce fatigue.

To have the sharpest edge for the toughest jobs, you need accessories.

The quality's in the detail:

Compact +

Einhell

Swiveling chain tensioning mechanism +

Adjustable depth stop +

Scale for precise setting of the grinding angle +





SAW CHAIN SHARPENER

GE-CS 18 Li - Solo

Battery

Grinding wheel diameter (inside)

Grinding wheel diameter (outside)

Grinding wheel thickness

Features

Compatible with Power X-Change

23 mm

108 mm 3.2 mm

Adjustable depth stop, scale for precise setting of the grinding angle, swiveling chain tensioning

mechanism

Article number



44.999.40



Why sharpen chainsaw chains?

- Better cutting performance, speeds up the work
- Reduced accident risk
- Lower fuel consumption, lower emissions
- Less wear on the chain and saw
- Reduced vibration for added working comfort
- Lower exertion, reduces fatigue and enhances safety

Good to know

Re-sharpening the chain in time gives you the best grinding results and reduces metal removal. Sharpening takes less time and increases the life of the chain.



FOREST SAFETY
HELMET

Art. no. 45.004.80





OPTIMAL ADJUSTMENT

Adjustable depth stop, grinding angle adjustment and chain stop to prevent excessive metal removal from the chain.



SCALE

Precision grinding angle adjustment with high-grade detent functions for simplified adjustment.





SAW CHAIN SHARPENER

GC-CS 85 E

Mains voltage	220 - 240 V ~ 50 Hz
Rated input	85 W
ldling speed	4800 min ⁻¹
Grinding wheel diameter (inside)	23 mm
Grinding wheel diameter (outside)	108 mm
Grinding wheel thickness	3.2 mm
Features	Adjustable depth stop, Scale for cise setting of the grinding an chain tensioning

220 2101 30112	
85 W	
4800 min ⁻¹	
23 mm	
108 mm	

for prengle,

Automatic chain fixation

NEW Autumn 2016



CLASSIC

SAW CHAIN SHARPENER

GC-CS 85 F

220 - 240 V ~ 50 Hz
85 W
4800 min ⁻¹
23 mm
108 mm
3.2 mm

Depth stop, scale for precise grinding angle setting, automatic chain fixation, transparent viewing window

Light

NEW Autumn 2016



CLASSIC

SAW CHAIN SHARPENER

GC-CS 235 E

230 V ~ 50 Hz
235 W
3000 min ⁻¹
22 mm
145 mm
3.2 mm

Adjustable depth stop, Scale for precise setting of the grinding angle, chain tensioning, transparent viewing window, work light, swivel grinding head for roof angle adjustment

Article number

(E

44.999.20



Model 2015 Art. no. / EAN

45.000.89 / 4006825612264

ϵ

44.999.30



ϵ

44.999.10





CANISTER

45.013.25 Art. no.





CHAINSAW TRESTLE

45.000.67 Art. no.





SAWING TRESTLE

Art. no. 44.999.80





Innovative electric leaf vacuums. For clearing away the leaves shed in

autumn.



Speed control







CORDLESS LEAF BLOWER

GE-CL 18 Li E



GE-CL 36 Li E - Solo

Battery
Charging time
Max. running time
Blowing air flow
Suction power
Features

18 V Li-lon / 1.5 Ah / Power X-Change
30 min
180 min
210 km/h
•
Electronic speed control,
Soft grip

C	ompatible with Power X-Change
-	
-	
2	10 km/h
5	33 m³/h
C	rushless motor, electronic speed ontrol, adjustable additional handle, atch bag with viewing window

Mains voltage
Rated input
Blowing air flow
Suction power
Idle speed
Catch bag volume
Shredder function





34.335.30





Article number




GE-CL 18 Li E - Solo 34.335.32 / 4006825610246

GE-CL 18 Li

34.335.00 / 4006825588262

GE-CL 18 Li Solo

34.335.02 / 4006825588279



charger and battery Art. no. / EAN



EXACTLY THE POWER YOU NEED

Continuous adjustment of suction and blowing power with electronic speed control.



2-IN-1 FUNCTION

Easy to change between blow and vacuum function without any tools.

(GE-CL 36 Li E Solo, Electric leaf vacuums)



CLEANING COVER

The cover is easy to access, providing a practical way of cleaning the very rugged impeller.

(Electric leaf vacuums)

speed control

Additonal handle

Adjustable harness

Electronic



EASE OF USE

The harness and large guide wheels enhance convenience and ease of use.

(Leaf vacuums)













EXPERT
ELECTRIC LEAF VACUUM
GE-EL 3000 E
230 V ~ 50 Hz
3000 W
300 km/h
1080 m³/h
7000 –13000 min ⁻¹
501
12:1



2500 W 240 km/h

650 m³/h 7000 - 13500 min⁻¹

40 I

10:1





34.332.90







34.332.26








34.332.25





ECO POWER THANKS TO OPTIMIZED BLOWER IMPELLER AND TUBE CONNECTOR

An optimized blower impeller with modified vane geometry creates a perfect airflow. The improved plug-in fittings and optimized collection-bag mounting optimize the perfect airflow.



Cutting edge tidiness for the garden.



CLASSIC

Mains voltage Rated input Idle speed Max. branch diameter Capacity of catch box

Article number

INCLUDING PLUN-GER AND GARDEN RUBBISH BAG

(GH-KS 2440)



EASY FILLING

Large funnel opening makes it easier to insert the clippings.



EASY TRANSPORT

The large wheels, which are gentle on the lawn, and the carry handle make it easy to quickly move the shredder around.





GARDEN SHREDDER **GH-KS 2440**

230 - 240 V ~ 50 Hz 2400 W S6 (40%) / 2000 W S1 4500 min⁻¹ 40 mm





ELECTRIC ROLLER SHREDDER GC-RS 2540

230 V ~ 50 Hz

2500 W S6 (40%) / 2000 W S1 40 min⁻¹ 40 mm

Silent Catch box Fast rotting process



ELECTRIC ROLLER SHREDDER

GC-RS 2540 CB

230 - 240 V ~ 50 Hz 2500 W S6 (40%) / 2000 W S1 40 min⁻¹ 40 mm 60 I





ELECTRIC ROLLER SHREDDER

GC-RS 2845 CB

230 - 240 V ~ 50 Hz 2800 W S6 (40%) / 2300 W S1 40 min⁻¹ 45 mm 60 I





34.303.40



 ϵ

34.306.20



 ϵ

34.305.98





34.306.30





EASY MAINTENANCE

The funnel can be swung down for maintenance and cleaning.

(GH-KS 2440)



TRANSPARENT COLLECTION BOX

Simple collection, easy to transport. The transparent sides let you easily see how full the box is.

(GC-RS 2540 CB, GC-RS 2845 CB)

Perfect manageability. Flexible quality for lawn edges and shrubs.





LASERCUT BLADES

High-grade, laser-cut blades for perfect cutting results.

(GE-CG 18 Li Solo, GE-CG 7,2 Li, GE-CG 10,8 Li)



BLADE CHANGE WITHOUT TOOLS

Easy blade swapping without tools for flexible garden care.





CORDLESS **GRASS AND SHRUB SHEARS**

GE-CG 18 Li - Solo

Compatible with Power X-Change

100 mm

190 mm

8 mm







34.103.70







CORDLESS GRASS AND SHRUB SHEARS

GC-CG 3.6 Li

3.6 V Li-lon / 1.3 Ah

60 min

3 – 5 h

70 mm

100 mm

8 mm



34.104.55



GC-CG 3.6 Li WT 34.104.56 / 4006825610482 2-in-1 function: Grass and shrub shears



CORDLESS **GRASS AND SHRUB SHEARS**

GE-CG 7.2 Li

7.2 V Li-lon / 1.3 Ah

85 min

2 h

85 mm

130 mm

8 mm

DE: rating "TOP PRICE/PERFORMANCE" DE: rating "GOOD - VERY GOOD"





34.103.81



2-in-1 function: Grass and shrub shears





CORDLESS **GRASS AND SHRUB SHEARS**

GE-CG 10.8 Li

10.8 V Li-lon / 1.3 Ah

100 min

2 h

100 mm

190 mm

8 mm



DE: rating "GOOD - VERY GOOD"





34.103.94



GE-CG 10.8 Li WT 34.103.97 / 4006825607796



METAL GEARING

High-quality, durable metal gearing for optimum power transmission and long service life.

(GE-CG 18 Li-Solo, GE-CG 10.8 Li)



TELESCOPIC HANDLE

Telescopic handle with large wheels for effortless gardening in a standing position.

(GC-CG 3.6 Li, GE-CG 10.8 Li)

Dirty water and clean water pump. Nothing else like it: lowest suction and extraction height provides great versatility.



SHALLOW WATER EXTRACTION OF DIRTY WATER WITH LARGE PARTICLES



The quality's in the detail:

Top- quality mechanical seal +

Universal hose connection +

Ergonomic carry handle +



2-IN-1 MULTI-PURPOSE PUMPS -**GREAT VERSATILITY**

The new, patented pump generation – multi-purpose pumps which offer the combined advantages of clean water and dirty water pumps: extraction of shallow water down to 1 mm, also patented suction level adjustment for extraction of dirty water up to 30 mm particle size. A short twist of the foot on the pump changes the suction mode. It doesn't get easier than that.





SIMPLY ROTATE TO CHANGE SETTING

Switch from clean water to dirty water mode and vice versa just by adjusting a knob.



TOP-QUALITY MECHANICAL SEAL

We use top-quality mechanical seals for our ECO Power 2-in-1 multipurpose pumps. This reduces the friction and wear on our pumps – so they last longer.

2-in-1 function





+	2-in-1 function
+	Stable base





2-IN-1 MULTI PURPOSE PUMP **GE-DP 5220 LL ECO**

230 V ~ 50 Hz

13500 l/h / 7.5 m

520 W

7 m

20 mm

1 mm

10 mm

35° C

10 m

GE-DI	, 1330 FF ECO
230 V ~ 50	0 Hz
730 W	
16500 l/h	/ 8.5 m
7 m	
30 mm	
1 mm	
10 mm	
approx. 4	7.8 mm (G 1½) male thread
35° C	
10 m	

2-IN-1 MULTI PURPOSE PUMP



EXPERT

Article number



41.707.80



approx. 47.8 mm (G 11/2) male thread



41.707.90






FOR THE DIRTY WORK... RIGHT TO THE LAST DROP

These pumps are built to handle heavily contaminated water. They easily cope with dirt particles up to 20 mm or 30 mm in size (depending on the model). A unique highlight: the 2-in-1 pumps can be used at water levels as low as 10 mm. They then suck up everything right to the last drop (min. suction height 1 mm). They pump all of the water out Dirty water of flooded cellars, even when the water level is very low!



High delivery rate - low consumption.





IMPROVED FLOW DUCT

Improved hydrodynamic flow duct for reduced flow resistance. Optimum, unobstructed pumping action — even with heavily contaminated water.






WATER OUTLET AT


Practical water outlet on the top of the pump, making the pump suitable for narrow shafts as well.



TOP-QUALITY MECHANICAL SEAL

We use high-grade mechanical seals on our ECO Power multi-purpose pumps to reduce friction and wear and increase the life of the pump.













DIRTY WATER PUMP GE-DP 3925 ECO

CC D. 3323 CC
230 V ~ 50 Hz
390 W
10000 l/h / 6 m
7 m
25 mm
approx. 47.8 mm (G 1½) male threa
35° C
10 m

DIRTY WATER PUMP GE-DP 6935 ECO

230 V ~ 50 Hz
690 W
17500 l/h / 9 m
7 m
35 mm
approx. 47.8 mm (G 1½) male thread
35° C
10 m

DIRTY WATER PUMP GE-DP 7935 N ECO

230 V ~ 50 Hz
790 W
20000 l/h / 9 m
7 m
35 mm
approx. 47.8 mm (G $1\frac{1}{2}$) male thread
35° C
10 m







Article number

EXPERT

Mains voltage **Rated input**

Max. delivery capacity / height Max. submersion depth Foreign particles up to **Hose connection** Max. water temperature Length of mains cable









41.707.20







OPTIMIZED IMPELLER

Optimized impeller with modified vane geometry ensures perfect flow characteristics. This results in powerful and fault-free operation, a maximum flow rate and minimal electricity.



FLOAT SWITCH

An infinitely height-adjustable float switch lets you choose between continuous operation and a preselected ON and OFF switching level.

Quality in stainless steel. No job is too dirty for them.





The quality's in the detail:

- Top-quality mechanical seal +
- Infinitely variable float switch +
- Carry handle with integrated cable rewind +
 - Universal hose connector +



FLOAT SWITCH

An infinitely height-adjustable float switch lets you choose between continuous operation and a pre-selected ON and OFF switching level.



TOP-QUALITY MECHANICAL SEAL

The high-grade mechanical seal reduces friction and wear, guaranteeing long life.

Stainless steel pump housing Carry handle

Robust plastic housing Carry handle

Stainless steel pump housing Carry handle







DIRTY WATER PUMP

RG-DP 7525 N

Mains voltage	230 V ~ 50 Hz
Rated input	750 W
Max. delivery capacity / height	16000 l/h / 7 m
Max. submersion depth	5 m
Foreign particles up to	25 mm
Hose connection	approx. 47.8 mm (G 1½) female thread
Max. water temperature	35° C
Length of mains cable	10 m

Article number



230 V ~ 50 Hz
850 W
17000 l/h / 9 m
5 m
35 mm
approx. 47.8 mm (G 1½) female thread
35° C
10 m

DIRTY WATER PUMP RG-DP 1035 N

230 V ~ 50 Hz
1050 W
18500 l/h / 8 m
5 m
35 mm
approx. 47.8 mm (G 1½) female thread
35° C
10 m



41.706.11





41.706.24







41.706.70





INTEGRATED CABLE REWIND

Thanks to the practical cable rewind, the power cable can be neatly rewound and the pump is then quickly ready for use again at any time.




UNIVERSAL HOSE CONNECTOR

To enable hoses with different diameters to be connected to the unit there is a universal connection made of high-grade plastic.

For all dirty business - pumps with clean-up guarantee.





FLOAT SWITCH

An infinitely height-adjustable float switch lets you choose between continuous operation and a pre-selected ON and OFF switching level.



TOP-QUALITY MECHANICAL SEAL

The high-grade mechanical seal reduces friction and wear, guaranteeing long life.

- + Robust plastic housing + Universal connector
- + Stainless steel pump housing + Universal connector
- Stainless steel pump housingUniversal connector
- + Robust plastic housing + Universal connector



GH-DP 3730

230 V ~ 50 Hz
370 W
9000 l/h / 5 m
5 m
30 mm
approx. 47.8 mm (G 1½) female thread
35°C
10 m



DIRTY WATER PUMP

GH-DP 5225 N

230 V ~ 50 Hz
520 W
10000 l/h / 7 m
5 m
25 mm
approx. 47.8 mm (G 1½) female thread
35° C
10 m



DIRTY WATER PUMP

GH-DP 6315 N

230 V ~ 50 Hz
630 W
17000 l/h / 8 m
5 m
15 mm
approx. 47.8 mm (G 1½) female thread
35° C
10 m



GC-DP 7835

230 V ~ 50 Hz
780 W
15700 l/h / 8 m
7 m
35 mm
approx. 47.8 mm (G $1\frac{1}{2}$) female thread
35° C
10 m

(E

41.704.71





41.704.81





41.704.91





41.706.82





INTEGRATED CABLE REWIND

Thanks to the practical cable rewind, the power cable can be neatly rewound and the pump is then quickly ready for use again at any time.



CARRY HANDLE

A practical carry-handle enables the water pump to be moved quickly and flexibly to wherever it is needed, even in the garden.

They pump like bodybuilders.



The quality's in the detail:

- + Infinitely variable float switch
- + Top-quality mechanical seal
- + Practical carry handle
- + Extremely robust and stable





TOP-QUALITY MECHANICAL SEAL

The high-grade mechanical seal reduces friction and wear, guaranteeing long life.



FLOAT SWITCH

An infinitely height-adjustable float switch lets you choose between continuous operation and a pre-selected ON and OFF switching level.



CARRY HANDLE

A practical carry-handle enables the water pump to be moved quickly and flexibly to wherever it is needed.

Stainless steel pump housing <u>Universal</u> adapter set



Double mechanical seal

Carry handle + Incl. 6 meters of rope



CLASSIC

Mains voltage
Rated input
Max. delivery capacity / height
Max. submersion depth
Foreign particles up to
Hose connection
Max. water temperature
Length of mains cable

DIRTY WATER PUMP GC-DP 1020 N

230 V ~ 50 Hz
1000 W
18000 l/h/9 m
5 m
20 mm
approx. 47.8 mm (G 1½) female thread
35° C
10 m

DIRTY WATER PUMP GC-DP 1340 G

230 V ~ 50 Hz
1300 W
23000 l/h / 10 m
5 m
40 mm
approx. 59.6 mm (G 2) female thread
35° C
10 m

Article number



41.707.73







41.707.42





UNIVERSAL **ADAPTER SET INCLUDED**

Adapter with universal connections for 19 mm (¾"), 25 mm (1"), 32 mm (1¼") and 38 mm (1½") hoses.

(GC-DP 1020 N)



HIGH-GRADE COMPONENTS

The upper housing, lower housing and impeller are made of solid cast steel, while the intake housing and motor housing are made of corrosion-resistant stainless steel.

(GC-DP 1340 G)

They pump it away efficiently they pump it away clean.



The quality's in the detail:

- Practical carry handle +
- Universal hose connector +
- Integrated cable rewind +



INTEGRATED **CABLE REWIND**

Thanks to the practical cable rewind, the power cable (10 m) can be neatly rewound and the pump is then quickly ready for use again at any time.



FLOAT SWITCH

An infinitely height-adjustable float switch lets you choose between continuous operation and a pre-selected ON and OFF switching level.

(GH-SP 2768, RG-SP 300 RB)



TOP-QUALITY MECHANICAL SEAL

The high-grade mechanical seal reduces friction and wear, guaranteeing long life.

(GH-SP 2768)



CARRY HANDLE

A practical carry handle enables the water pump to be moved quickly and flexibly to wherever it is needed, even in the garden.

+ Float switch
+ Integrated
cable rewind



CLASSIC SUBMERSIBLE PUMP

GH-SP 2768

Mains voltage	230 V ~ 50 Hz
Rated input	270 W
Max. delivery capacity / height	6800 l/h / 5.5 m
Max. submersion depth	5 m
Foreign particles up to	5 mm
Extraction of shallow water down to	8 mm
Hose connection	approx. 47.8 mm (G 1½) female thread
Max. water temperature	35° C
Length of mains cable	10 m

For flat suction
 Integrated float switch
 Automatic / continuous duty switch



EXPERT
SUBMERSIBLE PUMP
GE-SP 750 LL

230 V ~ 50 Hz
750 W
15000 l/h / 10 m
5 m
5 mm
2 mm
approx. 42 mm (G 1¼) male thread
35°C
10 m



Flexible goose neck

ment for extensions

Storage compart-

RAIN BARREL PUMP

230) V ~ 50 Hz
300) W
460	00 l/h / 11 m
7 m	1
2.5	mm
-	
app	prox. 26.4 mm (G ¾) male thread
35°	·(C
10	m

 ϵ

Article number

41.704.42



((

41.706.66



(E

41.704.34





UNIVERSAL HOSE CONNECTOR

To enable hoses with different diameters to be connected to the unit there is a universal connection made of high-grade plastic.

(GH-SP 2768, GE-SP 750 LL)



FLEXIBLE GOOSE NECK

The pump has a flexible swan-neck with stopcock for individual positioning of the garden hose, as well as a rain barrel bracket.

(RG-SP 300 RB)



Still waters run deep. No problem with these pumps.



The quality's in the detail:

- + Multilevel impeller system
- + Thermal motor cut-out
- + Pump housing made of rust-proof stainless steel
- + Sturdy suspension eyelets
- + Robust pressure connection

EXCEPTIONAL PERFORMANCE

Submersible pressure pumps and deep well pumps are particularly suitable for supplying clear water from reservoirs, wells and shafts. They are designed for pumping water from great depths and passing it on at high pressure.



MULTILEVEL IMPELLER SYSTEM

For the maximum delivery rate for the given power rating the pumps have been designed with 3-stage (GC-DW 900 N) or 10-stage (GC-DW 1300 N) impeller system.

The integral thermal motor cut-out protects the pump against overloading.



FLOAT SWITCH

The pump switches on and off automatically depending on the position of the height-adjustable float switch.

(GC-DW 900 N)



STURDY SUSPEN-SION EYELETS

Both pumps have practical suspension eyelets for fastening a rope. These make it easy to lower the pump into the well shaft.

 Pressure connection with stainless steel insert

+ Top-quality mechanical seal



SUBMERSIBLE PRESSURE PUMP

GC-DW 900 N

230 V ~ 50 Hz
900 W
6000 l/h / 32 m
7 m
approx. 33.3 mm (G 1) female thread
approx. 33.3 mm (G 1) female thread 35° C
35°C

Non-return valve
Stainless steel
dirt screen

+ Incl. 22 m of rope



GC-DW 1300 N

230 V ~ 50 Hz
1300 W
5000 l/h / 65 m
20 m
approx. 47.8 mm (G 1½) female thread
35° C
2 m
23 m

CE Rost free

Article number

CLASSIC

Mains voltage Rated input

Max. delivery capacity / height
Max. submersion depth
Hose connection
Max. water temperature
Length of mains cable
Length of connecting cable

41.709.64





41.709.44





TOP-QUALITY MECHANICAL SEAL

The high-grade mechanical seal reduces friction and wear, guaranteeing long life.



EXTERNAL SWITCHBOX

The external switchbox with a 23 m connecting cable enables optimum, comfortable and user-friendly operation from the surface.

(GC-DW 1300 N)

Powerful helpers for watering the garden.

The quality's in the detail:

- Rugged and reliable +
- Large water filler hole +
- Practical carry handle +
 - Water drain screw +
 - On/Off switch +







Our technical expertise - for the good of the environment.

Each of us is responsible for the environment in which we live. We want to use our knowledge and technology to make efficient use of energy. ECO Power stands for the use of efficient technology. It ensures that we use every opportunity to significantly improve the ratio of energy input to performance output for our products.


 $\begin{tabular}{ll} \textbf{ECO Power stands for:} & \cdot \text{ Optimized energy efficiency} - \text{high} \\ & \text{performance with low} \\ \end{tabular}$

energy consumption

- Intelligent and technically sophisticated product development
- · Top-quality components
- · Well thought-out product design

Extreme durability:

- · Top-quality components
- · First-class workmanship
- $\cdot \ Long \ service \ life-guaranteed!$





LARGE WATER FILLER HOLE

The extra large water filler hole at the top side allows the simple filling with water before starting the garden pump to grant the fast suction effect.

(GE-GP 5537 E, GE-GP 9041 E)



WATER DRAIN SCREW

After use and before stowage, the occurring residual water can be disposed through the practical water drain screw at the bottom of the housing without residues.



INTEGRATED PREFILTER

The integrated prefilter keeps possible soiling away from the pump circulation reliably in order to prevent the early wear of the high-quality pump parts.

(GE-GP 5537 E, GE-GP 9041 E)



QUICK PUMP START

The practical non-return valve prevents water from flowing back from the pump when switched off. So the pump does not need to be filled again when it is started again.

(GE-GP 5537 E, GE-GP 9041 E)


+	Water filler hole
+	Water drain screw
	Carry handle

Pre-filter
 with integrated
 non-return valve
 Carry handle

+ Pre-filter
with integrated
non-return valve



CLASSIC GARDEN PUMP GC-GP 6538

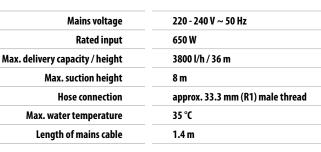



EXPERT
GARDEN PUMP
GE-GP 5537 E

230 V ~ 50 Hz

590 W

3750 l/h / 38 m

8 m

approx. 33.3 mm (R 1) female thread

35 °C

1.5 m



GARDEN PUMP
GE-GP 9041 E

230 V ~ 50 Hz
900 W
4100 l/h / 48 m
8 m
approx. 33.3 mm (R 1) female thread
35° C
1.5 m

CE

Article number

41.802.80





41.801.34











41.822.75







ELECTRONIC FLOW SWITCH

Turns garden pumps into domestic waterworks in no time.

Art. no. 41.742.2





GARDEN PUMP SET

GC-GP 6538 Set Item identical to GC-GP 6538 (41.802.80), but garden hose (7 m) included.

Art. no. 41.802.83

Fully automatic with dry running guard. Water supply for house and garden.

Automatic function

NEW 2016



AUTOMATIC WATERWORKS GC-AW 6333

230 V ~ 50 Hz 630 W 3300 l/h / 36 m

approx. 33.3 mm (R 1) female thread approx. 42 mm (R 11/4) male thread

1.5 m

35° C

 ϵ

41.767.30

4 006825 609226

Article number

Mains voltage

Max. suction height **Pressure connection**

Suction connection

Max. water temperature

Length of mains cable

Max. delivery capacity / height

Rated input



LARGE WATER FILLER HOLE

The extra large water filler hole at the top side allows the simple filling with water before starting the garden pump to grant the fast suction effect.



INTEGRATED PREFILTER

The integrated prefilter keeps possible soiling away from the pump circulation reliably in order to prevent the early wear of the high-quality pump parts.



QUICK PUMP START

The practical non-return valve prevents water from flowing back from the pump when switched off. So the pump does not need to be filled again when it is started again.





Dry operation protection	+	Dry operation protection
Carry handle	+	Carry handle
ECO Power	+	ECO Power
and the same of th		- The second sec









CLASSIC **AUTOMATIC WATERWORKS GC-AW 9036**

230 V ~ 50 Hz
900 W
3600 l/h / 43 m
7 m
approx. 33.3 mm (R 1) female thread
approx. 42 mm (R 1¼) male thread
approx. 42 mm (R 1¼) male thread 35° C

CCHSSIC
AUTOMATIC WATERWORKS
GC-AW 1136

230 V ~ 50 Hz
1100 W
3600 l/h / 46 m
7 m
approx. 33.3 mm (R 1) female thread
approx. 33.3 mm (R 1) female thread approx. 42 mm (R 1¼) male thread
approx. 42 mm (R 1¼) male thread

GE-AW 5537 E

230 V ~ 50 Hz
590 W
3750 l/h / 38 m
8 m
approx. 33.3 mm (R 1) female thread
approx. 33.3 mm (R 1) female thread
35° C
1.5 m

GE-AW 9041 E 230 V ~ 50 Hz 900 W 4100 l/h / 48 m

8 m approx. 33.3 mm (R 1) female thread approx. 33.3 mm (R 1) female thread 35° C 1.5 m

 ϵ

41.767.20



 ϵ

41.767.16



CE

41.766.54





((



41.770.04





AUTOMATIC FUNCTION

The pump is turned on and off automatically when water is required.



WATER DRAIN SCREW

After use and before stowage, the occurring residual water can be disposed through the practical water drain screw at the bottom of the housing without residues.



Low-cost clear water supply for house and garden.





The quality's in the detail:

- + Versatile
- + User-friendly
- + Large water filler hole
- + Easily visible pressure gauge
- + Integrated pressure switch
- + 20 litres pressure tank
- + Practical water drain screw



INTEGRATED **PREFILTER**

The integrated prefilter keeps possible soiling away from the pump circulation reliably in order to prevent the early wear of the high-quality pump parts.

(GE-WW 5537 E, GE-WW 9041 E)



QUICK PUMP START

The practical non-return valve prevents water from flowing back from the pump when switched off. So the pump does not need to be filled again when it is started again.

(GE-WW 5537 E, GE-WW 9041 E)

20 LITRES PRESSURE TANK

The pressure tank - with an optimum size of 20 liters — stores the water temporarily so that the pump does not have to start up every time water is withdrawn. This goes easy on the pump and extends its service life.



INTEGRATED PRESSURE GAUGE

The plainly visible pressure allows the water pressure to be monitored at all times.

+	Pressure switch
+	Pressure gauge
+	Water drain screw



+	Prefilter with non-return valve
+	3 carry handles
+	ECO Power







WATERWORKS

GE-WW 5537 E



35°C
approx. 33.3 mm (R 1) female thread
1.5 bar / 3.0 bar
201
8 m
3750 l/h / 38 m
590 W
230 V ~ 50 Hz

230 V ~ 50 Hz
900 W
4100 l/h / 48 m
8 m
201
1.5 bar / 3.0 bar
approx. 33.3 mm (R 1) female thread
35° C
1.5 m

Mains voltag
Rated inpu
Max. delivery capacity / heigh
Max. suction heigh
Pressure tank volum
Approx. activate / cut off pressur
Hose connectio
Max. water temperatur
Length of mains cahl

220 - 240 V ~ 50 Hz
650 W
3800 l/h / 36 m
8 m
201
1.5 bar / 3.0 bar
approx. 33.3 mm (R 1) male thread
35° C
1.4 m









Article number

41.731.90

(E

4 006825 603484

41.731.75

4 006825 587265

41.734.44





WATER DRAIN SCREW

After use and before stowage, the occurring residual water can be disposed through the practical water drain screw at the bottom of the housing without residues.



WATERWORKS SET

GC-WW 6538 Set

Item identical to GC-WW 6538 (41.731.90), but suction hose (7 m) included.

Art. no. 41.731.93



Powerful water supply with an independent power source.





WATER DRAIN SCREW

After use and before stowage, the occurring residual water can be disposed through the practical water drain screw at the bottom of the housing without residues.

The quality's in the detail:

- Mains independent water supply +
 - Economical 4-stroke engine +
 - Water filler port +
 - Practical water drain screw +



tubular steel frame Sturdy pump housing





CLASSIC PETROL WATER PUMP


GH-PW 18 GE-PW 45

4-stroke engine 1.8 kW (2.5 HP)

2.0 bar 3800 min⁻¹

EXPERT PETROL WATER PUMP

4-stroke engine
4.8 kW (6.5 HP)
23000 l/h
26 m
2.6 bar
3600 min ⁻¹
3.61



Article number



41.713.90

12000 l/h 20 m

1.41





41.713.70





Standard accessories GH-PW 18: 2 hose adapters 38.1 mm (1.5") 1 strainer (hose connection 38.1 mm 2 reducers onto 33.3 mm (R 1") male thread



Standard accessories GE-PW 45:

2 adapters 50.8 mm (2") (hose connector) 2 adapters 33.3 mm (R 1) male thread (thread connector) 2 adapters 47.8 mm (R 11/2) male thread (thread connector) 1 intake cage 50.8 mm (2") (hose connector)



POWER X-CHANGE





Article description	Art. no.	EAN	
Battery Power X-Change 1.5 Ah	45.113.40	4006825590586	4 006825 590586
Battery Power X-Change 2.0 Ah	45.113.95	4006825610369	4 006825 610369
Battery Power X-Change 3.0 Ah	45.113.41	4006825590593	4 006825 590593
Battery Power X-Change 4.0 Ah	45.113.96	4006825610376	4 006825 610376
Battery Power X-Change 5.2 Ah	45.113.57	4006825598865	4 006825 598865
Charger Power X-Charger	45.120.11	4006825587029	4 006825 587029

SPARE BLADES

DIV. MULCH BLADES

LAWN MOWERS





Article description	Art. no.	EAN	
Spare blade	34.054.20	4006825602661	4 006825 602661
Spare blade	34.054.30	4006825595376	4 006825 595376
Spare blade	34.054.40	4006825595369	4 006825 595369
Spare blade	34.054.50	4006825577488	4 006825 577488
Spare blade	34.054.51	4006825610604	4 006825 610604
Spare blade	34.054.52	4006825610611	4 006825 610611
Spare blade	34.054.60	4006825572964	4 006825 572964
Spare blade	34.054.75	4006825573770	4 006825 573770
Spare blade	34.054.85	4006825584509	4 006825 584509
Spare blade	34.055.28	4006825548877	4 006825 548877
Spare blade	34.055.29	4006825548884	4 006825 548884
Spare blade	34.055.90	4006825563108	4 006825 563108
Spare blade	34.056.60	4006825605273	4 006825 605273
Spare blade	34.057.85	4006825600735	4 006825 600735
Spare blade	34.058.00	4006825608786	4 006825 608786
Spare blade	34.058.05	4006825608793	4 006825 608793
Spare blade	34.058.10	4006825608809	4 006825 608809
Mulch blade	34.056.50	4006825605266	4 006825 605266
Mulch blade	34.056.70	4006825605280	4 006825 605280
Mulch blade	34.057.80	4006825572810	4 006825 572810
Spare battery	45.114.30	4006825573787	4 006825 573787
Catch bag	34.211.12	4006825609707	4 006825 609707

_	awn	nower	\$	/•	, cairi	et t	imme	is hedge	tring	ers	/«	ole po	Junted Junted	Printe Printe	ers I	pols	/6	hains	ams	/	eate	oners at var	Juns		/6	pas and strub streats
GE-CM 33 Li	GE-CM 36 Li	GE-CM 36 Li M	GE-CM 43 Li M	GE-SC 35 Li - Solo	GE-CT 18 Li	GE-CT 18 Li - Solo	GE-CH 1846 Li	GE-CH 1846 Li - Solo	GE-CH 1855 Li	GE-CH 1855 Li - Solo	GE-HC 18 Li T	GE-HC 18 Li T - Solo	GE-LC 18 Li T	GE-LC 18 Li T - Solo	GE-HH 18 LiT	GE-HH 18 LiT - Solo	GE-LC 18 Li	GE-LC 18 Li - Solo	GE-CS 18 Li - Solo	GE-CL 18 Li E	GE-CL 18 Li E - Solo	GE-CL 18 Li	GE-CL 18 Li - Solo	GE-CL 36 Li E - Solo	GE-CG 18 Li - Solo	
					•	•	•	•	•	•									•	•	•	•	•		•	
•					•	•	•	•	•	•									•	•	•	•	•		•	
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	

Lawn mowers																																	
																		δ															 Ω
				_	_			_	≱	W M	A	W W				GE-PM 48 S HW B&S	GE-PM 53 S HW B&S	GE-PM 53 VS HW B&S	8	>	>	¥	GC-PM 46/2 S HW-E	ΜH	GC-PM 51/2 S HW-E					_		B&S	GC-PM 51/2 S HW B&S
38.5	GE-HM 38 S-F	33 Li	36 Li	GE-CM 36 Li M	GE-CM 43 Li M	36 Li	1233	GE-EM 1233 M	GE-EM 1536 HW	GE-EM 1536 HW M	GE-EM 1843 HW	GE-EM 1843 HW M	1030	1536	1742	18 S H	53 S H	33 VS I	GC-PM 47 S HW	GC-PM 52 S HW	GC-PM 56 S HW	GC-PM 46/2 S HW	46/2 S	GC-PM 51/2 S HW	51/25	40 P	46	46 M	46 S	GC-PM 46 S-M	GC-PM 46/1 S	GC-PM 46/1 S B&S	51/25
GE-HM 38 S	E-HM	GE-CM 33 Li	GE-CM 36 Li	E-CM	E-CM	RG-CM 36 Li	GE-EM 1233	E-EM	E-EM	E-EM	E-EM	E-EM	GC-EM 1030	GC-EM 1536	GC-EM 1742	E-PM	E-PM	E-PM	C-PM	C-PM	C-PM:	C-PM.	C-PM,	C-PM	C-PM	GH-PM 40 P	GC-PM 46	GC-PM 46 M	GC-PM 46 S	C-PM,	C-PM,	C-PM,	C-PM
פֿ	פֿ	פֿ	ט	פ	פֿ	\ <u>\</u>	פֿ	פֿ	פֿ	ט	פ	פ	Ū	Ğ	Ŭ	פֿ	פֿ	פֿ	Ŭ	Ğ	ق	Ŭ	Ğ	Ū	Ū	פֿ	Ğ	Ğ	Ğ	Ğ	Ğ	Ŭ	ŭ
													•																				
														•																			
															•																		
											•	•																					
		•			•																												
		_					•	•																									
						•																											
			•	•																													
																										•							
																															•		
									•	•																							
																								•	•								•
																						•	•				•	•	•	•		•	
																•			•														
																	•	•		•													
																					•												
																								•	•								•
																						•						•		•			
																																•	
						•																											
•	•																																

Article description Art. no. **EAN** 006825 605150 34.055.75 4006825605150 Grass box DIVERSE Grass box 34.055.76 4006825608359 4006825544152 Spare aerator roller 34.055.70 **SCARIFIERS / AERATORS** Spare aerator roller 34.055.71 4006825608601 Spare aerator roller 34.211.09 4006825552942 CUTTER / AERATOR ROLLERS Spare aerator roller 34.211.25 4006825575156 34.211.35 4006825606331 Spare aerator roller 4006825544176 Spare cutter roller 34.055.80 Spare cutter roller 34.055.81 4006825608366 4006825603309 Spare cutter roller 34.200.21 34.211.08 4006825549201 Spare cutter roller Spare cutter roller 34.211.20 4006825575149 4 006825 606324 4006825606324 Spare cutter roller 34.211.30 4006825545579 Line spool 34.050.60 4006825546019 Line spool 34.050.86 **LAWN TRIMMERS / SCYTHES LINE SPOOLS** 4006825558975 Line spool 34.052.20 Line spool 34.052.40 4006825598643 34.056.85 4006825610680 Line spool 006835 500337 Line spool 34.056.90 4006825599237 34.056.95 4006825599213 Line spool 34.057.30 4006825560404 Spare blades set (for lawn trimmers) **BLADES** Spare blades (for scythes) 34.049.96 4006825607239 Spare blades (for scythes) 34.050.81 4006825546026 006825 508636 Spare blades (for scythes) 34.052.30 4006825598636 **POLE MOUNTED PRUNERS** 34.107.03 4006825583120 Spare battery Spare chain 45.001.21 4006825569117 **CHAINS** 45.001.23 4006825580037 Spare chain 4006825606355 Spare chain 45.001.88 006825 560100 Spare bar 45.001.17 4006825569100 **BLADES** Spare bar 45.001.18 4006825580044 4 006825 606348 Spare bar 45.001.68 4006825606348

Control Cont	Sca	rifie	rs / a	aera	tors				Lav	Lawn trimmers / scythes Pole mounted pruners / Multitools														S									
	- Solo						<u>ا</u>	۵		-Solo				Set				AS		10	S	S	S	S	_	T-Sol	_	T - Sok	 -		- K <u>i</u> t		·Kit
	35 Li	1231	11231	1433	,1435	1640	. 2240	,1335	.18Li	18 Li	3023	4025	4526	4530	4526	5027	7535	72538	33 AS	. 43 AS	2 25 A	30 A	33-4	2 43 A	. 18 Li	. 18 Li	18 Li	18 Li	1815	7501	7501	.720T	720T
	GE-SC	GC-ES	GC-SA	RG-SA	GE-SA	GE-SA	GC-SC	GE-SA	GE-CT	GE-CT	GC-ET	GC-ET	GC-ET	GC-ET	GE-ET	GE-ET	RG-ET	GH-PT	GE-BC	GE-BC	GH-BC	GH-BC	GH-BC	GH-BC	GE-HC	GE-HC	GE-LC	GE-LC	OC-FC	GC-EC	GC-EC	GE-EC	GE-EC
	•																																
		•																															
	•																																
				•																													
					•			•																									
						•																											
		•	•																														
	•																																
				•																													
					•			•																									
						•																											
																					•	•	•	•									
																		•															
																			•	•													
														•																			
												•	•		•	•																	
											•																						
									•	•																							
																							•	•									
																					•	•											
																													•				
																																•	•
																													•				
																																•	•
																													•				
																									•	•	•	•		•	•		

CHAINSAWS / SAW CHAIN SHARPENERS


CHAINS

GRINDING DISKS

BARS

SHREDDERS

WATERING / DRAINING DIVERSE





Article description	Art. no.	EAN	
Spare chain	45.001.71	4006825548846	4 006825 548846
Spare chain	45.001.72	4006825600926	4 006825 600926
Spare chain	45.001.78	4006825610321	
Spare chain	45.003.20	4006825578126	4 006825 578126
Spare chain	45.017.54	4006825607024	4 006825 607024
Spare chain	NEW	NEW	
Spare chain	NEW	NEW	
Spare bar	45.001.51	4006825548907	4 006825 548907
Spare bar	45.001.62	4006825610314	4 006825 610314
Spare bar	45.003.32	4006825546637	4 006825 546637
Spare bar	45.003.44	4006825594188	4 006825 594188
Spare bar	45.017.53	4006825607017	4 006825 607017
Spare bar	NEW	NEW	
Spare bar	NEW	NEW	
Replacement 4.5 mm grinding wheel	45.000.71	4006825548853	4 006825 548853
Replacement 3.2 mm grinding wheel	45.000.76	4006825548860	4 006825 548860
Replacement 4.5 pro grinding wheel	45.999.80	4006825552874	4 006825 552874
Replacement 3.2 pro grinding wheel	45.999.90	4006825552881	4 006825 552881
Spare blade for shredders	34.059.30	4006825595680	4 006825 595680
Electronic flow switch	41.742.21	4006825549225	4 006825 549225
12 cm Prefilter with cartridge	41.738.01	4006825549188	4 006825 549188
12 cm Prefilter with cartridge	41.738.51	4006825549195	4 006825 549195
4 m Suction hose with brass connectors	41.736.30	4006825549133	4 006825 549133
4 m Suction hose with plastic connectors	41.736.35	4006825549058	4 006825 549058





7 m Suction hose with brass connectors

7 m Suction hose with plastic connectors





41.736.40

41.736.45

FIREWOOD SAWING TRESTLE

4006825549171

4006825549102

44.999.80 Art. no.



006825 549102

FOREST SAFETY HELMET

45.004.80 Art. no.



	Cha Sav	Chainsaws / Saw chain sharpeners															Wa	terin	g an	d dr	ainin	ng					
	GC-LC 18 Li	GE-LC 18 Li	GE-LC 18 Li - Solo	GH-EC 1835	GH-EC 2040	GE-EC 2240	GE-EC 2240 S	GC-PC 12351	GC-PC 1535 I TC	GC-PC 2040 I	GC-PC 930 I	GE-CS 18 Li - Solo	GC-CS 85 E	GC-CS 85 F	GC-CS 235 E	GH-KS 2440	GC-GP 6538	GE-GP 5537 E	GE-GP 9041 E	GC-AW 6533	GC-AW 9036	GC-AW 1136	GE-AW 5537 E	GE-AW 9041 E	GC-WW 6538	GE-WW 5537 E	GE-WW 9041 E
 				•																							
									•																		
											•																
					•	•	•																				
	•	•	•																								
								•																			
-									•	•																	
											•																
					•	•	•																				
				•																							
	•	•	•																								
-								•																			
										•		•	•	•													
												•	•	•													
															•												
															•												
																•											
																	•	•	•								
																	•								•		
																	•								•		
																	•	•	•				•	•	•	•	•
																	•	•	•	•	•	•	•	•	•	•	•
																	•	•	•	•	•	•	•	•	•	•	•



POS SYSTEMS + SALES SUPPORT

Get ahead with Einhell point-of-sale solutions.

Shop-in-shop systems





Shop-in-shop - 360 x 240 cm (on request) Shop-in-shop - 240 x 130 cm (on request)

Print products



Catalogue



Flyers / folders



Brochures



Permanent secondary displays







- Wall display Euro pallet 120 x 80 cm (Art. no. 720070)
- Wall display Special pallet 120 x 50 cm (Art. no. 720075)
- Free-standing display Euro pallet 120 x 80 cm (Art. no. 720080)









- Free-standing display 2 -Euro pallet 120 x 80 cm (on request)
- Modular display "BOAH HAMMA" Half-pallet 80 x 60 cm
 (Art. no. 720090)
- Modular display "Power X-Change" Half-pallet 80 x 60 cm
 (Art. no. 720085)
- Modular display "BOAH HAMMA" Quarter-pallet 60 x 40 cm
 (Art. no. 720095)





We're always here to help — and that's a promise.

Is there anything you'd like to ask us about our products?

Would you like to order a part?

Your product isn't working as it should?

We're at your service!
We'll get you some help – fast and without any fuss.



iSC GmbH, Eschenstr. 6, 94405 Landau/Isar, Germany



+49 (0) 9951 959 2000



(Landline charge 14 cents/min.) (Cell phone charge 42 cents/min.)

+49 (0) 1805 835 830



isc-gmbh.info



info@isc-gmbh.info

Einhell Germany AG Wiesenweg 22 94405 Landau/Isar Germany

www.einhell.com info@einhell.com

© 2016 Einhell Germany AG

Subject to technical modifications and errors.

Item no. 520124 As of 04.2016

Einhell