




# ONE FOR ALL.

The clever battery for workshop and garden.

Einhell Germany AG

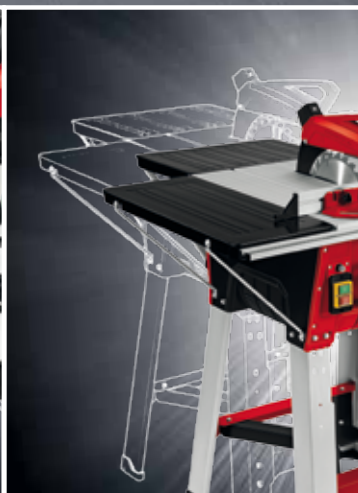

## TOOLS

| Power Tools |  
| Stationary Tools |

2016/2017

**Einhell** WELL DONE.

# Einhell. Well done.

Based in Landau an der Isar in southern Germany, Einhell Germany AG is one of the world's leading suppliers of in-house developed and distributed solutions for DIY enthusiasts and trade professionals for use in the home, garden and for leisure purposes. For more than 50 years and in more than 40 countries, Einhell has provided professional expertise in its partnerships with retailers for the supply of hand-held power tools, stationary tools and machines including garden equipment and water technology.

With its tagline **"Einhell® WELL DONE"**, Einhell can increasingly claim to be blazing a trail in the development of innovative new products and technologies that impress customers with their outstanding value for money.

As a company, Einhell focuses on generating sustainable international growth as well as reinforcing its position in the market by supplying **„Brand Quality at the Best Price“**



## Einhell. Brand quality and service.

- Our new multi-stage quality assurance system covers everything without exception: from audits of our production facilities around the world to our complete service for the end user.
- The Einhell RED Service covering the D/A/CH markets provides fast, all-round expert assistance and comes with a 10-year parts availability guarantee.





## POWER TOOLS

### Power X-Change



4

|   |    |
|---|----|
| The battery system                              | 4  |
| Cordless drill                                  | 8  |
| Cordless impact drill                           | 10 |
| Cordless impact driver                          | 12 |
| Cordless rotary hammer                          | 13 |
| Cordless all-purpose saw                        | 14 |
| Cordless hand-held circular saw                 | 15 |
| Cordless pendulum jigsaw                        | 15 |
| Cordless angle grinder                          | 16 |
| Cordless multi sander                           | 17 |
| Cordless lights                                 | 18 |
| Cordless radio                                  | 19 |
| USB power bank                                  | 19 |
| Power X-Change accessories (batteries, charger) | 20 |

### Screwing



22

|                                 |    |
|---------------------------------|----|
| Cordless Screwdriver (Li-Ion)   | 22 |
| Cordless drill (Li-Ion)         | 24 |
| Cordless impact drill (Li-Ion)  | 32 |
| Cordless impact driver (Li-Ion) | 34 |
| Cordless drill (NiCd)           | 36 |
| Cordless impact drill (NiCd)    | 39 |
| Drywall screw gun               | 40 |

### Drilling & mixing



41

|                        |    |
|------------------------|----|
| Impact drill           | 42 |
| Cordless rotary hammer | 48 |
| Rotary hammer          | 49 |
| Demolition hammer      | 53 |
| Paint and mortar mixer | 54 |

### Cutting



56

|                        |    |
|------------------------|----|
| Cordless angle grinder | 57 |
| Angle grinder          | 58 |

### Milling & Planing



64

|                        |    |
|------------------------|----|
| Masonry channel cutter | 65 |
| Biscuit jointer        | 65 |
| Router                 | 66 |
| Electric planer        | 67 |

### Sawing



68

|                                 |    |
|---------------------------------|----|
| Cordless pendulum jigsaw        | 69 |
| Jigsaw                          | 70 |
| Cordless all-purpose saw        | 72 |
| All-purpose saw                 | 73 |
| Cordless hand-held circular saw | 74 |
| Mini hand-held circular saw     | 75 |
| Hand-held circular saw          | 76 |

### Grinding



79

|                             |    |
|-----------------------------|----|
| Multimaxx cordless          | 80 |
| Multimaxx                   | 82 |
| Grinding and engraving tool | 83 |
| Delta sander                | 84 |
| Cordless multi sander       | 85 |
| Multi sander                | 85 |
| Orbital sander              | 88 |
| Eccentric sander            | 90 |
| Belt sander                 | 91 |
| Drywall power sander        | 92 |

### More power tools



93

|                  |    |
|------------------|----|
| Cordless tackler | 93 |
| Hot air gun      | 94 |

## STATIONARY TOOLS

### Woodworking



96

|                                   |     |
|-----------------------------------|-----|
| Crosscut and mitre saw with table | 98  |
| Mitre saw                         | 100 |
| Drag, crosscut and mitre saw      | 102 |
| Table saw                         | 104 |
| Slide                             | 109 |
| Stationary planer                 | 110 |
| Band saw                          | 111 |
| Scroll saw                        | 111 |
| Stationary belt grinder           | 112 |
| Stationary belt-disc grinder      | 113 |
| Woodworking lathe                 | 113 |
| Woodworking accessories           | 114 |

### Cleaning systems



117

|                                   |     |
|-----------------------------------|-----|
| Ash vacuum cleaner                | 118 |
| Wet and dry vacuum cleaner        | 119 |
| Vacuum cleaner accessories        | 125 |
| High pressure cleaner             | 126 |
| High pressure cleaner accessories | 129 |

### Air tools



130

|                       |     |
|-----------------------|-----|
| Compressor            | 131 |
| Air tools accessories | 140 |

### Tile/stone cutting



145

|                       |     |
|-----------------------|-----|
| Tile cutting machine  | 146 |
| Stone cutting machine | 148 |

### Metalworking



150

|                             |     |
|-----------------------------|-----|
| Bench grinder               | 151 |
| Wet-dry grinder             | 153 |
| Upright belt grinder/sander | 154 |
| Metal cutting saw           | 154 |
| Metalworking accessories    | 155 |

### Point of sale systems

156

### Service

158

Einhell Germany AG recommends  
accessories from



www.kwb.eu

**POWER X CHANGE**®

**ONE FOR ALL.**

THE CLEVER BATTERY SYSTEM FOR WORKSHOP AND GARDEN.



■ German  
■ Designed  
■ Quality  
Einhell Germany AG

BOOSTED BY  
**TWIN PACK**®

2 x 18 V = 36 V SUPERPOWER



**BUY ONCE,  
SAVE FOR EVER.**



**FREEDOM  
FROM CABLES.**






# NOW THERE'S EVEN MORE.


## MORE APPLICATIONS.

The Power X-Change system includes batteries with a nominal charge of 1.5 Ah to 5.2 Ah - so there's always a battery for every application!

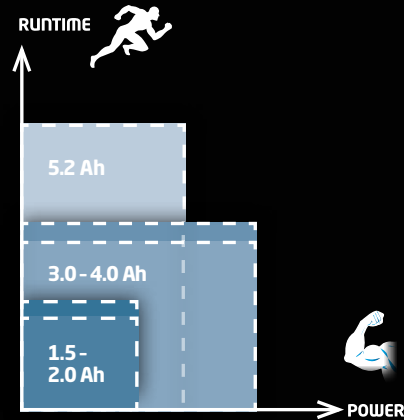

## SHORT CHARGING TIME.

Innovative battery technology – optimized charging – much shorter charging times. The 1.5 Ah battery, for example, is ready for use again after charging for just 30 minutes.



## MORE POWER.

**Twin-Pack technology for maximum power:**  
For extremely energy-intensive applications 2 rechargeable batteries are simply used in one machine – e.g. in the lawn mower.  
So the power comes from  $2 \times 18 \text{ V} = 36 \text{ V}$  – unique in the DIY sector.



## MORE SAFETY.

The Einhell ABS – Active Battery Management System – is setting the standard in terms of safety.  
The temperature, current and voltage are constantly monitored, not only of the battery as a whole but also of each individual battery cell.  
This is the maximum possible safety.



MONITORED BY

**ABS** Active Battery Management System

## POWER X-CHANGE.

PUTTING THE SYSTEM INTO BATTERY POWER.



**BUY 1 SET.**

Start your  
Power X-Change family!  
Buy one set consisting of

**Power tool**

**+ Battery**

**+ Charger**



**START SAVING  
RIGHT AWAY.**

Buy your next power  
and garden tools

**WITHOUT the  
battery and  
WITHOUT the  
charger.**

So you'll save with eve-  
ry new tool purchase.



**OR INDIVIDUALLY.**

The choice is yours:  
you can also buy each  
tool and each battery +  
charger individually.





 POWER X-CHANGE

**Amazing!  
One for all -  
all with one.**



**Florian Hertel**  
(Supply Chain Management,  
Einhell Germany AG)

Six months ago I started using the Power X-Change system developed by Einhell. Now I no longer have to spend time looking for the right battery for the tool I need – or for the right charger! ONE battery fits in ALL the tools. No hassle – and it saves time AND money!

Now work around the house and in the garden is more enjoyable and I can get on with the jobs more quickly.



CORDLESS DRILL

# TE-CD 18 Li Brushless

SOLO

**NEW!**



**POWER X CHANGE**



|                          |  |
|--------------------------|--|
| Battery pack             | Compatible with Power X-Change                         |
| Torque                   | 60 Nm  |
| Gears                    | 2-speed gearbox  |
| Speed                    | 0 - 500 min <sup>-1</sup> / 0 - 1800 min <sup>-1</sup> |
| Torque selector settings | 19 + 1   |
| Drill chuck              | 13 mm (single sleeve)                                  |
| Standard accessories     | Additional handle                                      |

Net weight | gross weight

1.1 kg | 1.3 kg

Packing dimensions

235 x 196 x 76 mm

Packaging unit

5

Article number

45.138.50

EAN code



CORDLESS DRILL

# TE-CD 18/2 Li

WITH 2ND BATTERY PACK

**NEW!**



**POWER X CHANGE**



|                          |   |
|--------------------------|---|
| Battery pack             | 18 V / 1500 mAh / Li-Ion  |
| Torque                   | 44 Nm   |
| Gears                    | 2-speed gearbox   |
| Speed                    | 0 - 350 min <sup>-1</sup> / 0 - 1250 min <sup>-1</sup>            |
| Torque selector settings | 20 + 1  |
| Drill chuck              | 10 mm (single-sleeve)   |
| Charging time            | 30 min  |
| Standard accessories     | 2nd battery pack, 30 min fast charger, transport and storage case |

Net weight | gross weight

1.4 kg | 4.0 kg

Packing dimensions

325 x 100 x 330 mm

Packaging unit

5

Article number

45.138.30

EAN code



High quality quick-change chuck made of metal



Brushless motor for longer operating times and more power



Single-sleeve quick-change chuck



2-speed metal gearbox



High-grade LED light



Safe grip thanks to additional handle



High-grade LED light



Slim and ergonomic design with soft grip



CORDLESS DRILL  
**TE-CD 18 Li**




**POWER X CHANGE**

CE

|                           |  |
|---------------------------|--|
| Battery pack              | 18 V / 1500 mAh / Li-Ion   |
| Torque                    | 48 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 – 320 min <sup>-1</sup> / 0 – 1350 min <sup>-1</sup>                 |
| Torque selector settings  | 23 + 1   |
| Drill chuck               | 10 mm (single sleeve)  |
| Charging time             | 30 min   |
| Standard accessories      | System battery 1.5 Ah, 30 min fast charger, transport and storage case |
| Net weight   gross weight | 1.5 kg   3.7 kg  |
| Packing dimensions        | 420 x 335 x 105 mm   |
| Packaging unit            | 4  |
| Article number            | 45.136.90  |
| EAN code                  |  |



30 min fast charger

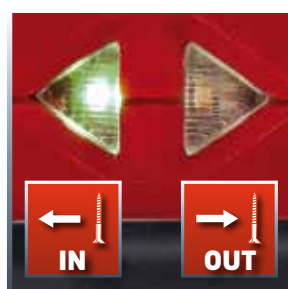

Direction indicator



Single-sleeve quick chuck



Battery technology with Einhell ABS



Einhell Germany AG



CORDLESS DRILL  
**TE-CD 18 Li**  
with 2nd system battery

Identical to TE-CD 18 Li,  
but with second system battery

Art. No. 45.136.87

PU 4

EAN code



CORDLESS DRILL  
**TE-CD 18 Li - Solo**

Identical to TE-CD 18 Li,  
but without system battery and  
fast charger

Art. No. 45.136.92

PU 8

EAN code





## BRUSHLESS MOTORS

**Brushless motors – the next generation power source for powerful DIY tools**

### Product development with a punch

Brushless motors are more effective than brushed electric motors and therefore perform better - that's why this new development really packs a punch!

### Longer operating times

Brushless motors have up to 50 % more battery life per charge and therefore cause fewer interruptions to the work and make light work of lengthy jobs in the home and garden.

### Long service life

Since they are so highly effective, brushless motors do not heat up during use like other motors, keeping wear and tear to a minimum and guaranteeing a longer service life.

CORDLESS IMPACT DRILL

## TE-CD 18 Li-i Brushless

SOLO

**NEW!**




|                           |  |
|---------------------------|--|
| Battery pack              | Compatible with Power X-Change                           |
| Torque                    | 60 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 - 500 min <sup>-1</sup> / 0-1800 min <sup>-1</sup>     |
| Blow rate                 | 0 - 9350 min <sup>-1</sup> / 0 - 31500 min <sup>-1</sup> |
| Torque selector settings  | 19 + 1 + 1   |
| Drill chuck               | 13 mm (single sleeve)                                    |
| Standard accessories      | Additional handle  |
| Net weight   gross weight | 1.4 kg   1.7 kg  |
| Packing dimensions        | 250 x 200 x 74 mm  |
| Packaging unit            | 5  |
| Article number            | 45.138.60  |
| EAN code                  | 4 006825 612417  |



High quality quick-change chuck made of metal



Brushless motor for longer operating times and more power



Screw fixings, drilling, hammer drilling



Safe grip thanks to additional handle



CORDLESS IMPACT DRILL  
**TE-CD 18-2 Li-i**



Einhell Germany AG

**POWER X CHANGE**



|                           |   |
|---------------------------|---|
| Battery pack              | 18 V / 1500 mAh / Li-Ion  |
| Torque                    | 48 Nm   |
| Gears                     | 2-speed gearbox   |
| Speed                     | 0 – 320 min <sup>-1</sup> / 0 – 1350 min <sup>-1</sup>  |
| Blow rate                 | 0 - 5120 min <sup>-1</sup> / 0 - 21600 min <sup>-1</sup>  |
| Torque selector settings  | 23 + 1 + 1  |
| Drill chuck               | 13 mm (single sleeve)   |
| Charging time             | 30 min  |
| Standard accessories      | System battery 1.5 Ah, 30 min fast charger, additional handle, metal depth stop, transport and storage case |
| Net weight   gross weight | 1.8 kg   4.0 kg   |
| Packing dimensions        | 420 x 335 x 105 mm  |
| Packaging unit            | 4   |
| Article number            | 45.138.00   |
| EAN code                  |   |



Screw fixings, drilling, hammer drilling



Large 13 mm quick-change chuck



Handy belt clip



Battery technology with Einhell ABS

CORDLESS IMPACT DRILL  
**TE-CD 18-2 Li-i - Solo**  
Identical to TE-CD 18-2 Li-i,  
but without system battery and fast  
charger



Art. No. 45.138.02

PU 8

EAN code



CORDLESS IMPACT DRIVER

## TE-CI 18 Li

**POWER X CHANGE**

**FAMILY**



BOOSTED BY  
**TWIN PACK®**  
2 x 18 V = 36 V SUPERPOWER



DE: rating "Very good"



**POWER X CHANGE**

**Battery pack** 18 V / 1500 mAh / Li-Ion

**Speed** 0 – 2300 min<sup>-1</sup>

**Torque** 140 Nm

**Charging time** 30 min

**Gears** 1-speed gearbox

**Hexagon fitting** 6.35 mm (1/4")

**Standard accessories** System battery 1.5 Ah, 30 min fast charger, transport and storage case

**Net weight | gross weight** 1.4 kg | 3.4 kg

**Packing dimensions** 330 x 110 x 308 mm

**Packaging unit** 5

**Article number** 45.100.20

**EAN code**



CORDLESS IMPACT DRIVER

### TE-CI 18 Li

Item identical to TE-CI 18 Li,  
but with 3.0 Ah system battery



Art. No. 45.100.21

PU 5

EAN code



CORDLESS IMPACT DRIVER

### TE-CI 18 Li - Solo

Item identical to TE-CI 18 Li,  
but without system battery  
and fast charger



Art. No. 45.100.23

PU 10

EAN code



**TRIATHLON  
MOTOR**

The unrivaled Triathlon motor – power,  
speed and endurance



Special mechanism to reduce impact  
on the joints from screwing action



High-quality, robust design



Short, ergonomic design with soft grip



CORDLESS ROTARY HAMMER

## TE-HD 18 Li

**NEW!**



**POWER X CHANGE**

CE

|                            |  |
|----------------------------|--|
| Battery pack               | 18 V / 1500 mAh / Li-Ion   |
| Speed                      | 0 – 1100 min <sup>-1</sup>   |
| Blow rate/strength         | 0 – 5700 min <sup>-1</sup> / 1.0 J   |
| Drilling capacity concrete | 12 mm  |
| Drill chuck                | SDS-plus tool holder   |
| Standard accessories       | System battery 1.5 Ah, 30 min fast charger, bit holder, transport and storage case |
| Net weight   gross weight  | 1.5 kg   4.3 kg  |
| Packing dimensions         | 110 x 330 x 410 mm   |
| Packaging unit             | 4  |
| Article number             | 45.138.10  |
| EAN code                   |  |



SDS-plus tool holder



Robust metal gearbox



Simple speed setting control



LED-light



Einhell Germany AG

CORDLESS ROTARY HAMMER

### TE-HD 18 Li - Solo

Item identical to TE-HD 18 Li, but without system battery and fast charger

**NEW!**



Art. No. 45.138.12

PU 8

EAN code



4 006825 604054



## TRIATHLON MOTOR – HIGH-QUALITY MOTOR FOR EXCEL- LENT SCREW FITTING RESULTS



### Power

Much more torque provided by 4-pole motor (2 magnets) instead of 2-pole motor with no increase in size – so it is small and handy yet still powerful!



### Speed

Improved power transmission resulting in low speed loss under load. This means more torque and faster progress with jobs!



### Endurance

The Triathlon motor is more efficient than standard motors and therefore boasts lower energy consumption and less wear. This means a longer battery life and therefore more screws fitted with every battery charge!

CORDLESS ALL-PURPOSE SAW

# TE-AP 18 Li

SOLO



**POWER X CHANGE**

CE


|                            |                                |
|----------------------------|--------------------------------|
| Battery pack               | Compatible with Power X-Change |
| Blade speed                | 0 – 2600 min <sup>-1</sup>     |
| Cutting depth (wood/steel) | 100 / 6 mm                     |
| Pendulum action            | –                              |
| Stroke height              | 22 mm                          |
| Saw blade thickness        | 0.6 - 1.6 mm                   |
| Standard accessories       | 1 saw blade (wood)             |
| Net weight   gross weight  | 1.7 kg   2.0 kg                |
| Packing dimensions         | 410 x 80 x 160 mm              |
| Packaging unit             | 6                              |
| Article number             | 43.263.00                      |
| EAN code                   | 4 006825 601381                |



For universal use in gardens, workshops  
and on building sites



The unrivaled Triathlon motor – power,  
speed and endurance



No tools required to change saw blade and  
adjust soleplate



# CORDLESS HAND-HELD CIRCULAR SAW

# CORDLESS PENDULUM JIGSAW

**NEW!**

## TE-CS 18 Li

SOLO



**POWER X CHANGE**



|                      |  |
|----------------------|--|
| Battery pack         | Compatible with Power X-Change                 |
| Idling speed         | 4200 min <sup>-1</sup>                         |
| Saw blade            | 150 x 10 mm                                    |
| Number of teeth      | 24   |
| Cutting depth 90°    | 48 mm  |
| Cutting depth 45°    | 32 mm  |
| Standard accessories | Parallel guide, key for changing the saw blade |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | n/a                |
| Packing dimensions        | 570 x 345 x 225 mm |
| Packaging unit            | 2                  |

Article number 43.312.00

EAN code



## TE-JS 18 Li

SOLO



DE: rating "Very good"



**POWER X CHANGE**

|                                    |  |
|------------------------------------|--|
| Battery pack                       | Compatible with Power X-Change   |
| Bevel cuts, max.                   | 47°  |
| Blade speed                        | 0 – 2400 min <sup>-1</sup>   |
| Cutting depth (wood/plastic/steel) | 80 / 12 / 10 mm  |
| Pendulum action                    | 4 levels (3 + 0)   |
| Stroke height                      | 25 mm  |
| Standard accessories               | Parallel guide, attachable cutting line guide, dust extraction adapter, chip guard |

|                           |                   |
|---------------------------|-------------------|
| Net weight   gross weight | 1.8 kg   2.3 kg   |
| Packing dimensions        | 238 x 90 x 227 mm |
| Packaging unit            | 5                 |

Article number 43.212.00

EAN code



Simple, tool-free adjustment of cut depth and angle



High-grade LED light



Special stroke makes exact or particularly fast cuts possible



Universal saw blade holder / tool-free saw blade change



Compact, handy and ergonomic design



Compatible with Einhell guide rail system



Perfect view of the workpiece: Dust blow-off function and LED lamp



Plastic insert greatly reduces splintering on the workpiece surface

# CORDLESS ANGLE GRINDER

## TE-AG 18 Li

**NEW!**



**POWER X CHANGE**



DE: rating "Very good"



|                           |   |
|---------------------------|---|
| Battery pack              | 18 V / 3000 mAh / Li-Ion  |
| Speed                     | 8500 min <sup>-1</sup>  |
| Disc diameter             | 115 mm  |
| Standard accessories      | Key (storage compartment in additional handle), system battery, charger, transport and storage case |
|                           | Cutting disc not included   |
| Net weight   gross weight | 2.3 kg   3.2 kg   |
| Packing dimensions        | 315 x 145 x 145 mm  |
| Packaging unit            | n/a   |
| Article number            | 44.311.13   |
| EAN code                  | 4 006825 610345   |



Extensive safety package: restart safeguard, softstart function and overload cut-out



Slimline design for comfortable and ergonomic operation



Greatly reduced vibrations thanks to separation of motor and gearing.



Lightest angle grinder in its class

### CORDLESS ANGLE GRINDER

#### TE-AG 18 Li - Solo

Item identical to TE-AG 18 Li, but without system battery and fast charger



Art. No. 44.311.10

PU 6

EAN code



4 006825 602593



CORDLESS MULTI SANDER

# TE-OS 18 Li

SOLO



|                           |   |
|---------------------------|---|
| Battery pack              | Compatible with Power X-Change                                |
| Vibrations                | 24000 min <sup>-1</sup>                                       |
| Oscillating circuit       | 1.6 mm  |
| Sanding area              | 104 cm <sup>2</sup>   |
| Abrasive paper size       | 150 x 150 x 100 mm  |
| Standard accessories      | 6 abrasive paper (3x 120 K, 3x 240 K), dust extractor adapter |
| Net weight   gross weight | 0.8 kg   1.1 kg   |
| Packing dimensions        | 240 x 110 x 144 mm  |
| Packaging unit            | 8   |
| Article number            | 44.607.10   |
| EAN code                  |   |



With "Extreme Fix" Velcro fastening for quick and secure fastening of abrasive paper



Soft grip molded to the palm of the hand



Efficient dust extractor and filter box for added cleanliness



Robust solid metal impeller for smooth and quiet action



Einhell Germany AG



FAMILY



BOOSTED BY  
**TWIN PACK®**  
2 x 18 V = 36 V SUPERPOWER

CORDLESS LIGHT  
**TE-CL 18 Li**  
SOLO



|                           |  |
|---------------------------|--|
| Battery pack              | Compatible with Power X-Change                 |
| Light source              | 3 high-performance LEDs                        |
| Luminosity                | 270 Lumen                                      |
| Burn time                 | 8 h (1.5 Ah)<br>16 h (3.0 Ah)<br>32 h (5.2 Ah) |
| Net weight   gross weight | 0.17 kg   0.21 kg                              |
| Packing dimensions        | 90 x 50 x 180 mm                               |
| Packaging unit            | 60   |
| Article number            | 45.141.10                                      |
| EAN code                  |  |

CORDLESS LIGHT  
**TE-CL 18 Li H**  
SOLO

**NEW!**



|                           |  |
|---------------------------|--|
| Battery pack              | Compatible with Power X-Change                 |
| Light source              | LED of the company CREE Ltd.                   |
| Luminosity                | 280 Lumen                                      |
| Burn time                 | 7 h (1.5 Ah)<br>14 h (3.0 Ah)<br>30 h (5.2 Ah) |
| Net weight   gross weight | 0.2 kg   0.3 kg                                |
| Packing dimensions        | 80 x 75 x 243 mm                               |
| Packaging unit            | 8  |
| Article number            | 45.141.30                                      |
| EAN code                  |  |




Ultra-long burn time (up to 32 hrs)



Adjustable cone of light



High quality LED of the company CREE Ltd.

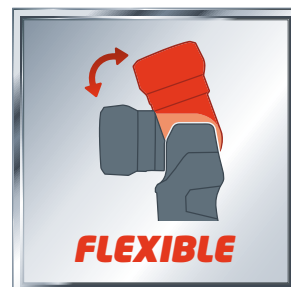

High flexibility thanks to a swiveling head



Variable angle adjustment



High luminosity



Practical metal hook



Optimum illumination thanks to the diffusion angle of up to 33 m



**NEW!**

# CORDLESS RADIO

## TE-CR 18 Li

SOLO



**POWER X CHANGE**



|                                     |                                |
|-------------------------------------|--------------------------------|
| Battery pack                        | Compatible with Power X-Change |
| Frequency AM                        | 522 – 1620                     |
| Frequency FM                        | 87.5 – 108                     |
| Storage space for 10 radio stations | 10/10 (FM/AM)                  |
| Standard accessories                | AUX in connector               |

|                           |                   |
|---------------------------|-------------------|
| Net weight   gross weight | 0.6 kg   0.8 kg   |
| Packing dimensions        | 140 x 95 x 220 mm |
| Packaging unit            | 4                 |

Article number 34.080.15

EAN code



10 storage spaces for radio stations



Practical rear side storage facility



Facility for mounting on the wall



AUX-in connector can be used to connect a mobile phone or an MP3 player

**NEW!**

# USB POWER BANK

## TE-CP 18 Li USB

SOLO



**POWER X CHANGE**



|                      |                                |
|----------------------|--------------------------------|
| Battery pack         | Compatible with Power X-Change |
| Rated voltage        | 18 V                           |
| Amount of USB ports  | 2                              |
| Output of USB port 1 | 1.0 A                          |
| Output of USB port 2 | 2.1 A                          |

|                           |                  |
|---------------------------|------------------|
| Net weight   gross weight | 0.1 kg   0.1 kg  |
| Packing dimensions        | 81 x 56 x 120 mm |
| Packaging unit            | 64               |

Article number 45.141.20

EAN code



Practical and mobile - external power source for charging battery-powered devices



2 USB ports for charging two devices simultaneously (incl. 1 port for fast charging)



Power source for charging other, smaller rechargeable batteries



Power source for charging a mobile phone, tablet, MP3 player, ...

**POWER X-CHANGE-STARTER-KIT**

Set comprising 1.5 Ah system battery and high-speed system charger 18 V (charging time 30 min)

Art. No. 45.120.21

PU 12

EAN code



4 006825 601350

**POWER X-CHANGE CHARGE**

fast charger 18 V,  
charging time 30 min

Art. No. 45.120.11

PU 8

EAN code



4 006825 587029

**POWER X-CHANGE**

system battery 18 V / 1.5 Ah

Art. No. 45.113.40

PU 24

EAN code



4 006825 590586

**POWER X-CHANGE**

system battery 18 V / 2.0 Ah

Art. No. 45.113.95

PU 24

EAN code

**NEW!**

4 006825 610369

**POWER X-CHANGE**

system battery 18 V / 3.0 Ah

Art. No. 45.113.41

PU 24

EAN code



4 006825 590593

**POWER X-CHANGE**

system battery 18 V / 4.0 Ah

Art. No. 45.113.96

PU 24

EAN code

**NEW!**

4 006825 610376

**POWER X-CHANGE**

system battery 18 V / 5.2 Ah

Art. No. 45.113.57

PU 12

EAN code



4 006825 598865


## THE NEW KWB ACCESSORIES FOR CORDLESS MACHINES AND MAINS-POWERED ELECTRICAL TOOLS.

### All the benefits at a glance:

- + Innovative design makes working easier
- + Saves time - so you can work for longer on one battery charge
- + Less strain on cordless tool
- + Sawdust removed quicker
- + More rapid sawing
- + Work more efficiently and save time

Work up to 30 % faster


Save up to 30 % energy

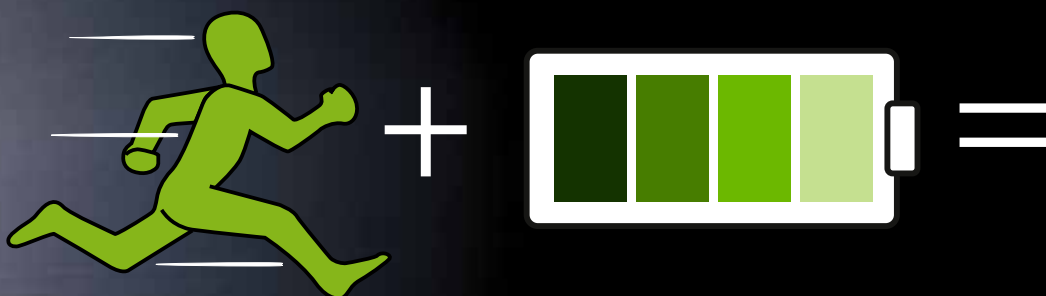

## SUITABLE FOR EINHELL POWER X-CHANGE TOOLS



FCE Hardwood Drill Bit with TwinLand® groove design.  
For bangkirai, hardwoods and softwoods



Reciprocating saw with patented sawblade geometry  
for plenty of additional cutting pressure - for use with  
hardwoods and softwoods, laminate, parquet, nonferrous  
metals and wood with metal residues



Saber saw with patented sawblade geometry for plenty  
of additional cutting pressure - for use with hardwoods  
and softwoods, framing timber, dry greenheart, nonferrous  
metals and wood with metal residues



AGGRESSO-FLEX® Diamond Cutting Disks  
Ultra-thin cutting edge, turbo-shaped, suitable for concrete,  
tiles, stoneware and artificial stone



Multi-blade hole sawing attachment with  
patented flutes, supplied with 8 or 7 blades,  
for wood, chipboard and plasterboard



DE: rating "Very good"



# SCREWING

We put the screws on the price. But it can drill too...

CORDLESS SCREWDRIVER

**TC-SD 3,6 Li**

**NEW!**



CE

|                           |                           |
|---------------------------|---------------------------|
| Battery pack              | 3.6 V / 1300 mAh / Li-Ion |
| Speed                     | 200 min <sup>-1</sup>     |
| Torque                    | 3 Nm                      |
| Charging time             | 3 – 5 h                   |
| Torque selector settings  | 19 + 1                    |
| Standard accessories      | 6 bits, charging cable    |
| Net weight   gross weight | 0.4 kg   0.9 kg           |
| Packing dimensions        | 246 x 60 x 225 mm         |
| Packaging unit            | 20                        |
| Article number            | 45.134.42                 |
| EAN code                  | 4 006825 604733           |



## Andreas Wieser

(Section Manager Product Tests/  
Sample Store, Einhell Germany AG)

With my new Einhell lithium-ion cordless screwdriver I am always prepared for any job in the house and garden. Virtually no self-discharge and no memory effect! It always works to full capacity and it is small, light and handy. It is a pleasure to work with! Incidentally: my son absolutely loved his new playhouse!



Turnable handle



Ergonomic softgrip



LED battery capacity indicator



incl. 6 bits

## CORDLESS SCREWDRIVER TE-SD 3,6 Li



DE: rating "Very good"



Identical in construction to  
the tested RT-SD 3,6/1 Li



## LITHIUM-ION TECHNOLOGY FROM EINHELL

### Ready for use at any time.

Rechargeable lithium-ion batteries are not afflicted by self-discharge. Nor do they suffer from memory effect. They can be charged without any problems at any time – even after a long period of disuse. Say goodbye to the days when a flat battery put paid to your project – always ready for action!

### Full power.

The lithium-ion system guarantees that the full capacity is always available – all (battery) life long!

### Small – light – handy.

Rechargeable lithium-ion batteries are much smaller and lighter than nickel-cadmium batteries of the same capacity. This makes light work of the various jobs – so you can work for hours without feeling the strain.

### Special protection – long life.

Special protective mechanisms (e.g. continuous monitoring of voltage and temperature) lengthen the service life of Einhell rechargeable lithium-ion batteries.

|                           |  |
|---------------------------|--|
| Battery pack              | 3.6 V / 1500 mAh / Li-Ion              |
| Speed                     | 200 min <sup>-1</sup>                  |
| Torque                    | 3.5 Nm                                 |
| Charging time             | 3 h                                    |
| Standard accessories      | 9 bits, charger station with bit depot |
| Net weight   gross weight | 0.4 kg   1.2 kg                        |
| Packing dimensions        | 245 x 190 x 90 mm                      |
| Packaging unit            | 10                                     |
| Article number            | 45.134.90                              |
| EAN code                  |  |



+ 30% capacity



Turnable handle



Torque selector settings



Charger station

## CORDLESS SCREWDRIVER TE-SD 3,6 Li KIT

Item identical to TE-SD 3,6 Li,  
but supplied in practical storage box  
and with 32-piece bit set



Art. No. 45.134.95

PU 18

EAN code





## AS CONFIRMED BY CONSUMER TESTING AGENCY TESTBERICHTE.DE: EINHELL IS A QUALITY BRAND

### Rated first class in Cordless Screwdriver category

In July 2015, the consumer portal testberichte.de named Einhell a "2015 Quality Brand" in the Cordless Screwdriver category.

testberichte.de's Quality Brand award is given to manufacturers who regularly achieve above-average scores in independent tests conducted by trade magazines. The award is proof of Einhell Germany's top class product portfolio and the outstanding product quality offered by the company.

testberichte.de is Germany's biggest independent online platform for professional consumer product testing and comparison; it does not test the products itself but lists test results from more than 650 German language test magazines.

## EINHELL. WELL DONE.

## CORDLESS DRILL TH-CD 12 Li



|                           |                           |
|---------------------------|---------------------------|
| Battery pack              | 12 V / 1300 mAh / Li-Ion  |
| Torque                    | 22 Nm                     |
| Gears                     | 1-speed gearbox           |
| Speed                     | 0 – 400 min <sup>-1</sup> |
| Torque selector settings  | 19 + 1                    |
| Drill chuck               | 10 mm                     |
| Charging time             | 3 – 5 h                   |
| Standard accessories      | Battery pack, charger     |
| Net weight   gross weight | 1.0 kg   1.5 kg           |
| Packing dimensions        | 198 x 67 x 193 mm         |
| Packaging unit            | 10                        |
| Article number            | 45.136.50                 |
| EAN code                  | 4 006825 592320           |



Magnetic bit/screw holder



Quick-change chuck



20-step torque selector



Ergonomic softgrip



CORDLESS DRILL  
**TH-CD 12-2 Li**



|                           |  |
|---------------------------|--|
| Battery pack              | 12 V / 1300 mAh / Li-Ion                               |
| Torque                    | 24 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 - 350 min <sup>-1</sup> / 0 - 1300 min <sup>-1</sup> |
| Torque selector settings  | 19 + 1   |
| Drill chuck               | 10 mm (single sleeve)                                  |
| Charging time             | 3-5 h  |
| Standard accessories      | Charger, transport and storage case                    |
| Net weight   gross weight | 1.0 kg   2.0 kg  |
| Packing dimensions        | 280 x 220 x 79 mm                                      |
| Packaging unit            | 5  |
| Article number            | 45.136.60  |
| EAN code                  |  |

CORDLESS DRILL  
**TC-CD 12 Li**



|                           |  |
|---------------------------|--|
| Battery pack              | 12 V / 1300 mAh / Li-Ion   |
| Torque                    | 20 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 – 300 min <sup>-1</sup> / 0 – 1050 min <sup>-1</sup>                             |
| Torque selector settings  | 17 + 1   |
| Drill chuck               | 10 mm (single sleeve), removable   |
| Charging time             | 1 h  |
| Standard accessories      | System battery, 1h fast charger, removable drill chuck, transport and storage case |
| Net weight   gross weight | 1.1 kg   2.1 kg  |
| Packing dimensions        | 283 x 243 x 85 mm  |
| Packaging unit            | 5  |
| Article number            | 45.132.06  |
| EAN code                  |  |



Drilling and screwing



Quick-change chuck



2-speed high-performance gearbox



Single-sleeve drill chuck with spindle lock



20-step torque selector



Ergonomic softgrip



Removable chuck to shorten the tool and reduce weight



Ergonomic softgrip

# CORDLESS DRILL

## TE-CD 12 Li

WITH 2ND BATTERY PACK



DE: "Best tool"



DE: rating "Good"



|                           |  |
|---------------------------|--|
| Battery pack              | 12 V / 1300 mAh / Li-Ion                                       |
| Torque                    | 25 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 – 350 min <sup>-1</sup> / 0 – 1300 min <sup>-1</sup>         |
| Torque selector settings  | 17 + 1   |
| Drill chuck               | 10 mm (single-sleeve)  |
| Charging time             | 1 h  |
| Standard accessories      | 2nd battery pack, 1 h fast charger, transport and storage case |
| Net weight   gross weight | 1.0 kg   2.4 kg  |
| Packing dimensions        | 330 x 265 x 95 mm  |
| Packaging unit            | 5  |
| Article number            | 45.136.02  |
| EAN code                  |  |

# CORDLESS DRILL

## TE-CD 12 X-Li

WITH 2ND BATTERY PACK



DE: price/performance "Good – Very good"




|                           |  |
|---------------------------|--|
| Battery pack              | 12 V / 1300 mAh / Li-Ion   |
| Torque                    | 25 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 – 350 min <sup>-1</sup> / 0 – 1300 min <sup>-1</sup>   |
| Torque selector settings  | 17 + 1   |
| Drill chuck               | 10 mm (single-sleeve), removable   |
| Charging time             | 1 h  |
| Standard accessories      | 2nd battery pack, 1 h fast charger, 10 Bits, removable drill chuck, transport and storage case |
| Net weight   gross weight | 1.0 kg   2.7 kg  |
| Packing dimensions        | 330 x 265 x 95 mm  |
| Packaging unit            | 5  |
| Article number            | 45.136.03  |
| EAN code                  |  |



2-speed high-performance gearbox



Single-sleeve drill chuck with spindle lock




Small and easy to use with removable chuck



2-speed high-performance gearbox




Short, ergonomic design



1 h fast charger with Einhell ABS



Single-sleeve drill chuck with quick stop

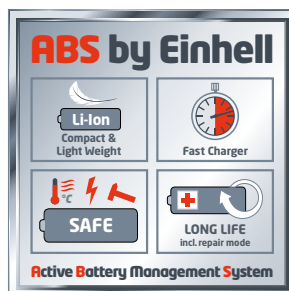

1 h fast charger with Einhell ABS

# CORDLESS DRILL

## TH-CD 14,4-2 2B Li

WITH 2ND BATTERY PACK



|                           |  |
|---------------------------|--|
| Battery pack              | 14.4 V / 1300 mAh / Li-Ion                             |
| Torque                    | 33 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 – 350 min <sup>-1</sup> / 0 – 1150 min <sup>-1</sup> |
| Torque selector settings  | 19 + 1   |
| Drill chuck               | 10 mm (single-sleeve)                                  |
| Charging time             | 3 – 5 h  |
| Standard accessories      | 2nd battery pack, charger, transport and storage case  |
| Net weight   gross weight | 1.4 kg   3.1 kg  |
| Packing dimensions        | 305 x 295 x 105 mm                                     |
| Packaging unit            | 5  |
| Article number            | 45.136.71  |
| EAN code                  | 4 006825 592511  |



2-speed gear: for drilling and screw fixings



AUTO LOCK & QUICK STOP

Easy tool-change



Ergonomic softgrip



Robust metal gearbox



Einhell Germany AG

CORDLESS DRILL

### TE-CD 12 Li

Item identical to 45.136.02, but without 2nd system battery



Art. No. 45.136.00

PU 5

EAN code



4 006825 586466

CORDLESS DRILL

### TH-CD 14,4-2 Li

Item identical to 45.136.71, but without 2nd system battery



Art. No. 45.136.70

PU 5

EAN code



4 006825 592504

### BIT-SET

23 pieces



Art. No. 42.580.73

PU 72

EAN code



4 006825 573268

### DRILL AND BIT KIT

70 pieces



Art. No. 42.580.85

PU 10

EAN code



4 006825 563610



# CORDLESS DRILL

## TE-CD 14,4-2 Li 2B

WITH 2ND BATTERY PACK



DE: price/performance  
"very good"

Identical in construction to  
the tested RT-CD 14,4/1 Li

DE: rating "Good"

Identical in construction to  
the tested RT-CD 14,4/1 Li



|                           |   |
|---------------------------|---|
| Battery pack              | 14.4 V / 1300 mAh / Li-Ion                                    |
| Torque                    | 38 Nm   |
| Gears                     | 2-speed gearbox   |
| Speed                     | 0 – 310 min <sup>-1</sup> / 0 – 1300 min <sup>-1</sup>        |
| Torque selector settings  | 23 + 1  |
| Drill chuck               | 10 mm (single-sleeve)   |
| Charging time             | 1 h   |
| Standard accessories      | 2nd battery pack, 1h fast charger, transport and storage case |
| Net weight   gross weight | 1.4 kg   4.2 kg   |
| Packing dimensions        | 380 x 110 x 340 mm  |
| Packaging unit            | 4   |
| Article number            | 45.132.98   |
| EAN code                  | 4 006825 577631   |


# CORDLESS DRILL

## TC-CD 18-2 Li

WITH 2ND BATTERY PACK



|                           |  |
|---------------------------|--|
| Battery pack              | 18 V / 1300 mAh / Li-Ion                               |
| Torque                    | 38 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 – 350 min <sup>-1</sup> / 0 – 1250 min <sup>-1</sup> |
| Torque selector settings  | 18 + 1   |
| Drill chuck               | 10 mm (single-sleeve)                                  |
| Charging time             | 3 – 5 h  |
| Standard accessories      | 2nd battery pack, charger, transport and storage case  |
| Net weight   gross weight | 1.4 kg   3.0 kg  |
| Packing dimensions        | 300 x 95 x 290 mm                                      |
| Packaging unit            | 5  |
| Article number            | 45.138.20  |
| EAN code                  | 4 006825 607000  |

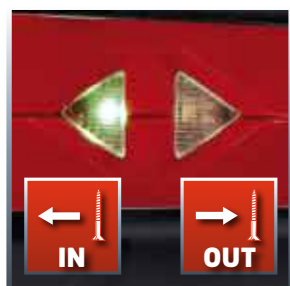

Direction indicator



LED battery capacity indicator



Sturdy 2-speed gearbox: for drilling and screwdriving



Easy tool-change




90° stop faces



1h fast charger with Einhell ABS



LED battery indicator

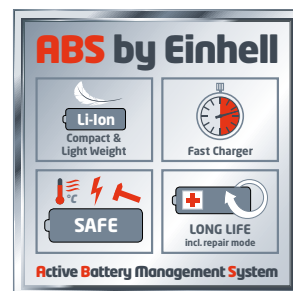

Battery technology with Einhell ABS

CORDLESS DRILL

# TE-CD 18 Li Brushless

SOLO

**NEW!**



**POWER X CHANGE**



**Battery pack** Compatible with Power X-Change

**Torque** 60 Nm

**Gears** 2-speed gearbox

**Speed** 0 - 500 min<sup>-1</sup> / 0 - 1800 min<sup>-1</sup>

**Torque selector settings** 19 + 1

**Drill chuck** 13 mm (single sleeve)

**Standard accessories** Additional handle

**Net weight | gross weight** 1.1 kg | 1.3 kg

**Packing dimensions** 235 x 196 x 76 mm

**Packaging unit** 5

**Article number** 45.138.50

**EAN code**



High quality quick-change chuck made of metal



Brushless motor for longer operating times and more power



High-grade LED light



Safe grip thanks to additional handle



## BRUSHLESS MOTORS

**Brushless motors – the next generation power source for powerful DIY tools**

### Product development with a punch

Brushless motors are more effective than brushed electric motors and therefore perform better - that's why this new development really packs a punch!

### Longer operating times

Brushless motors have up to 50 % more battery life per charge and therefore cause fewer interruptions to the work and make light work of lengthy jobs in the home and garden.

### Long service life

Since they are so highly effective, brushless motors do not heat up during use like other motors, keeping wear and tear to a minimum and guaranteeing a longer service life.

## CORDLESS DRILL RT-CD 14,4/1 Li

Item identical to 45.132.98, but without 2nd system battery



**Art. No.** 45.132.95

**PU** 4

**EAN code**



## BIT-SET

23 pieces



**Art. No.** 42.580.73

**PU** 72

**EAN code**



## DRILL AND BIT KIT

70 pieces



**Art. No.** 42.580.85

**PU** 10

**EAN code**



CORDLESS DRILL  
**TE-CD 18 Li**



|                           |  |
|---------------------------|--|
| Battery pack              | 18 V / 1500 mAh / Li-Ion   |
| Torque                    | 48 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 – 320 min <sup>-1</sup> / 0 – 1350 min <sup>-1</sup>                 |
| Torque selector settings  | 23 + 1   |
| Drill chuck               | 10 mm (single sleeve)  |
| Charging time             | 30 min   |
| Standard accessories      | System battery 1.5 Ah, 30 min fast charger, transport and storage case |
| Net weight   gross weight | 1.5 kg   3.7 kg  |
| Packing dimensions        | 420 x 335 x 105 mm   |
| Packaging unit            | 4  |
| Article number            | 45.136.90  |
| EAN code                  |  |

CORDLESS DRILL  
**TE-CD 18 Li**  
with second system battery  
Item identical to TE-CD 18 Li,  
but with second system battery

Art. No. 45.136.87  
PU 8  
EAN code

**30 min**  
**HIGH SPEED**  
**CHARGER**

30 min fast charger

**IN** **OUT**

Direction indicator

CORDLESS DRILL  
**TE-CD 18 Li - Solo**  
Item identical to TE-CD 18 Li,  
but without system battery  
and fast charger

Art. No. 45.136.92  
PU 8  
EAN code

Single-sleeve quick-change chuck

**ABS by Einhell**

Li-Ion  
Compact &  
Light Weight

Fast Charger

SAFE

LONG LIFE  
incl. repair mode

Active Battery Management System

Battery technology with Einhell ABS



**NEW!**

# CORDLESS DRILL

## TE-CD 18/2 Li

WITH 2ND BATTERY PACK



**POWER X CHANGE**



|                          |   |
|--------------------------|---|
| Battery pack             | 18 V / 1500 mAh / Li-Ion  |
| Torque                   | 44 Nm   |
| Gears                    | 2-speed gearbox   |
| Speed                    | 0 – 350 min <sup>-1</sup> / 0 – 1250 min <sup>-1</sup>            |
| Torque selector settings | 20 + 1  |
| Drill chuck              | 10 mm (single-sleeve)   |
| Charging time            | 30 min  |
| Standard accessories     | 2nd battery pack, 30 min fast charger, transport and storage case |

Net weight | gross weight 1.4 kg | 4.0 kg

Packing dimensions 325 x 100 x 330 mm

Packaging unit 5

Article number 45.138.30

EAN code



4 006825 607321



Einhell Germany AG

**POWER X CHANGE**

**FAMILY**



BOOSTED BY  
**TWIN PACK®**  
2 x 18 V = 36 V SUPERPOWER



Single-sleeve quick-change chuck



2-speed metal gearbox



High-grade LED light



Slim and ergonomic design with soft grip

CORDLESS IMPACT DRILL

## TC-CD 18-2 Li-i

**NEW!**



|                           |   |
|---------------------------|---|
| Battery pack              | 18 V / 1500 mAh / Li-Ion                              |
| Torque                    | 40 Nm   |
| Gears                     | 2-speed gearbox                                       |
| Speed                     | 0-350 min <sup>-1</sup> / 0-1250 min <sup>-1</sup>    |
| Blow rate                 | 0-5250 min <sup>-1</sup> / 0-18750 min <sup>-1</sup>  |
| Torque selector settings  | 18 + 1 + 1  |
| Drill chuck               | 13 mm (single sleeve)                                 |
| Charging time             | 1 h   |
| Standard accessories      | 2nd battery pack, charger, transport and storage case |
| Net weight   gross weight | 1.5 kg   3.3 kg                                       |
| Packing dimensions        | 310 x 100 x 295 mm                                    |
| Packaging unit            | 5   |
| Article number            | 45.138.25   |
| EAN code                  | 4 006825 610468                                       |

CORDLESS IMPACT DRILL

## TE-CD 18 Li-i Brushless

SOLO

**NEW!**



|                           |  |
|---------------------------|--|
| Battery pack              | Compatible with Power X-Change                           |
| Torque                    | 60 Nm  |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 - 500 min <sup>-1</sup> / 0-1800 min <sup>-1</sup>     |
| Blow rate                 | 0 - 9350 min <sup>-1</sup> / 0 - 31500 min <sup>-1</sup> |
| Torque selector settings  | 19 + 1 + 1   |
| Drill chuck               | 13 mm (single sleeve)                                    |
| Standard accessories      | Additional handle  |
| Net weight   gross weight | 1.4 kg   1.7 kg  |
| Packing dimensions        | 250 x 200 x 74 mm  |
| Packaging unit            | 5  |
| Article number            | 45.138.60  |
| EAN code                  | 4 006825 612417  |



Screw fixings, drilling, hammer drilling



High-quality 13 mm quick-change drill chuck made of metal



High quality quick-change chuck made of metal




Brushless motor for longer operating times and more power



2-speed metal gearbox



High-grade LED light

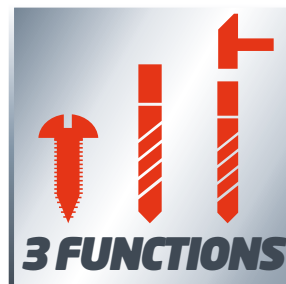

Screw fixings, drilling, hammer drilling



Safe grip thanks to additional handle

CORDLESS IMPACT DRILL  
**TE-CD 18-2 Li-i**



**POWER X CHANGE**



|                           |   |
|---------------------------|---|
| Battery pack              | 18 V / 1500 mAh / Li-Ion  |
| Torque                    | 48 Nm   |
| Gears                     | 2-speed gearbox   |
| Speed                     | 0 – 320 min <sup>-1</sup> / 0 – 1350 min <sup>-1</sup>  |
| Blow rate                 | 0 - 5120 min <sup>-1</sup> / 0 - 21600 min <sup>-1</sup>  |
| Torque selector settings  | 23 + 1 + 1  |
| Drill chuck               | 13 mm (single sleeve)   |
| Charging time             | 30 min  |
| Standard accessories      | System battery 1.5 Ah, 30 min fast charger, additional handle, metal depth stop, transport and storage case |
| Net weight   gross weight | 1.8 kg   4.0 kg   |
| Packing dimensions        | 420 x 335 x 105 mm  |
| Packaging unit            | 4   |
| Article number            | 45.138.00   |
| EAN code                  |   |



Screw fixings, drilling, hammer drilling



Large 13 mm quick-change chuck



Handy belt clip



Battery technology with Einhell ABS



Einhell Germany AG

CORDLESS IMPACT DRILL  
**TE-CD 18-2 Li-i - Solo**

Identical to TE-CD 18-2 Li-i,  
but without system battery and fast  
charger



Art. No. 45.138.02  
PU 8

EAN code



**BIT-SET**

23 pieces



Art. No. 42.580.73  
PU 72

EAN code



**DRILL AND BIT KIT**

70 pieces



Art. No. 42.580.85  
PU 10

EAN code





CORDLESS IMPACT DRIVER

## TE-CI 18 Li



**POWER X CHANGE**

|                           |  |
|---------------------------|--|
| Battery pack              | 18 V / 1500 mAh / Li-Ion   |
| Speed                     | 0 – 2300 min <sup>-1</sup>   |
| Torque                    | 140 Nm   |
| Charging time             | 30 min   |
| Gears                     | 1-speed gearbox  |
| Hexagon fitting           | 6.35 mm (1/4")   |
| Standard accessories      | System battery 1.5 Ah, 30 min fast charger, transport and storage case |
| Net weight   gross weight | 1.4 kg   3.4 kg  |
| Packing dimensions        | 330 x 110 x 308 mm   |
| Packaging unit            | 5  |
| Article number            | 45.100.20  |
| EAN code                  | 4 006825 601763  |

CORDLESS IMPACT DRIVER

### TE-CI 18 Li

Item identical to TE-CI 18 Li,  
but with 3.0 Ah system battery



Art. No. 45.100.21

PU 5

EAN code



4 006825 601794

CORDLESS IMPACT DRIVER

### TE-CI 18 Li - Solo

Item identical to TE-CI 18 Li,  
but without system battery  
and fast charger



Art. No. 45.100.23

PU 10

EAN code



4 006825 603507



The unrivaled Triathlon motor – power,  
speed and endurance



Special mechanism to reduce impact  
on the joints from screwing action



High-quality, robust design



Short, ergonomic design with soft grip





CORDLESS DRILL  
**TC-CD 12-2**

## NICKEL-CADMIUM BATTERIES

Einhell nickel-cadmium batteries

### Quality comes from experience.

The great benefit you get with nickel-cadmium batteries is Einhell's long-standing experience with this type of battery. No more surprises on the job or in the handling with this impressive and robust battery.


### Extremely durable.

Unlike other similar battery systems, nickel-cadmium batteries have one distinctive quality - they are considerably more tolerant of deep discharge.

### Excellent performance at low temperatures.

The high resistance of NiCd batteries comes into its own at low temperatures, making easy work of outside jobs.




|                           |  |
|---------------------------|--|
| Battery pack              | 12 V / 1100 mAh / NiCd   |
| Speed                     | 0 – 350 min <sup>-1</sup> / 0 – 1100 min <sup>-1</sup>   |
| Torque selector settings  | 14 Nm / 19 + 1   |
| Charging time             | 3 – 5 h  |
| Gears                     | 2-speed gearbox  |
| Drill chuck               | 10 mm (double sleeve)  |
| Standard accessories      | Charger, transport and storage case  |
|                           |  |
| Net weight   gross weight | 1.5 kg   2.9 kg  |
| Packing dimensions        | 290 x 305 x 115  |
| Packaging unit            | 5  |
|                           |  |
| Article number            | 45.135.20  |
| EAN code                  | <br>4 006825 581546 |



2-speed high-performance gearbox



Double sleeve drill chuck with quick stop

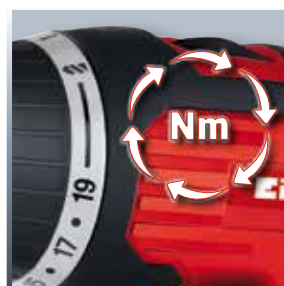

20-fold torque settings



Magnetic bit/screw holder



CORDLESS DRILL  
**TC-CD 14,4 2B**  
 WITH 2ND BATTERY PACK



|                                   |                           |
|-----------------------------------|---------------------------|
| Battery pack                      | 14.4 V / 1100 mAh / NiCd  |
| Speed                             | 0 – 550 min <sup>-1</sup> |
| Torque / Torque selector settings | 18 Nm / 19 + 1            |
| Charging time                     | 3 - 5 h                   |
| Gears                             | 1-speed gearbox           |
| Drill chuck                       | 10 mm (double sleeve)     |
| Standard accessories              | 2nd battery pack, charger |
| Net weight   gross weight         | 1.5 kg   2.7 kg           |
| Packing dimensions                | 230 x 250 x 90 mm         |
| Packaging unit                    | 10                        |
| Article number                    | 45.135.40                 |
| EAN code                          |                           |

CORDLESS DRILL  
**TC-CD 14,4-2 2B**  
 WITH 2ND BATTERY PACK



|                                   |  |
|-----------------------------------|--|
| Battery pack                      | 14.4 V / 1200 mAh / NiCd                               |
| Speed                             | 0 – 350 min <sup>-1</sup> / 0 – 1100 min <sup>-1</sup> |
| Torque / Torque selector settings | 24 Nm / 19 + 1   |
| Charging time                     | 3 – 5 h  |
| Gears                             | 2-speed gearbox  |
| Drill chuck                       | 10 mm  |
| Standard accessories              | 2nd battery pack, charger, transport and storage case  |
| Net weight   gross weight         | 1.5 kg   3.8 kg  |
| Packing dimensions                | 385 x 305 x 103 mm                                     |
| Packaging unit                    | 5  |
| Article number                    | 45.135.35  |
| EAN code                          |  |



Quickstop



High torque motor



2-speed high-performance gearbox



High-torque motor



Magnetic bit/screw holder



Soft grip



Quickstop



Soft grip

CORDLESS DRILL  
**TC-CD 18-2 2B**  
 WITH 2ND BATTERY PACK



|                                   |  |
|-----------------------------------|--|
| Battery pack                      | 18 V / 1200 mAh / NiCd                                 |
| Speed                             | 0 – 350 min <sup>-1</sup> / 0 – 1100 min <sup>-1</sup> |
| Torque / Torque selector settings | 30 Nm / 19 + 1   |
| Charging time                     | 3 – 5 h  |
| Gears                             | 2-speed gearbox  |
| Drill chuck                       | 10 mm  |
| Standard accessories              | 2nd battery pack, charger, transport and storage case  |
| Net weight   gross weight         | 1.7 kg   4.1 kg  |
| Packing dimensions                | 385 x 305 x 103 mm                                     |
| Packaging unit                    | 5  |
| Article number                    | 45.135.50  |
| EAN code                          | 4 006825 582376  |

CORDLESS DRILL  
**TH-CD 18-2**

Item identical to TC-CD 18-2 2B,  
 but without 2nd system battery



Art. No. 45.135.45  
 PU 5  
 EAN code



**BIT-SET**

23 pieces



Art. No. 42.580.73  
 PU 72  
 EAN code



**DRILL AND BIT KIT**

70 pieces



Art. No. 42.580.85  
 PU 10  
 EAN code



2-speed high-performance gearbox



High-torque motor



Quickstop



Battery capacity indicator

CORDLESS DRILL  
**TC-CD 18-2 1h**  
 WITH 2ND BATTERY PACK



|                                   |   |
|-----------------------------------|---|
| Battery pack                      | 18 V / 1200 mAh / NiCd  |
| Speed                             | 0 – 350 min <sup>-1</sup> / 0 – 1100 min <sup>-1</sup>        |
| Torque / Torque selector settings | 30 Nm / 19 + 1  |
| Charging time                     | 1 h   |
| Gears                             | 2-speed gearbox   |
| Drill chuck                       | 10 mm   |
| Standard accessories              | 2nd battery pack, 1 h fast charger, transport and storage box |
| Net weight   gross weight         | 1.2 kg   4.3 kg   |
| Packing dimensions                | 390 x 315 x 105 mm  |
| Packaging unit                    | 5   |
| Article number                    | 45.135.55   |
| EAN code                          |   |

CORDLESS IMPACT DRILL  
**TC-CD 18-2 i**



|                                   |  |
|-----------------------------------|--|
| Battery pack                      | 18 V / 1200 mAh / NiCd   |
| Speed                             | 0 – 300 min <sup>-1</sup> / 0 – 900 min <sup>-1</sup>          |
| Torque / Torque selector settings | 30 Nm / 19 + 1   |
| Charging time                     | 1 h  |
| Gears                             | 2-speed gearbox  |
| Drill chuck                       | 13 mm  |
| Standard accessories              | 2nd battery pack, 1 h fast charger, transport and storage case |
| Net weight   gross weight         | 2.0 kg   4.5 kg  |
| Packing dimensions                | 390 x 103 x 310 mm   |
| Packaging unit                    | 5  |
| Article number                    | 45.135.62  |
| EAN code                          |  |



1 hour fast charger



2-speed metal gearbox



Also suitable for drilling into masonry



2-speed metal gearbox



Battery capacity indicator



High-torque motor



Quick and easy tool-change



Battery capacity indicator



DRYWALL SCREW GUN  
**TH-DY 500 E**



## AUTO-START-STOP

### Fast - practical - powerful.

The Auto Start-Stop gear enables particularly fast screw operations. The motor is disconnected from the bit holder - the spindle only turns if the screw is pressed. The motor remains at the speed range and the screws are screwed in in next to no time.

### Consistent screw depth - clean result.

The infinitely adjustable depth stop stops the screwing-in process, ensuring consistent and precise screw depths.

|                  |                               |
|------------------|-------------------------------|
| Mains connection | 230 V ~ 50 Hz                 |
| Power rating     | 500 W                         |
| Speed            | 0 – 2200 min <sup>-1</sup>    |
| Tool chuck       | 6.35 mm (¼") internal hexagon |

|                           |                   |
|---------------------------|-------------------|
| Net weight   gross weight | 1.7 kg   2.1 kg   |
| Packing dimensions        | 315 x 230 x 75 mm |
| Packaging unit            | 5                 |


|                |           |
|----------------|-----------|
| Article number | 42.599.05 |
| EAN code       |           |



Robust aluminium gear head



Precise screw depth adjustment



Auto start/stop gearing



Handy belt clip

**E** DRILLING & MIXING  
**They make holes in walls and  
ceilings - not in your wallet.**




**Christian Boldinger**  
(Marketing Service,  
Einhell Germany AG)

One of my friends has been building his own house for the last three months. Naturally I like to do my bit as a good friend and help him out at the weekends. My Einhell hammer drill always goes with me as my trusty weapon for long and arduous DIY missions. It keeps us in high spirits on the building site – and the house-warming party is fast approaching!


IMPACT DRILL  
**TE-ID 500 €**



|   |  |
|---|--|
| Mains connection                        | 230 – 240 V ~ 50 Hz  |
| Power rating                            | 550 W  |
| Gears                                   | 1-speed gearbox  |
| Speed                                   | 0 – 3000 min <sup>-1</sup>   |
| Drilling capacity (wood/concrete/steel) | 25 / 10 / 8 mm   |
| Blow rate                               | 0 – 48000 min <sup>-1</sup>  |
| Drill chuck                             | 13 mm  |
| Standard accessories                    | Metal depth stop, additional handle, transport and storage case  |
| Net weight   gross weight               | 1.7 kg   3.2 kg  |
| Packing dimensions                      | 328 x 97 x 295 mm  |
| Packaging unit                          | 4  |
| Article number                          | 42.596.10  |
| EAN code                                | <br>4 006825 591347 |

IMPACT DRILL  
**TC-ID 650 €**



|   |  |
|---|--|
| Mains connection                        | 230 V ~ 50 Hz  |
| Power rating                            | 650 W  |
| Gears                                   | 1-speed gearbox  |
| Speed                                   | 0 – 2600 min <sup>-1</sup>   |
| Drilling capacity (wood/concrete/steel) | 25 / 13 / 10 mm  |
| Blow rate                               | 0 – 41600 min <sup>-1</sup>  |
| Drill chuck                             | 13 mm  |
| Standard accessories                    | Metal depth stop, additional handle  |
| Net weight   gross weight               | 1.8 kg   2.2 kg  |
| Packing dimensions                      | 282 x 68 x 225 mm  |
| Packaging unit                          | 10   |
| Article number                          | 42.586.82  |
| EAN code                                | <br>4 006825 602166 |



Quality chuck with locking function



Small, easy-to-use design



Practical belt hook to keep your hands free



Robust metal depth stop



Large ergonomic soft grip surfaces



Simple speed setting control



2 functions: drilling and hammer drilling



Simple speed setting control



# IMPACT DRILL RT-ID 65/1



|   |   |
|---|---|
| Mains connection                        | 230 – 240 V ~ 50 Hz   |
| Power rating                            | 650 W   |
| Gears                                   | 1-speed gearbox   |
| Speed                                   | 0 – 3000 min <sup>-1</sup>                                      |
| Drilling capacity (wood/concrete/steel) | 25 / 13 / 10 mm   |
| Blow rate                               | 0 – 48000 min <sup>-1</sup>                                     |
| Drill chuck                             | 13 mm   |
| Standard accessories                    | Metal depth stop, additional handle, transport and storage case |
| Net weight   gross weight               | 2.1 kg   3.7 kg   |
| Packing dimensions                      | 340 x 348 x 120 mm  |
| Packaging unit                          | 5   |
| Article number                          | 42.597.35   |
| EAN code                                |   |



Quality chuck and spindle lock



3 functions: screw fixings, drilling, hammer drilling



Additional handle with drill bit depot



Simple speed setting control

## DRILL AND BIT KIT 70 pieces



Art. No. 42.580.85  
PU 10  
EAN code



Einhell Germany AG

# IMPACT DRILL TC-ID 710 E



|   |                                     |
|---|-------------------------------------|
| Mains connection                        | 230 V ~ 50 Hz                       |
| Power rating                            | 710 W                               |
| Gears                                   | 1-speed gearbox                     |
| Speed                                   | 0 – 2700 min <sup>-1</sup>          |
| Drilling capacity (wood/concrete/steel) | 25 / 13 / 10 mm                     |
| Blow rate                               | 0 – 43200 min <sup>-1</sup>         |
| Drill chuck                             | 13 mm                               |
| Standard accessories                    | Metal depth stop, additional handle |
| Net weight   gross weight               | 2.1 kg   2.3 kg                     |
| Packing dimensions                      | 307 x 78 x 240mm                    |
| Packaging unit                          | 6                                   |
| Article number                          | 42.597.61                           |
| EAN code                                | 4 006825 602173                     |



Robust metal depth stop



2 functions: drilling and hammer drilling



Electronic speed control



Additional handle

# IMPACT DRILL TC-ID 720 E




|   |                                     |
|---|-------------------------------------|
| Mains connection                        | 230 – 240 V ~ 50 Hz                 |
| Power rating                            | 720 W                               |
| Gears                                   | 1-speed gearbox                     |
| Speed                                   | 0 – 2700 min <sup>-1</sup>          |
| Drilling capacity (wood/concrete/steel) | 30 / 13 / 10 mm                     |
| Blow rate                               | 0 – 43200 min <sup>-1</sup>         |
| Drill chuck                             | 13 mm                               |
| Standard accessories                    | Metal depth stop, additional handle |
| Net weight   gross weight               | 2.0 kg   2.4 kg                     |
| Packing dimensions                      | 325 x 80 x 242 mm                   |
| Packaging unit                          | 5                                   |
| Article number                          | 42.598.19                           |
| EAN code                                |                                     |



Quick chuck with locking function



Additional handle with anti-twist protection

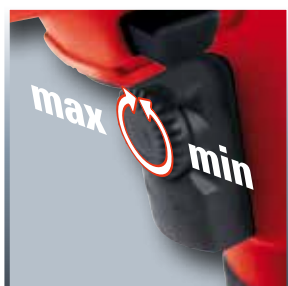

Electronic speed control



Large ergonomic soft grip surfaces



Einhell Germany AG

## DRILL AND BIT KIT 70 pieces



Art. No. 42.580.85  
PU 10  
EAN code







**Without constant electronic control**



**With constant electronic control**

## CONSTANT ELECTRONIC CONTROL - CRUISE CONTROL FOR POWER TOOLS

**Always on full power.**

Dynamic speed control – for zero speed loss even under load.

**Better – safer – faster.**

The constant electronic control guarantees consistent speed and smooth drilling action. The result is better, the process is safer, and progress is faster.

### IMPACT DRILL TE-ID 750/1 E

Item identical to TE-ID 750 E,  
but dust extraction device not  
included

Art. No. 42.596.71

PU 4

EAN code



### IMPACT DRILL TH-ID 1000 KIT

Item identical to TH-ID 1000,  
but with 50 pcs. drill and bit set

Art. No. 42.598.28

PU 6

EAN code



### IMPACT DRILL TE-ID 1050/1 CE

Item identical to TE-ID 1050 CE  
but dust extraction device not  
included

Art. No. 42.596.21

PU 2

EAN code



## IMPACT DRILL TE-ID 750 E



CE

|   |   |
|---|---|
| Mains connection                        | 220 - 240 V ~ 50 Hz   |
| Power rating                            | 750 W   |
| Gears                                   | 1-speed gearbox   |
| Speed                                   | 0 - 2700 min <sup>-1</sup>  |
| Drilling capacity (wood/concrete/steel) | 30 / 14 / 12 mm   |
| Blow rate                               | 0 - 43200 min <sup>-1</sup>   |
| Drill chuck                             | 13 mm   |
| Standard accessories                    | Metal depth stop, additional handle, dust extraction device, transport and storage case |
| Net weight   gross weight               | 2.4 kg   4.0 kg   |
| Packing dimensions                      | 360 x 120 x 285 mm  |
| Packaging unit                          | 4   |
| Article number                          | 42.596.70   |
| EAN code                                | 4 006825 589054   |



Dust-free drilling



Drill bits easy to change



Simple speed setting control



Additional handle with anti-twist protection

# IMPACT DRILL TH-ID 1000 E



|   |                                     |
|---|-------------------------------------|
| Mains connection                        | 230 V ~ 50 Hz                       |
| Power rating                            | 1010 W                              |
| Gears                                   | 1-speed gearbox                     |
| Speed                                   | 0 – 3000 min <sup>-1</sup>          |
| Drilling capacity (wood/concrete/steel) | 32 / 16 / 13 mm                     |
| Blow rate                               | 0 – 48000 min <sup>-1</sup>         |
| Drill chuck                             | 13 mm                               |
| Standard accessories                    | Metal depth stop, additional handle |
| Net weight   gross weight               | 2.1 kg   2.6 kg                     |
| Packing dimensions                      | 315 x 141 x 235 mm                  |
| Packaging unit                          | 8                                   |
| Article number                          | 42.598.25                           |
| EAN code                                |                                     |

# HAMMER DRILL WITH CONSTANT ELECTRONIC CONTROL SYSTEM TE-ID 1050 CE



|   |   |
|---|---|
| Mains connection                        | 230 V ~ 50 Hz   |
| Power rating                            | 1050 W  |
| Gears                                   | 2-speed gearbox   |
| Speed                                   | 0 – 1000 min <sup>-1</sup> / 0 – 2800 min <sup>-1</sup>                                 |
| Drilling capacity (wood/concrete/steel) | 40 / 16 / 13 mm   |
| Blow rate                               | 0 – 15000 min <sup>-1</sup> / 0 – 42000 min <sup>-1</sup>                               |
| Drill chuck                             | 13 mm   |
| Standard accessories                    | Metal depth stop, additional handle, dust extraction device, transport and storage case |
| Net weight   gross weight               | 3.0 kg   5.0 kg   |
| Packing dimensions                      | 400 x 120 x 330 mm  |
| Packaging unit                          | 2   |
| Article number                          | 42.596.20   |
| EAN code                                |   |



Robust metal drill chuck



Additional handle with anti-twist protection



Dust-free drilling



2-speed gear – screwing and drilling




Electronic speed control



Large ergonomic soft grip surfaces



Electronic speed control prevents loss of power



Additional handle with anti-twist protection

CORDLESS ROTARY HAMMER

## TE-HD 18 Li

**NEW!**



**POWER X CHANGE**

|                            |  |
|----------------------------|--|
| Battery pack               | 18 V / 1500 mAh / Li-Ion   |
| Speed                      | 0 – 1100 min <sup>-1</sup>   |
| Blow rate/strength         | 0 – 5700 min <sup>-1</sup> / 1.0 J   |
| Drilling capacity concrete | 12 mm  |
| Drill chuck                | SDS-plus tool holder   |
| Standard accessories       | System battery 1.5 Ah, 30 min fast charger, bit holder, transport and storage case |
| Net weight   gross weight  | 1.5 kg   4.3 kg  |
| Packing dimensions         | 110 x 330 x 410 mm   |
| Packaging unit             | 4  |
| Article number             | 45.138.10  |
| EAN code                   | 4 006825 604047  |



SDS-plus tool holder



Robust metal gearbox



Simple speed setting control



LED-light

**POWER X CHANGE**

**FAMILY**



BOOSTED BY  
**TWIN PACK®**  
2 x 18 V = 36 V SUPERPOWER

CORDLESS ROTARY HAMMER

### TE-HD 18 Li - Solo

Item identical to TE-HD 18 Li,  
but without system battery  
and fast charger

**NEW!**



Art. No. 45.138.12

PU 8

EAN code



4 006825 604054



## ROTARY HAMMER RT-RH 20/1



|                            |   |
|----------------------------|---|
| Mains connection           | 220 – 240 V ~ 50 Hz   |
| Power rating               | 500 W   |
| Speed                      | 0 – 1200 min <sup>-1</sup>                                      |
| Blow rate/strength         | 0 – 5800 min <sup>-1</sup> / 1.6 J                              |
| Drilling capacity concrete | 20 mm   |
| Drill chuck                | SDS-plus tool holder  |
| Standard accessories       | Metal depth stop, additional handle, transport and storage case |
| Net weight   gross weight  | 2.2 kg   4.5 kg   |
| Packing dimensions         | 350 x 122 x 337 mm  |
| Packaging unit             | 3   |
| Article number             | 42.584.91   |
| EAN code                   |   |

## ROTARY HAMMER TC-RH 800 E



|                              |   |
|------------------------------|---|
| Mains connection             | 230 – 240 V ~ 50 Hz   |
| Power rating                 | 800 W   |
| Speed                        | 0 – 1000 min <sup>-1</sup>                                      |
| Blow rate/-strength          | 0 – 5180 min <sup>-1</sup> / 2.5 J                              |
| Drilling capacity (concrete) | 26 mm   |
| Drill chuck                  | SDS-plus tool holder  |
| Standard accessories         | Metal depth stop, additional handle, transport and storage case |
| Net weight   gross weight    | 3.3 kg   5.2 kg   |
| Packing dimensions           | 400 x 360 x 104 mm  |
| Packaging unit               | 3   |
| Article number               | 42.579.20   |
| EAN code                     |   |



4 functions: hammer drilling / drilling / chiseling / chisel lock



Speed control electronics with r/l run



Metal depth stop



Cable clip



4 functions: hammer drilling / drilling / chiseling / chisel lock



Speed control electronics with r/l run



Safety slip coupling



Hand guard

## ROTARY HAMMER TC-RH 900



|                            |   |
|----------------------------|---|
| Mains connection           | 220 – 240 V ~ 50 Hz   |
| Power rating               | 900 W   |
| Speed                      | 850 min <sup>-1</sup>   |
| Blow rate/strength         | 4100 min <sup>-1</sup> / 3.0 J  |
| Drilling capacity concrete | 26 mm   |
| Drill chuck                | SDS-plus tool holder  |
| Standard accessories       | Metal depth stop, additional handle, dust cap, transport and storage case |
| Net weight   gross weight  | 4.3 kg   6.0 kg   |
| Packing dimensions         | 402 x 305 x 127 mm  |
| Packaging unit             | 2   |
| Article number             | 42.582.37   |
| EAN code                   |   |


## ROTARY HAMMER TH-RH 1600



|                            |   |
|----------------------------|---|
| Mains connection           | 230 – 240 V ~ 50 Hz   |
| Power rating               | 1600 W  |
| Speed                      | 800 min <sup>-1</sup>   |
| Blow rate/strength         | 3900 min <sup>-1</sup> / 4.0 J  |
| Drilling capacity concrete | 32 mm   |
| Drill chuck                | SDS-plus tool holder  |
| Standard accessories       | Metal depth stop, additional handle, dust cap, transport and storage case |
| Net weight   gross weight  | 7.6 kg   7.8 kg   |
| Packing dimensions         | 440 x 365 x 130 mm  |
| Packaging unit             | 2   |
| Article number             | 42.584.78   |
| EAN code                   |   |



Sturdy, durable design



Safety slip coupling



Sturdy, durable design




Vibration-absorbing handle




Additional handle with anti-twist protection



3 functions: screw fixings, drilling, hammer drilling



Safety slip coupling

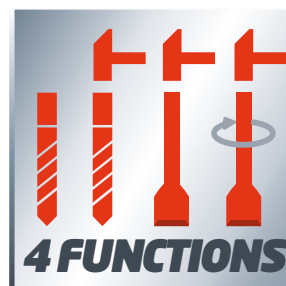


4 functions: hammer drilling / drilling / chiseling / chisel lock

## ROTARY HAMMER RT-RH 32



|                            |  |
|----------------------------|--|
| Mains connection           | 230 V ~ 50 Hz  |
| Power rating               | 1250 W   |
| Speed                      | 800 min <sup>-1</sup>  |
| Blow rate/strength         | 4300 min <sup>-1</sup> / 3.5 J   |
| Drilling capacity concrete | 32 mm  |
| Drill chuck                | SDS-plus tool holder   |
| Standard accessories       | Metal depth stop, additional handle, 3 SDS-plus drills, 2 SDS-plus chisels, dust cap, transport and storage case |
| Net weight   gross weight  | 6.1 kg   9.5 kg  |
| Packing dimensions         | 445 x 140 x 340 mm   |
| Packaging unit             | 2  |
| Article number             | 42.584.40  |
| EAN code                   |  |



Vibration-absorbing handle



Metal gear head and metal depth stop



Additional drills and chisels



Rotate stop (with chisel fixing)



Einhell Germany AG

### ROTARY HAMMER RT-RH 32 KIT

Item identical to RT-RH 32,  
but including 13-pcs. drill bits and  
chisels set



Art. No. 42.584.85

PU 2

EAN code





# ROTARY HAMMER TE-RH 32 E



## **PRESS CONTROL -** JUST THE RIGHT AMOUNT OF PRESSURE EVERY TIME

### **Fast drilling – less effort.**

The TE-RH 32 E hammer drill has a very powerful pneumatic hammer action. The rapid drilling force is generated by the machine so the user only needs to apply slight pressure. The press control visual display indicates exactly how much pressure to apply for swift progress.

### **Fewer vibrations – less strain.**

Excessive pressure does not speed up the drilling rate but only causes unnecessary vibrations. The press control function makes light work of drilling, making it more pleasant and less tiring for the user.

### **Less pressure – longer service life**

The ability to control the pressure also reduces machine and tool wear. This lengthens the service life of the machine to a significant extent.



|                            |   |
|----------------------------|---|
| Mains connection           | 230 V ~ 50 Hz   |
| Power rating               | 1250 W  |
| Speed                      | 0 – 850 min <sup>-1</sup>   |
| Blow rate/strength         | 0 – 4100 min <sup>-1</sup> / 5.0 J  |
| Drilling capacity concrete | 32 mm   |
| Drill chuck                | SDS-plus tool holder  |
| Standard accessories       | Metal depth stop, additional handle, dust cap, transport and storage case |
| Net weight   gross weight  | 5.7 kg   7.9 kg   |
| Packing dimensions         | 445 x 370 x 130 mm  |
| Packaging unit             | 2   |
| Article number             | 42.579.40   |
| EAN code                   | 4 006825 591309   |



Vibration absorption with press control




Electronic control system for gentle drilling

**SDS-PLUS DRILL BIT AND CHISEL KIT**  
12 pieces

Art. No. 42.580.90  
PU 6  
EAN code



2 status LEDs: ready for operation and service (brush wear)

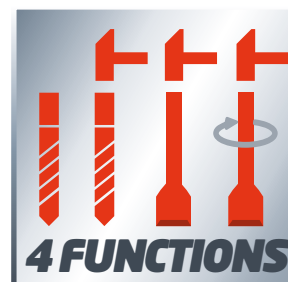

4 functions: hammer drilling / drilling / chiseling / chisel lock

## ROTARY HAMMER TE-RH 38 E



|                            |   |
|----------------------------|---|
| Mains connection           | 220 – 240 V ~ 50 Hz   |
| Power rating               | 1050 W  |
| Speed                      | 0 – 500 min <sup>-1</sup>   |
| Blow rate/strength         | 0 - 4100 min <sup>-1</sup> / 9.0 J  |
| Drilling capacity concrete | 38 mm   |
| Drill chuck                | SDS-max tool holder   |
| Standard accessories       | Metal depth stop, additional handle, dust cap, transport and storage case |
| Net weight   gross weight  | 6.9 kg   9.5 kg   |
| Packing dimensions         | 452 x 133 x 345 mm  |
| Packaging unit             | 2   |
| Article number             | 42.579.50   |
| EAN code                   |   |

## DEMOLITION HAMMER TE-DH 1027



DE: price/performance "Good"



|                           |  |
|---------------------------|--|
| Mains connection          | 230 – 240 V ~ 50 Hz                          |
| Power rating              | 1500 W                                       |
| Blow rate                 | 1900 min <sup>-1</sup>                       |
| Blow strength             | 32.0 J                                       |
| Drill chuck               | SDS-max tool holder                          |
| Long power cable          | 4 m  |
| Standard accessories      | 1 pointed chisel, transport and storage case |
| Net weight   gross weight | 10.2 kg   15.4 kg                            |
| Packing dimensions        | 635 x 177 x 400 mm                           |
| Packaging unit            | 1  |
| Article number            | 41.390.90                                    |
| EAN code                  |  |



Vibration absorption with press control



2 status LEDs: ready for operation and service (brush wear)



Aluminum alloy gearbox



Simple chisel adjustment function on drill chuck



Speed electronics for finely dosed power generation



Powerful – for drilling holes of up to Ø 38 mm in concrete



Vibration-absorbing handle



Additional handle with 360° adjustment function

PAINT AND MORTAR MIXER  
**TC-MX 1100 €**



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 1050 W  |
| Gears                     | 1-speed gearbox   |
| Speed                     | 0 – 550 min <sup>-1</sup>   |
| Mixing tool mount         | 13 mm drill chuck   |
| Standard accessories      | Additional handle, spiral stirrer for paint, etc. Ø 58 mm, l = 530 mm |
| Net weight   gross weight | 3.3 kg   3.7 kg   |
| Packing dimensions        | 315 x 255 x 100 mm  |
| Packaging unit            | 5   |
| Article number            | 42.585.17   |
| EAN code                  |   |

PAINT AND MORTAR MIXER  
**TC-MX 1400-2 €**

**NEW!**



|                           |   |
|---------------------------|---|
| Mains connection          | 220 – 240 V ~ 50 Hz   |
| Power rating              | 1400 W  |
| Gears                     | 2-speed gearbox   |
| Speed                     | 0 - 480 min <sup>-1</sup> / 0 - 780 min <sup>-1</sup>         |
| Mixing tool mount         | M14   |
| Standard accessories      | 1 spiral mixing tool for mortar Ø 133 mm, 2 open-end spanners |
| Net weight   gross weight | 3.7 kg   6.1 kg   |
| Packing dimensions        | 325 x 325 x 210 mm  |
| Packaging unit            | 2   |
| Article number            | 42.585.50   |
| EAN code                  |   |



Universal application – for stirring and drilling



Electronic speed control for adjustment to the material



Large ergonomic soft grip surfaces



Electronic speed control with constant electronic control



Powerful motor for high mixing output



Thanks to additional handles and soft grip it's comfortable to use



Practical handle design to stand the tool upright when not in use



Shaft mount on the gear neck for stationary operation



**NEW!**

# PAINT AND MORTAR MIXER TE-MX 1600-2 CE



|                           |  |
|---------------------------|--|
| Mains connection          | 220 – 240 V ~ 50 Hz  |
| Power rating              | 1600 W   |
| Gears                     | 2-speed gearbox  |
| Speed                     | 0 – 460 min <sup>-1</sup> / 0 – 750 min <sup>-1</sup>              |
| Mixing tool mount         | M14  |
| Standard accessories      | 1 spiral-mixing tool for mortar<br>Ø 133 mm, 2 open-ended spanners |
| Net weight   gross weight | 3.7 kg   6.0 kg  |
| Packing dimensions        | 325 x 325 x 210 mm   |
| Packaging unit            | 2  |
| Article number            | 42.585.55  |
| EAN code                  |  |



2-speed gearing to select optimum speed for the consistency of the mixture.



Electronic speed control with constant electronic control



Practical handle design to stand the tool upright when not in use




Constant electronic control for zero speed loss even under load



Einhell Germany AG



Without constant electronic control

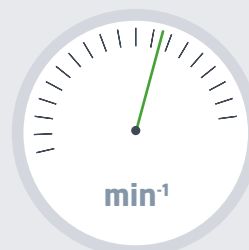

With constant electronic control

## CONSTANT ELECTRONIC CONTROL – CRUISE CONTROL FOR POWER TOOLS

**Always on full power – for simpler and better mixing.**

Dynamic speed control – for zero speed loss even under load. This guarantees a very even mixture regardless of the consistency of the substances being mixed. Whether paint or adhesive, bitumen or mortar – perfect results every time.

### MIXER KIT M14

2 pieces  
for bitumen, epoxide,  
adhesive and mortar, plaster



Art. No. 42.583.65  
PU 4

EAN code



 CUTTING

# Grinding, cutting, saving - all with one tool.



**Christoph Gaßner**  
(Marketing Management,  
Einhell Germany AG)

My little Einhell angle grinder is lightweight and compact. And practical! The spindle lock and tool-free wheel adjustment function make my work a pleasure. Last spring I made my own smoker and I hardly put the angle grinder down for a minute. No problem!

And the meat tastes twice as good from a home-made grill!





**NEW!**

CORDLESS ANGLE GRINDER

**TE-AG 18 Li**



**POWER X CHANGE**



DE: rating "Very good"



|                      |   |
|----------------------|---|
| Battery pack         | 18 V / 3000 mAh / Li-Ion  |
| Speed                | 8500 min <sup>-1</sup>  |
| Disc diameter        | 115 mm  |
| Standard accessories | Key (storage compartment in additional handle), system battery, charger, transport and storage case |

Cutting disc not included

Net weight | gross weight 2.3 kg | 3.2 kg

Packing dimensions 315 x 145 x 145 mm

Packaging unit n/a

Article number 44.311.13

EAN code



Extensive safety package: restart safeguard, softstart function and overload cut-out



Slimline design for comfortable and ergonomic operation



Greatly reduced vibrations thanks to separation of motor and gearing.



Lightest angle grinder in its class



Einhell Germany AG

**POWER X CHANGE**

**FAMILY**



BOOSTED BY

**TWIN PACK®**

2 x 18 V = 36 V SUPERPOWER

CORDLESS ANGLE GRINDER

**TE-AG 18 Li - Solo**

Item identical to TE-AG 18 Li, but without system battery and fast charger



Art. No. 44.311.10

PU 6

EAN code



You will find an extensive range of cutting/grinding/roughing wheels and other accessories at:



[www.kwb.eu](http://www.kwb.eu)




## ANGLE GRINDER TC-AG 115



|                           |                           |
|---------------------------|---------------------------|
| Mains connection          | 230 V ~ 50 Hz             |
| Power rating              | 500 W                     |
| Speed                     | 12000 min <sup>-1</sup>   |
| Disc diameter             | 115 mm                    |
| Standard accessories      | Key                       |
|                           | Cutting disc not included |
| Net weight   gross weight | 1.7 kg   1.8 kg           |
| Packing dimensions        | 297 x 95 x 120 mm         |
| Packaging unit            | 6                         |
| Article number            | 44.306.18                 |
| EAN code                  |                           |

## ANGLE GRINDER RT-AG 115



|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                  |
| Power rating              | 600 W  |
| Speed                     | 12000 min <sup>-1</sup>                        |
| Disc diameter             | 115 mm   |
| Standard accessories      | Key (storage compartment in additional handle) |
|                           | Cutting disc not included                      |
| Net weight   gross weight | 1.8 kg   2.3 kg                                |
| Packing dimensions        | 325 x 128 x 115 mm                             |
| Packaging unit            | 6  |
| Article number            | 44.305.50                                      |
| EAN code                  |  |



Low-profile gear head enables the user to reach areas which are difficult to access



Spindle lock for easy disc change



Disc guard quick adjust



Cable clip



The additional handle can be set to two positions for different working positions



Lightweight and compact design



Soft grip



Key in additional handle

ANGLE GRINDER  
**TE-AG 115/600**



|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                  |
| Power rating              | 600 W  |
| Speed                     | 11000 min <sup>-1</sup>                        |
| Disc diameter             | 115 mm   |
| Standard accessories      | Key (storage compartment in additional handle) |
|                           | Cutting disc not included                      |
| Net weight   gross weight | 1.9 kg   2.5 kg                                |
| Packing dimensions        | 325 x 130 x 125 mm                             |
| Packaging unit            | 6  |
| Article number            | 44.308.55                                      |
| EAN code                  |  |

ANGLE GRINDER  
**TE-AG 115**



|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                  |
| Power rating              | 720 W  |
| Speed                     | 11000 min <sup>-1</sup>                        |
| Disc diameter             | 115 mm   |
| Standard accessories      | Key (storage compartment in additional handle) |
|                           | Cutting disc not included                      |
| Net weight   gross weight | 1.9 kg   2.4 kg                                |
| Packing dimensions        | 325 x 125 x 130 mm                             |
| Packaging unit            | 6  |
| Article number            | 44.308.50                                      |
| EAN code                  |  |



Disc guard quick adjust



Cable clip



Disc guard quick adjust



Cable clip



Lightweight and compact design



Key in additional handle



The additional handle can be set to three positions for different working positions.



Key in additional handle

# ANGLE GRINDER TC-AG 125



|                      |                         |
|----------------------|-------------------------|
| Mains connection     | 230 V ~ 50 Hz           |
| Power rating         | 850 W                   |
| Speed                | 11000 min <sup>-1</sup> |
| Disc diameter        | 125 mm                  |
| Standard accessories | Key                     |

Cutting disc is not included

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 2.1 kg   2.3 kg    |
| Packing dimensions        | 295 x 115 x 100 mm |
| Packaging unit            | 6                  |
| Article number            | 44.306.19          |
| EAN code                  |                    |



4 006825 603286

## ANGLE GRINDER TC-AG 125 KIT

Item identical to TC-AG 125,  
but including 2 diamond cutting  
discs and additional cutting  
disc guard

Art. No. 44.306.24

PU 6

EAN code



4 006825 608373

## ANGLE GRINDER TE-AG 125/750 KIT

Item identical to TE-AG 125/750,  
but including 1 diamond cutting  
disc and additional cutting disc  
guard

Art. No. 44.308.85

PU 4

EAN code



4 006825 589832

## CUTTING STAND TS 115/125

for angle grinders with wheel  
diameters of 115 and 125 mm

Art. No. 44.310.40

PU 4

EAN code



4 006825 506457

You will find an extensive range of cutting/grinding/  
roughing wheels and other accessories at:



[www.kwb.eu](http://www.kwb.eu)



Low-profile gear head enables the user to  
reach areas which are difficult to access



Spindle lock for easy disc change



The additional handle can be set to two  
positions for different working positions.



Lightweight and compact design



ANGLE GRINDER  
**TE-AG 125/750**



|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                  |
| Power rating              | 750 W  |
| Speed                     | 11000 min <sup>-1</sup>                        |
| Disc diameter             | 125 mm   |
| Standard accessories      | Key (storage compartment in additional handle) |
|                           | Cutting disc not included                      |
| Net weight   gross weight | 2.2 kg   2.6 kg                                |
| Packing dimensions        | 335 x 145 x 120 mm                             |
| Packaging unit            | 6  |
| Article number            | 44.308.80                                      |
| EAN code                  |  |

ANGLE GRINDER  
**RT-AG 125/1**



|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                  |
| Power rating              | 1010 W   |
| Speed                     | 12000 min <sup>-1</sup>                        |
| Disc diameter             | 125 mm   |
| Standard accessories      | Key (storage compartment in additional handle) |
|                           | Cutting disc not included                      |
| Net weight   gross weight | 2.2 kg   2.7 kg                                |
| Packing dimensions        | 420 x 103 x 115 mm                             |
| Packaging unit            | 6  |
| Article number            | 44.305.60                                      |
| EAN code                  |  |



Disc guard quick adjust



Flat metal gear head



Disc guard quick adjust



Spindle lock



Soft grip



Key in additional handle




Soft grip




Key in additional handle

# TE-AG 125 CE



Without constant  
electronic control



With constant  
electronic control

## CONSTANT ELECTRONIC CONTROL - CRUISE CONTROL FOR POWER TOOLS

**Always on full power.**

Dynamic speed control – for zero speed loss even under load.

**Better – safer – faster.**

The constant electronic control guarantees consistent speed and smooth cutting and grinding action. The result is better, the process is safer, and progress is faster.



CE

Mains connection 230 V ~ 50 Hz

Power rating 1100 W

Speed 3000 - 11000 min<sup>-1</sup>

Disc diameter 125 mm

Standard accessories Key (storage compartment in additional handle)

Cutting disc not included

Net weight | gross weight 2.5 kg | 3.0 kg

Packing dimensions 440 x 140 x 125 mm

Packaging unit 6

Article number 44.308.60

EAN code



### CUTTING STAND TS 115/125

for angle grinders with wheel  
diameters of 115 and 125 mm



Art. No. 44.310.40

PU 4

EAN code



### CUTTING STAND TS 230

for angle grinders with wheel  
diameters of 230 mm



Art. No. 44.310.50

PU 6

EAN code



### DIAMOND WHEEL SET

for angle grinders Ø 230 mm  
230 mm, 2 pieces



Art. No. 44.403.33

PU 1

EAN code




Constant electronics



Disc guard quick adjust



Slim design

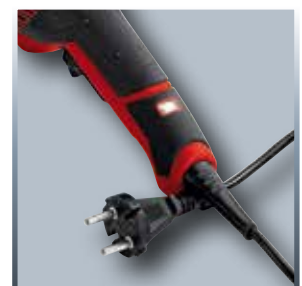

Softgrip und cable clip

## ANGLE GRINDER TE-AG 230/2000



|                           |                           |
|---------------------------|---------------------------|
| Mains connection          | 230 V ~ 50 Hz             |
| Power rating              | 2000 W                    |
| Speed                     | 6500 min <sup>-1</sup>    |
| Disc diameter             | 230 mm                    |
| Standard accessories      | Key                       |
|                           | Cutting disc not included |
| Net weight   gross weight | 5.4 kg   6.3 kg           |
| Packing dimensions        | 540 x 140 x 160 mm        |
| Packaging unit            | 2                         |
| Article number            | 44.308.40                 |
| EAN code                  |                           |

## ANGLE GRINDER TE-AG 230



|                           |                           |
|---------------------------|---------------------------|
| Mains connection          | 230 V ~ 50 Hz             |
| Power rating              | 2350 W                    |
| Speed                     | 6500 min <sup>-1</sup>    |
| Disc diameter             | 230 mm                    |
| Standard accessories      | Key                       |
|                           | Cutting disc not included |
| Net weight   gross weight | 5.4 kg   6.8 kg           |
| Packing dimensions        | 565 x 125 x 183 mm        |
| Packaging unit            | 2                         |
| Article number            | 44.308.70                 |
| EAN code                  |                           |



Toolless disc guard adjustment



Soft start



Disc guard quick adjust



Soft start



Soft grip



Cable clip



Adjustable main grip



Anti-vibration main grip and soft grip



# MILLING & PLANING

## Shave money off your home maintenance bills with a good plane.



**Alexander Mock**  
(Purchasing, Einhell Germany AG)

I decided that my own hand-held plane had served its time and bought myself an Einhell electric plane. I have been using it to do jobs in and around the house for over six months. The plane is so easy to use and is so versatile that it is an indispensable tool in my workshop. The new summer house went up in next to no time, for example, although I did of course have some help from my other Einhell tools.

# MASONRY CHANNEL CUTTER

## TH-MA 1300



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz                                     |
| Power rating              | 1320 W  |
| Speed                     | 9000 min <sup>-1</sup>                            |
| Cuting disc               | Ø 125 x Ø 22.2 mm                                 |
| Slot depth / Slot width   | 8 – 30 mm / 8 – 26 mm                             |
| Standard accessories      | Key for changing disc, transport and storage case |
| Net weight   gross weight | 4.9 kg   6.3 kg                                   |
| Packing dimensions        | 390 x 230 x 270 mm                                |
| Packaging unit            | 3   |
| Article number            | 43.507.30   |
| EAN code                  |   |

# BISCUIT JOINTER

## TC-BJ 900




|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                      |
| Power rating              | 860 W  |
| Speed                     | 11000 min <sup>-1</sup>                            |
| Cutting depth max.        | 14 mm  |
| Angle adjustment          | Infinitely to 90°                                  |
| Height adjustment         | 5 – 35 mm  |
| Standard accessories      | Dust bag, face spanner, transport and storage case |
| Net weight   gross weight | 3.3 kg   4.6 kg                                    |
| Packing dimensions        | 430 x 170 x 230 mm                                 |
| Packaging unit            | 2  |
| Article number            | 43.506.20  |
| EAN code                  |  |




Suitable for plaster, brickwork, aerated concrete and plasterboard



Dust emissions greatly reduced

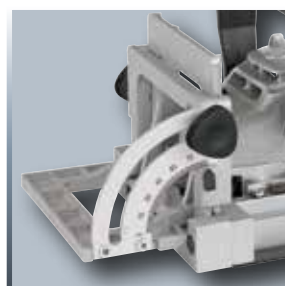

Infinitely variable angle adjustment from 0° to 90°

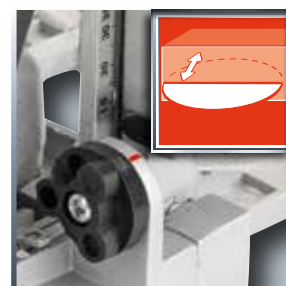

Cutting depth up to 14 mm – suitable for biscuit dowel types 0 / 10 / 20



Overload protected



Soft start

### CUTTER BLADE for TC-BJ 900

Art. No. 43.506.90  
PU 50  
EAN code





# ROUTER TC-RO 1155 E


# ROUTER TE-RO 1255 E



|                           |   |
|---------------------------|---|
| Mains connection          | 230 – 240 V ~ 50 Hz   |
| Power rating              | 1100 W  |
| Speed                     | 11000 – 30000 min <sup>-1</sup>   |
| Stroke height             | 55 mm   |
| Clamp                     | 6 and 8 mm  |
| Standard accessories      | Parallel guide, compass, copy sleeve, key, clamp (6/8 mm), dust extraction adapter, chip shield |
| Net weight   gross weight | 3.0 kg   4.1 kg   |
| Packing dimensions        | 287 x 144 x 230 mm  |
| Packaging unit            | 4   |
| Article number            | 43.504.70   |
| EAN code                  |   |



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 1200 W  |
| Speed                     | 11000 – 30000 min <sup>-1</sup>   |
| Stroke height             | 55 mm   |
| Clamp                     | 6 and 8 mm  |
| Standard accessories      | Parallel guide, compass, copy sleeve, key, clamp (6/8 mm), dust extraction adapter, chip shield |
| Net weight   gross weight | 3.2 kg   4.4 kg   |
| Packing dimensions        | 280 x 278 x 172 mm  |
| Packaging unit            | 4   |
| Article number            | 43.504.90   |
| EAN code                  |   |



Identical in construction to the tested RT-RO 55



Chip shield



Precision depth adjustment



Chip shield




Precision depth adjustment with revolver stop




Depth adjustment with revolver stop



Speed control electronic



Soft grip




Cable clip



# ELECTRIC PLANER TE-PL 850



|                            |   |
|----------------------------|---|
| Mains connection           | 230 V ~ 50 Hz   |
| Power rating               | 850 W   |
| Speed                      | 15000 min <sup>-1</sup>   |
| Chip depth / planing width | 0 – 3 mm / 82 mm  |
| Rebate depth               | 0 – 18 mm   |
| Standard accessories       | Parallel guide, rebate depth stop, dust extraction adapter                          |
| Net weight   gross weight  | 3.6 kg   4.0 kg   |
| Packing dimensions         | 370 x 185 x 200 mm  |
| Packaging unit             | 4   |
| Article number             | 43.452.70   |
| EAN code                   |  |



Chip ejection to the left or right



Automatic park rest



Blade and tool depot



Rebate depth stop



Einhell Germany AG

## GANG CUTTER FS 12

for TC-RO 1155 E and TE-RO 1255 E  
12-piece, in wooden case



Art. No. 43.501.99

PU 20

EAN code



4 006825 431391

## BLADE SET

for TE-PL 850  
2-piece, reversible blade



Art. No. 43.102.35

PU 1

EAN code



4 006825 574968

 SAWING

# Einhell saws simply make a darn good job of cutting.



**Andreas Sporrer**  
(Product Trainer, Einhell Germany AG)

The Einhell universal saw is now my favorite tool. I'm more and more impressed with its versatility across a whole range of applications. In the garden for thinning out trees and shrubs, for the carpentry work I needed to do when I built a treehouse for my son - new uses for it seem to turn up pretty much every day.

I'm hoping there'll be a toy version soon for my son so that he can add such a great piece of kit to his collection.



CORDLESS PENDULUM JIGSAW

# TE-JS 18 Li

SOLO



Battery pack

Bevel cuts, max.

Blade speed

Cutting depth (wood/plastic/steel)

Pendulum action

Stroke height

Standard accessories

Compatible with Power X-Change

47°

0 – 2400 min<sup>-1</sup>

80 / 12 / 10 mm

4 levels (3 + 0)

25 mm

Parallel guide, attachable cutting line guide, dust extraction adapter, chip guard

Net weight | gross weight

1.8 kg | 2.3 kg

Packing dimensions

238 x 90 x 227 mm

Packaging unit

5

Article number

43.212.00

EAN code



DE: rating "Very good"



Einhell Germany AG



FAMILY



BOOSTED BY  
**TWIN PACK®**  
2 x 18 V = 36 V SUPERPOWER



Special stroke makes exact or particularly fast cuts possible



Universal saw blade holder / tool-free saw blade change



Perfect view of the workpiece: Dust blow-off function and LED lamp



Plastic insert greatly reduces splintering on the workpiece surface

You will find an extensive range of saw blades and other accessories at:



[www.kwb.eu](http://www.kwb.eu)



# JIGSAW TC-JS 60



|                                    |                                      |
|------------------------------------|--------------------------------------|
| Mains connection                   | 230 V ~ 50 Hz                        |
| Power rating                       | 410 W                                |
| Bevel cuts, max.                   | 45°                                  |
| Blade speed                        | 500 – 3000 min <sup>-1</sup>         |
| Cutting depth (wood/plastic/steel) | 60 / 10 / 6 mm                       |
| Pendulum action                    | –                                    |
| Stroke height                      | 18 mm                                |
| Standard accessories               | 1 saw blade, dust extraction adapter |
| Net weight   gross weight          | 1.6 kg   1.9 kg                      |
| Packing dimensions                 | 240 x 75 x 210 mm                    |
| Packaging unit                     | 10                                   |
| Article number                     | 43.211.17                            |
| EAN code                           |                                      |

# PENDULUM JIGSAW TC-JS 80



DE: price/performance "Good – Very good"



|                                    |  |
|------------------------------------|--|
| Mains connection                   | 230 V ~ 50 Hz  |
| Power rating                       | 600 W  |
| Bevel cuts, max.                   | 45°  |
| Blade speed                        | 800 – 3000 min <sup>-1</sup>                         |
| Cutting depth (wood/plastic/steel) | 80 / 20 / 10 mm                                      |
| Pendulum action                    | 4 levels (3 + 0)                                     |
| Stroke height                      | 18 mm  |
| Standard accessories               | 1 saw blade, parallel guide, dust extraction adapter |
| Net weight   gross weight          | 2.1 kg   2.4 kg                                      |
| Packing dimensions                 | 260 x 76 x 230 mm                                    |
| Packaging unit                     | 10   |
| Article number                     | 43.211.16  |
| EAN code                           |  |



Electronic speed control for sawing a range of materials



Versatile cutting up to 45°



Pendulum action ensures rapid sawing progress



Versatile cutting up to 45°




Clear view of cutting area



XL grip areas



Electronic speed control for sawing a range of materials

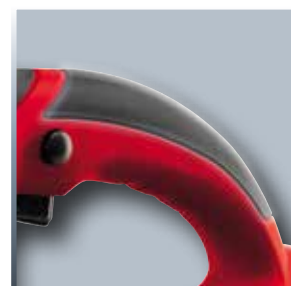

XL grip areas

# PENDULUM JIGSAW

## TH-JS 85




|                                    |   |
|------------------------------------|---|
| Mains connection                   | 230 V ~ 50 Hz   |
| Power rating                       | 620 W   |
| Bevel cuts, max.                   | 45°   |
| Blade speed                        | 800 – 3000 min <sup>-1</sup>  |
| Cutting depth (wood/plastic/steel) | 85 / 12 / 8 mm  |
| Pendulum action                    | 4 levels (3 + 0)  |
| Stroke height                      | 20 mm   |
| Standard accessories               | Parallel guide, dust extraction adapter, 1 saw blade, chip guard, removable workpiece guard, transport and storage case |
| Net weight   gross weight          | 2.0 kg   3.2 kg   |
| Packing dimensions                 | 340 x 286 x 98 mm   |
| Packaging unit                     | 6   |
| Article number                     | 43.211.40   |
| EAN code                           |   |



Blade change without tools



Adjustment without tools for bevel cuts up to 45°



Chip blower function can be switched off



Removable workpiece guard

# PENDULUM JIGSAW

## RT-JS 85



|                                    |  |
|------------------------------------|--|
| Mains connection                   | 230 V ~ 50 Hz  |
| Power rating                       | 750 W  |
| Bevel cuts, max.                   | 45°  |
| Blade speed                        | 800 – 3000 min <sup>-1</sup>                         |
| Cutting depth (wood/plastic/steel) | 85 / 12 / 8 mm                                       |
| Pendulum action                    | 4 levels (3 + 0)                                     |
| Stroke height                      | 23 mm  |
| Standard accessories               | Parallel guide, dust extractor adapter, 3 saw blades |
| Net weight   gross weight          | 2.5 kg   3.0 kg                                      |
| Packing dimensions                 | 310 x 230 x 95 mm                                    |
| Packaging unit                     | 5  |
| Article number                     | 43.210.80  |
| EAN code                           |  |



Saw blade depot



Blade change without tools



Adjustment without tools for bevel cuts up to 45°



LED lamp

# PENDULUM JIGSAW

## TE-JS 100



|                                    |  |
|------------------------------------|--|
| Mains connection                   | 230 V ~ 50 Hz  |
| Power rating                       | 750 W  |
| Bevel cuts, max.                   | 45°  |
| Blade speed                        | 800 – 3000 min <sup>-1</sup>   |
| Cutting depth (wood/plastic/steel) | 100 / 12 / 10 mm   |
| Pendulum action                    | 4 levels (3 + 0)   |
| Stroke height                      | 23 mm  |
| Standard accessories               | Parallel guide, dust extraction adapter, 1 saw blade, chip guard, cutting line guide, transport and storage case |
| Net weight   gross weight          | 2.3 kg   4.3 kg  |
| Packing dimensions                 | 415 x 310 x 100 mm   |
| Packaging unit                     | 5  |
| Article number                     | 43.211.60  |
| EAN code                           |  |

# CORDLESS ALL-PURPOSE SAW

## TE-AP 18 Li


SOLO



|                            |                                |
|----------------------------|--------------------------------|
| Battery pack               | Compatible with Power X-Change |
| Blade speed                | 0 – 2600 min <sup>-1</sup>     |
| Cutting depth (wood/steel) | 100 / 6 mm                     |
| Pendulum action            | –                              |
| Stroke height              | 22 mm                          |
| Saw blade thickness        | 0.6 – 1.6 mm                   |
| Standard accessories       | 1 saw blade (wood)             |
| Net weight   gross weight  | 1.7 kg   2.0 kg                |
| Packing dimensions         | 410 x 80 x 160 mm              |
| Packaging unit             | 6                              |
| Article number             | 43.263.00                      |
| EAN code                   |                                |



Removable cutting line guide

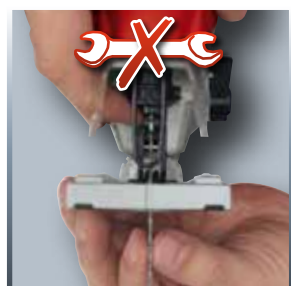

Universal blade holder without tools



Adjustment without tools for bevel cuts up to 45°




LED lamp



For universal use in gardens, workshops and on building sites



The unrivaled Triathlon motor – power, speed and endurance

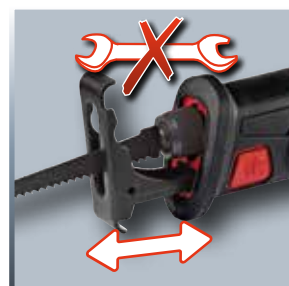


No tools required to change saw blade and adjust soleplate




ALL-PURPOSE SAW  
**TC-AP 650 E**




|                            |  |
|----------------------------|--|
| Mains connection           | 230 – 240 V ~ 50 Hz  |
| Power rating               | 650 W  |
| Blade speed                | 500 – 3000 min <sup>-1</sup>   |
| Cutting depth (wood/steel) | 150 / 10 mm  |
| Pendulum action            | -  |
| Stroke height              | 20 mm  |
| Saw blade thickness        | 0.5 – 1.4 mm   |
| Standard accessories       | 1 saw blade (wood)   |
| Net weight   gross weight  | 2.8 kg   3.2 kg  |
| Packing dimensions         | 490 x 180 x 80 mm  |
| Packaging unit             | 5  |
| Article number             | 43.261.41  |
| EAN code                   | <br>4 006825 585292 |

ALL-PURPOSE SAW  
**TE-AP 1050 E**




|                            |  |
|----------------------------|--|
| Mains connection           | 230 V ~ 50 Hz  |
| Power rating               | 1050 W   |
| Blade speed                | 0 – 2700 min <sup>-1</sup>   |
| Cutting depth (wood/steel) | 200 / 20 mm  |
| Pendulum action            | 2 levels (1 + 0)   |
| Stroke height              | 29 mm  |
| Saw blade thickness        | 0.8 – 1.5 mm   |
| Standard accessories       | 1 saw blade (wood)   |
| Net weight   gross weight  | 3.8 kg   4.6 kg  |
| Packing dimensions         | 545 x 235 x 98 mm  |
| Packaging unit             | 4  |
| Article number             | 43.261.35  |
| EAN code                   | <br>4 006825 575354 |



Electronic stroke speed control



Ergonomic, slim design with soft grip



With pendulum action for rapid progress



Flexible due to turnable head



Blade change without tools



Toolless soleplate adjustment  
for optimum blade use



Blade change without tools



Toolless soleplate adjustment  
for optimum blade use

CORDLESS HAND-HELD CIRCULAR SAW

# TE-CS 18 Li

SOLO

**NEW!**



CE

**POWER X CHANGE**

|                      |  |
|----------------------|--|
| Battery pack         | Compatible with Power X-Change                 |
| Idling speed         | 4200 min <sup>-1</sup>                         |
| Saw blade            | 150 x 10 mm                                    |
| Number of teeth      | 24   |
| Cutting depth 90°    | 48 mm  |
| Cutting depth 45°    | 32 mm  |
| Standard accessories | Parallel guide, key for changing the saw blade |

Net weight | gross weight

n/a

Packing dimensions

570 x 345 x 225 mm

Packaging unit

2

Article number

43.312.00

EAN code



4 006825 612394



Simple, tool-free adjustment of cut depth and angle



High-grade LED light



Compact, handy and ergonomic design



Compatible with Einhell guide rail system

**POWER X CHANGE**

**FAMILY**



BOOSTED BY  
**TWIN PACK®**  
2 x 18 V = 36 V SUPERPOWER

# MINI HAND-HELD CIRCULAR SAW

## TC-CS 860/1 KIT

WITH GUIDE RAIL



|                           |   |
|---------------------------|---|
| Mains connection          | 230 – 240 V ~ 50 Hz   |
| Power rating              | 450 W   |
| Idling speed              | 6000 min <sup>-1</sup>  |
| Cutting depth             | 23 mm   |
| Saw blades                | Ø 85 x Ø 10 mm  |
| Standard accessories      | Three-part guide rail (1.2 m),<br>2 saw blades (wood/plastic),<br>1 diamond cutting wheel (tiles),<br>key for changing the saw blade,<br>dust extraction adapter, parallel<br>guide, transport and storage case |
| Net weight   gross weight | 2.0 kg   3.6 kg   |
| Packing dimensions        | 370 x 133 x 265 mm  |
| Packaging unit            | 4   |
| Article number            | 43.309.93   |
| EAN code                  |   |



For high-precision plunge cuts



Three-part guide rail guarantees perfect cuts



Cutting depth limit



Infinitely adjustable cutting depth



Einhell Germany AG

MINI HAND-HELD  
CIRCULAR SAW  
**TC-CS 860 KIT**  
Item identical to TC-CS 860/1 Kit,  
but without guide rail

Art. No. 43.309.92  
PU 4  
EAN code

**SAW BLADE SET**  
for TC-CS 860 Kit  
85 x 10 mm, 6 pieces (2 x wood,  
2 x timber products, 2 x tiles)

Art. No. 45.021.28  
PU 60  
EAN code







HAND-HELD CIRCULAR SAW

## TH-CS 1200/1



CE

|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 1230 W  |
| Idling speed              | 5000 min <sup>-1</sup>  |
| Cutting depth 90° / 45°   | 55 mm / 37 mm   |
| Saw blade                 | Ø 160 x Ø 16 mm, t 24   |
| Standard accessories      | Parallel guide, key for changing the saw blade  |
| Net weight   gross weight | 3.7 kg   4.5 kg   |
| Packing dimensions        | 350 x 255 x 370 mm  |
| Packaging unit            | 4   |
| Article number            | 43.309.36   |
| EAN code                  | <br>4 006825 1593297 |



Toolless cutting depth adjustment



Angular cuts of up to 45°



Ergonomic, large handle



Splitting wedge provides high level of user safety

# HAND-HELD CIRCULAR SAW

## TE-CS 165



DE: rating "Good"



|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                  |
| Power rating              | 1200 W   |
| Idling speed              | 5500 min <sup>-1</sup>                         |
| Cutting depth 90° / 45°   | 55 mm / 40 mm                                  |
| Saw blade                 | Ø 165 x Ø 16 mm, t 24                          |
| Standard accessories      | Parallel guide, key for changing the saw blade |
| Net weight   gross weight | 3.8 kg   4.8 kg                                |
| Packing dimensions        | 335 x 248 x 248 mm                             |
| Packaging unit            | 4  |
| Article number            | 43.310.10                                      |
| EAN code                  |  |



High-performance motor and special saw blade for rapid and precise cutting



Simple, tool-free adjustment of cut depth and angle



Additional ergonomic handle with soft grip



Compatible with Einhell guide rail system



Einhell Germany AG

### EINHELL GUIDE BAR SYSTEM

for TE-CS 165 and TE-CS 190, 700 mm, 2 pieces




Art. No. 45.021.15  
PU 4

EAN code



## HAND-HELD CIRCULAR SAW

## TC-CS 1400

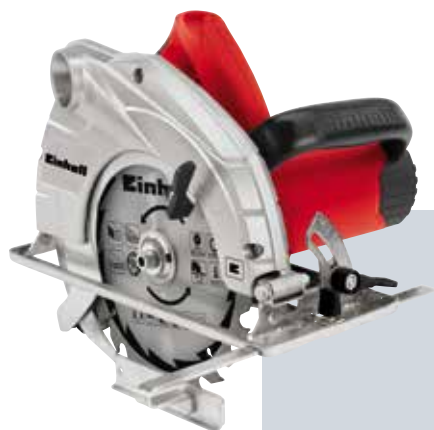

|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                  |
| Power rating              | 1400 W   |
| Idling speed              | 5200 min <sup>-1</sup>                         |
| Cutting depth 90° / 45°   | 66 mm / 45 mm                                  |
| Saw blade                 | Ø 190 x Ø 30 mm, t 24                          |
| Standard accessories      | Parallel guide, key for changing the saw blade |
| Net weight   gross weight | 4.3 kg   5.2 kg                                |
| Packing dimensions        | 355 x 255 x 270 mm                             |
| Packaging unit            | 4  |
| Article number            | 43.309.37                                      |
| EAN code                  |  |

## HAND-HELD CIRCULAR SAW

## TE-CS 190



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 1500 W  |
| Idling speed              | 5500 min <sup>-1</sup>  |
| Cutting depth 90° / 45°   | 66 mm / 48 mm   |
| Saw blade                 | Ø 190 x Ø 30 mm, t 24   |
| Standard accessories      | Parallel guide, key for changing the saw blade, dust extraction adapter |
| Net weight   gross weight | 5.2 kg   6.5 kg   |
| Packing dimensions        | 237 x 270 x 268 mm  |
| Packaging unit            | 2   |
| Article number            | 43.309.70   |
| EAN code                  |   |



Soft start



Toolless cutting depth adjustment



LED illumination of the sawing point



Additional marking of the sawing line



Ergonomic, large handle



Splitting wedge provides high level of user safety



Splitting wedge provides high level of user safety



Compatible with Einhell guide bar system



 GRINDING

## A polished performance every time.



### David Bachmeier

(Student on block release course, Einhell Germany AG)

A few weeks ago my future parents-in-law wanted to spruce up their garden furniture. I offered to do it for them with my trusty Einhell rotating sander. Exact speed setting, high surface removal rate, low dust generation – the tool is simply ideal for jobs like these!

The „restoration“ took next to no time – but it left a lasting impression on my girlfriend's parents!





## MULTIMAXX CORDLESS TE-MG 12 Li



|                           |   |
|---------------------------|---|
| Battery pack              | 12 V / 1300 mAh / Li-Ion  |
| Oscillating speed         | 10000 – 34000 min <sup>-1</sup>   |
| Abrasive paper size       | 93 x 93 x 93 mm   |
| Oscillating angle         | 3°  |
| Charging time             | 1 h   |
| Standard accessories      | Battery pack, 1h fast charger, saw blade, scraper, sanding disc, TCT cutting disc for tile gaps, 6 papers, transport and storage case |
| Net weight   gross weight | 0.8 kg   2.5 kg   |
| Packing dimensions        | 320 x 85 x 250 mm   |
| Packaging unit            | 5   |
| Article number            | 44.650.31   |
| EAN code                  | 4 006825 579284   |



Various tools for different jobs



Velcro fastening for a quick change




1h high-speed charger with  
Einhell Battery Management System



Speed control electronic



MULTIMAXX CORDLESS  
**RT-MG 10,8 Li**  
 WITH 2ND BATTERY PACK



|                           |   |
|---------------------------|---|
| Battery pack              | 10.8 V / 1300 mAh / Li-Ion  |
| Oscillating speed         | 10000 – 34000 min <sup>-1</sup>   |
| Abrasive paper size       | 93 x 93 x 93 mm   |
| Oscillating angle         | 3°  |
| Charging time             | 3 h   |
| Standard accessories      | 2nd battery pack, charger, saw blade, scraper, sanding disc, TCT cutting disc for tile gaps, 6 papers, transport and storage case |
| Net weight   gross weight | 0.8 kg   2.6 kg   |
| Packing dimensions        | 320 x 85 x 250 mm   |
| Packaging unit            | 5   |
| Article number            | 44.650.30   |
| EAN code                  |   |



Comprehensive range of accessories



Velcro fastening for a quick change



Slim design



Speed control electronic



Einhell Germany AG

**STARTER KIT**

for TE-MG 12 Li, RT-MG 10,8 Li,  
 TC-MG 220 E, TE-MG 200 CE  
 6 pieces  
 for wood and plastic, in parts for alu



Art. No. 44.650.10

PU 1

EAN code



You will find an extensive range of abrasive papers,  
 multitool and other accessories at:



www.kwb.eu



**NEW!**

MULTIMAXX


## TC-MG 220 E



|                           |   |
|---------------------------|---|
| Mains connection          | 220 - 240 V ~ 50 Hz   |
| Power rating              | 220 Watt  |
| Oscillating speed         | 11000 – 19000 min <sup>-1</sup>   |
| Abrasive paper size       | 93 x 93 x 93 mm   |
| Oscillating angle         | 3.2°  |
| Standard accessories      | Plunge-cut saw blade for wood, scraper, triangular grinding/sanding plate, 1 sanding blade, dust extraction adapter |
| Net weight   gross weight | 1.2 kg   1.7 kg   |
| Packing dimensions        | 330 x 82 x 110 mm   |
| Packaging unit            | 8   |
| Article number            | 44.650.90   |
| EAN code                  |   |

MULTIMAXX

## TE-MG 200 CE



Identical in construction to the tested RT-MG 200 E



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 200 W   |
| Oscillating speed         | 30000 – 42000 min <sup>-1</sup>   |
| Abrasive paper size       | 93 x 93 x 93 mm   |
| Oscillating angle         | 3°  |
| Standard accessories      | Saw blade (wood/plastic), scraper, sanding disc, 6 sanding blades, dust extraction adapter, transport- and storage case |
| Net weight   gross weight | 1.1 kg   2.7 kg   |
| Packing dimensions        | 350 x 105 x 277 mm  |
| Packaging unit            | 5   |
| Article number            | 44.650.40   |
| EAN code                  |   |



Speed control electronics



Softgrip



Comprehensive range of accessories



Soft start function and constant electronic speed control



Slim design



Dust extraction



Slim design




12 positions

GRINDING AND ENGRAVING TOOL

## TC-MG 135 E



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 135 W   |
| Speed                     | 10000 - 32000 min <sup>-1</sup>   |
| Oscillating circuit       | Ø 0.5 / 1.6 / 2.4 / 3.2 mm  |
| Standard accessories      | Flexible shaft 1 m, telescopic stand rod, 189 pcs. accessory set for drilling, polishing, grinding, cutting and milling, transport and storage case |
| Net weight   gross weight | 0.7 kg   2.5 kg   |
| Packing dimensions        | 340 x 218 x 125 mm  |
| Packaging unit            | 6   |
| Article number            | 44.191.69   |
| EAN code                  | <br>4 006825 585315  |



Speed control electronics



Spindle lock



Soft grip



Telescopic stand rod and flexible shaft



Einhell Germany AG

### STARTER KIT

for TE-MG 12 Li, RT-MG 10,8 Li,  
TC-MG 220 E, TE-MG 200 CE  
6 pieces  
for wood and plastic, in parts for alu



Art. No. 44.650.10

PU 1

EAN code



4 006825 553178

You will find an extensive range of abrasive papers,  
multitool and other accessories at:



[www.kwb.eu](http://www.kwb.eu)

## DELTA SANDER TC-DS 19



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 190 W   |
| Vibrations                | 20000 min <sup>-1</sup>                                     |
| Oscillating circuit       | 1.2 mm  |
| Sanding area              | 90 x 90 x 90 mm   |
| Abrasive paper size       | 93 x 93 x 93 mm   |
| Standard accessories      | 3 abrasive papers (P60, P80, P120), dust extraction adapter |
| Net weight   gross weight | 1.1 kg   1.2 kg   |
| Packing dimensions        | 315 x 100 x 105 mm  |
| Packaging unit            | 10  |
| Article number            | 44.642.35   |
| EAN code                  |   |

## DELTA SANDER TE-DS 20 E



DE: rating "Very good"



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 200 W   |
| Vibrations                | 13000 – 20000 min <sup>-1</sup>                                   |
| Oscillating circuit       | 2.0 mm  |
| Sanding area              | 90 x 90 x 90 mm   |
| Abrasive paper size       | 93 x 93 x 93 mm   |
| Standard accessories      | 10 abrasive papers (5 x P 80, 5 x P 120), dust extraction adapter |
| Net weight   gross weight | 1.2 kg   1.5 kg   |
| Packing dimensions        | 350 x 108 x 95 mm   |
| Packaging unit            | 10  |
| Article number            | 44.642.50   |
| EAN code                  |   |



Velcro fastening for a quick change



Ergonomic, slim design



Perfect ergonomics and low vibrations



Soft grip



Long durability



Incl. 3 abrasive papers



With Velcro fastening  
for standard abrasive paper



Speed control electronic



# CORDLESS MULTI SANDER

## TE-OS 18 Li

SOLO



|                           |   |
|---------------------------|---|
| Battery pack              | Compatible with Power X-Change                                |
| Vibrations                | 24000 min <sup>-1</sup>                                       |
| Oscillating circuit       | 1.6 mm  |
| Sanding area              | 104 cm <sup>2</sup>   |
| Abrasive paper size       | 150 x 150 x 100 mm  |
| Standard accessories      | 6 abrasive paper (3x 120 K, 3x 240 K), dust extractor adapter |
| Net weight   gross weight | 0.8 kg   1.1 kg   |
| Packing dimensions        | 240 x 110 x 144 mm  |
| Packaging unit            | 8   |
| Article number            | 44.607.10   |
| EAN code                  |   |

# MULTI SANDER

## TH-OS 1016



|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                |
| Power rating              | 100 W  |
| Vibrations                | 24000 min <sup>-1</sup>                      |
| Oscillating circuit       | 1.6 mm                                       |
| Sanding area              | 104 cm <sup>2</sup>                          |
| Abrasive paper size       | 150 x 150 x 100 mm                           |
| Standard accessories      | 1 abrasive paper (P120), dust collection bag |
| Net weight   gross weight | 1.0 kg   1.1 kg                              |
| Packing dimensions        | 200 x 140 x 120 mm                           |
| Packaging unit            | 10   |
| Article number            | 44.606.10                                    |
| EAN code                  |  |



With "Extreme Fix" Velcro fastening for quick and secure fastening of abrasive paper



Soft grip molded to the palm of the hand



Velcro fastening for a quick change



Perfect ergonomics



Efficient dust extractor and filter box for added cleanliness



Robust solid metal impeller for smooth and quiet action




Practical design for multiple applications




Low-dust operation

MULTI SANDER  
**TE-OS 1320**

MULTI SANDER  
**RT-OS 13 Kit**




CE

|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz  |
| Power rating              | 130 W  |
| Vibrations                | 24000 min <sup>-1</sup>  |
| Oscillating circuit       | 2.0 mm   |
| Sanding area              | 104 cm <sup>2</sup>  |
| Abrasive paper size       | 150 x 150 x 100 mm   |
| Standard accessories      | 3 abrasive papers (P120), dust collection box  |
| Net weight   gross weight | 1.2 kg   1.5 kg  |
| Packing dimensions        | 235 x 112 x 145 mm   |
| Packaging unit            | 10   |
| Article number            | 44.605.60  |
| EAN code                  | <br>4 006825 573169 |



TUV GS CE

|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz  |
| Power rating              | 130 W  |
| Vibrations                | 24000 min <sup>-1</sup>  |
| Oscillating circuit       | 2.0 mm   |
| Sanding area              | 104 cm <sup>2</sup>  |
| Abrasive paper size       | 150 x 150 x 100 mm   |
| Standard accessories      | 50 abrasive papers, dust extractor adapter, dust collection box with filter                              |
| Net weight   gross weight | 1.2 kg   1.8 kg  |
| Packing dimensions        | 235 x 145 x 140 mm   |
| Packaging unit            | 10   |
| Article number            | 44.605.65  |
| EAN code                  | <br>4 006825 598520 |



With Velcro fastening for standard abrasive paper



Perfect ergonomics



Perfect ergonomics



Dust collection box with filter



Dust collection box with filter



Soft grip and cable clip



With Velcro fastening for standard abrasive paper



Soft grip and cable clip

# MULTI SANDER RT-XS 28



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 280 W   |
| Vibrations                | 0 – 20000 min <sup>-1</sup>   |
| Oscillating circuit       | 2.0 mm  |
| Sanding area              | Eccentric: Ø 125 mm<br>Rectangle: 140 x 115 mm<br>Delta: 174 x 105 mm                                       |
| Standard accessories      | Sanding disc (eccentric, delta, rectangle), 16 abrasive papers, dust extractor adapter, dust collection box |
| Net weight   gross weight | 2.3 kg   2.8 kg   |
| Packing dimensions        | 330 x 125 x 200 mm  |
| Packaging unit            | 8   |
| Article number            | 44.191.30   |
| EAN code                  |   |



Changeable sanding disc



Speed control electronics



Dust collection box with filter




Adjustable additional handle



Einhell Germany AG

## ABRASIVE PAPER-SET

for RT-XS 28  
20 pieces



Art. No. 44.602.80  
PU 1

EAN code



You will find an extensive range of abrasive papers, multitool and other accessories at:




[www.kwb.eu](http://www.kwb.eu)





## ORBITAL SANDER TC-OS 1520



DE: price/performance "Good – Very good"



|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                    |
| Power rating              | 150 W  |
| Vibrations                | 23000 min <sup>-1</sup>                          |
| Oscillating circuit       | 2.0 mm   |
| Sanding area              | 90 x 187 mm                                      |
| Abrasive paper size       | 93 x 230 mm (93 x 187 with Velcro)               |
| Standard accessories      | 3 abrasive papers (P120), dust extractor adapter |
| Net weight   gross weight | 1.1 kg   1.4 kg                                  |
| Packing dimensions        | 270 x 160 x 100 mm                               |
| Packaging unit            | 10   |
| Article number            | 44.606.40  |
| EAN code                  | 4 006825 593693                                  |



Universal paper-fixing system



XL grip areas



Compact easy-to-use design



Incl. dust extraction adapter

Note: For safe handling of the products please refer to the instructions in the operating manual.

## ORBITAL SANDER TE-OS 2520 E



|                      |  |
|----------------------|--|
| Mains connection     | 230 V ~ 50 Hz  |
| Power rating         | 250 W  |
| Vibrations           | 14000 - 24000 min <sup>-1</sup>  |
| Oscillating circuit  | 2.0 mm   |
| Sanding area         | 115 x 230 mm   |
| Abrasive paper size  | 115 x 280 mm (115 x 230 with Velcro)                                     |
| Standard accessories | 1 abrasive paper (P120), dust collection box, transport and storage case |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 2.3 kg   3.7 kg    |
| Packing dimensions        | 430 x 139 x 255 mm |
| Packaging unit            | 4                  |

Article number 44.606.20

EAN code



## ORBITAL SANDER RT-OS 30



|                      |  |
|----------------------|--|
| Mains connection     | 230 V ~ 50 Hz  |
| Power rating         | 300 W  |
| Vibrations           | 14000 – 22000 min <sup>-1</sup>                                      |
| Oscillating circuit  | 2.0 mm   |
| Sanding area         | 115 x 227 mm   |
| Abrasive paper size  | 115 x 280 mm (115 x 230 with Velcro)                                 |
| Standard accessories | 1 abrasive paper (P120), dust extractor adapter, dust collection box |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 2.4 kg   2.9 kg    |
| Packing dimensions        | 348 x 193 x 118 mm |
| Packaging unit            | 6                  |

Article number 44.605.50

EAN code



Universal paper-fixing system



Robust aluminum sole plate



Speed control electronics



Dust collection box with filter



Compact easy-to-use design



Dust collection box with filter



Fixation with/without Velcro fastening



Softgrip and cable clip



ECCENTRIC SANDER  
**TC-RS 38 E**



|                           |                                       |
|---------------------------|---------------------------------------|
| Mains connection          | 230 V ~ 50 Hz                         |
| Power rating              | 380 W                                 |
| Vibrations                | 12000 – 26000 min <sup>-1</sup>       |
| Oscillating circuit       | 2.0 mm                                |
| Sanding area              | Ø 125 mm                              |
| Abrasive paper size       | Ø 125 mm                              |
| Standard accessories      | Dust collection bag, 1 abrasive paper |
| Net weight   gross weight | 2.0 kg   2.2 kg                       |
| Packing dimensions        | 305 x 123 x 188 mm                    |
| Packaging unit            | 10                                    |
| Article number            | 44.621.65                             |
| EAN code                  |                                       |

ECCENTRIC SANDER  
**TE-RS 40 E**



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz                                   |
| Power rating              | 400 W   |
| Vibrations                | 12000 - 24000 min <sup>-1</sup>                 |
| Oscillating circuit       | 2.5 mm  |
| Sanding area              | Ø 125 mm  |
| Abrasive paper size       | Ø 125 mm  |
| Standard accessories      | Dust collection box, transport and storage case |
| Net weight   gross weight | 2.1 kg   3.7 kg                                 |
| Packing dimensions        | 437 x 148 x 260 mm                              |
| Packaging unit            | 4   |
| Article number            | 44.620.00                                       |
| EAN code                  |   |



Simple and fast sandpaper attachment



Large, ergonomic handle surfaces for comfort



Speed control electronics



Dust collection box with filter



Practical dust catch bag for maximum cleanliness



Rotary motion achieves a high rate of material removal



Durable sturdy construction



Rotary motion achieves a high rate of material removal



BELT SANDER  
**TC-BS 8038**




|                           |  |
|---------------------------|--|
| Mains connection          | 230 V ~ 50 Hz                                |
| Power rating              | 800 W  |
| Belt speed                | 380 m/min                                    |
| Sanding area              | 76 x 142 mm                                  |
| Sanding belt size         | 76 x 533 mm                                  |
| Standard accessories      | 1 sanding belt (P80),<br>dust collection bag |
| Net weight   gross weight | 3.4 kg   3.7 kg                              |
| Packing dimensions        | 370 x 155 x 173 mm                           |
| Packaging unit            | 6  |
| Article number            | 44.662.60                                    |
| EAN code                  |  |

BELT SANDER  
**TE-BS 8540 E**



|                           |   |
|---------------------------|---|
| Mains connection          | 230 V ~ 50 Hz   |
| Power rating              | 850 W   |
| Belt speed                | 300 – 400 m/min   |
| Sanding area              | 75 x 140 mm   |
| Sanding belt size         | 75 x 533 mm   |
| Standard accessories      | 1 sanding belt (P80), dust box,<br>dust extractor adapter |
| Net weight   gross weight | 3.1 kg   3.8 kg   |
| Packing dimensions        | 414 x 175 x 176 mm  |
| Packaging unit            | 4   |
| Article number            | 44.662.30   |
| EAN code                  |   |



Easy, tool-free belt change



Precise belt adjustment



Variable belt speed



Folding front cover



Ergonomically designed for a secure hold



Rotary motion achieves a high rate of material removal



Adjustable additional handle




Dust collection box with filter



## DRYWALL POWER SANDER

# TC-DW 225




|                            |   |
|----------------------------|---|
| Mains connection           | 230 - 240 V ~ 50 Hz   |
| Power rating               | 600 W   |
| Speed                      | 600 – 1500 min <sup>-1</sup>  |
| Abrasive paper size        | Ø 225 mm  |
| Length                     | 110 cm – 165 cm   |
| Hose length   cable length | 4.0 m   4.0 m   |
| Standard accessories       | 6 sanding discs, transport and storage case   |
| Net weight   gross weight  | 3.2 kg   10.0 kg  |
| Packing dimensions         | 680 x 215 x 335 mm  |
| Packaging unit             | 2   |
| Article number             | 42.599.30   |
| EAN code                   |  |



Movable grinding head – adjusts to any pitch and angle



Long handle with tool-free telescopic action – carrying out work on high walls is no problem

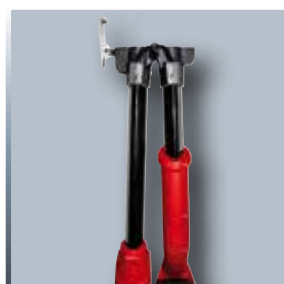

Collapsible long handle – folded in for storage and folded out ready for use in an instant



Stand specially designed to prevent kinks from forming in the suction hose

Note: For safe handling of the products please refer to the instructions in the operating manual.

**NEW!**

## CORDLESS TACKER TC-CT 3,6 Li



CE

|                           |  |
|---------------------------|--|
| Battery pack              | 3.6 V / 1300 mAh / Li-Ion                      |
| Shots per minute          | 30   |
| Staple length             | 6 - 14 mm                                      |
| Staple type               | 53   |
| Staple thickness          | 0.75 mm  |
| Staple width              | 11.4 mm  |
| Charging time             | 3 - 5 h  |
| Standard accessories      | Incl. 1000 staples, battery charger, metal box |
| Net weight   gross weight | 0.9 kg   1.5 kg                                |
| Packing dimensions        | 189 x 184 x 131 mm                             |
| Packaging unit            | 6  |
| Article number            | 42.578.80                                      |
| EAN code                  |  |



Integrated lithium-ion battery



A safety lug ensures that staples are released only in working position



Ergonomic handle with soft grip




Well visible magazine level indication



Einhell Germany AG

### ABRASIVE PAPER SET

for TC-DW 225  
10 pieces



Art. No. 42.599.21

PU 1

EAN code



4 006825 607673

### STAPLES, TYPE 53

for TC-CT 3.6 Li  
1000 pieces, 11.4 x 8 mm

**NEW!**



Art. No. 41.378.84

PU 1

EAN code



4 006825 610130





## HOT AIR GUN TC-HA 2000/1



CE


|                           |  |
|---------------------------|--|
| Mains connection          | 230 / 240 V ~ 50 Hz  |
| Power rating              | max. 2000 W  |
| Air flow   temperature    | 1st setting: 300 l/min   350 °C<br>2nd setting: 500 l/min   550 °C |
| Standard accessories      | Wide jet nozzle, reducer nozzle                                    |
| Net weight   gross weight | 0.7 kg   0.9 kg  |
| Packing dimensions        | 240 x 82 x 240 mm  |
| Packaging unit            | 10   |
| Article number            | 45.201.84  |
| EAN code                  | 4 006825 602227  |



Safe operation thanks to overheating guard



Safe stand in case of stationary operation

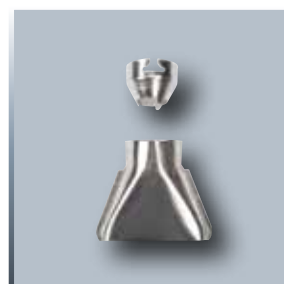

Including wide jet nozzle, reducer nozzle



With two-step switch  
(2 heat settings / 2 air settings)

## HOT AIR GUN TH-HA 2000/1



|                           |  |
|---------------------------|--|
| Mains connection          | 230 / 240 V ~ 50 Hz  |
| Power rating              | max. 2000 W  |
| Air flow   temperature    | 1st setting: 300 l/min   350 °C<br>2nd setting: 500 l/min   550 °C |
| Standard accessories      | 4 nozzles, 1 paint scraper, transport and storage case             |
| Net weight   gross weight | 0.7 kg   1.6 kg  |
| Packing dimensions        | 296 x 85 x 272 mm  |
| Packaging unit            | 10   |
| Article number            | 45.201.79  |
| EAN code                  |  |

## HOT AIR GUN TE-HA 2000 €



|                           |  |
|---------------------------|--|
| Mains connection          | 220 – 240 V ~ 50 Hz  |
| Power rating              | max. 2000 W  |
| Air flow   temperature    | 1st setting: 250 l/min   50 °C<br>2nd setting: 250 l/min   50 – 550 °C<br>3rd setting: 500 l/min   50 – 550 °C                 |
| Standard accessories      | 4 nozzles (1x reflector nozzle, 1x wide jet nozzle, 1x reducer nozzle, 1x glass protection nozzle), transport and storage case |
| Net weight   gross weight | 0.9 kg   2.2 kg  |
| Packing dimensions        | 358 x 112 x 280 mm   |
| Packaging unit            | 5  |
| Article number            | 45.201.95  |
| EAN code                  |  |



Safe operation thanks to overheating guard



Safe stand in case of stationary operation



Safe stand in case of stationary operation



Cold setting – for faster nozzle change



Wide range of accessories



With two-step switch  
(2 heat settings / 2 air settings)



Temperature display with adjustment dial



Wide range of accessories



# WOODWORKING

## Cut clean through the wood.



### Andreas Sporrer

(Product trainer, Einhell Germany AG)

The wide range of Einhell bench-type circular saws and crosscut and miter saws did not make for an easy choice. Finally, though, I opted for the handy TE-SM 2131 Dual and am perfectly happy with it. Optimum performance, ideal adjustment options, clean work results - that's what I expect from a good machine. And that's what made the treehouse for my son a luxury apartment!





# **STATIONARY SAWS FROM EINHELL**

## THE RIGHT TOOL FOR EVERY JOB!



**Horizontal miter cuts**  
**Vertical miter cuts**  
**Edging**  
**Parallel cutting**  
**Crosscutting**

## CROSSCUT AND MITER SAWS

The right tool for every project...

Einhell crosscut saws provide impressive saw blade quality. They make the cut with ease in all DIY applications. Einhell supplies crosscut and miter saws and crosscut and miter saws with drag function that make short work of even wide workpieces.



Crosscut and miter saws with drag function

Crosscut and miter saws

... and all with optimum features!

The large selection of crosscut and miter saws with or without drag function has the right machine for everyone. And all of them come with...

### Workpiece support or X-Tend

Secure support for longer workpieces: specially shaped metal rail or Einhell's own X-Tend aluminum supports with one-handed operation.



### Angled cuts on both sides

Efficient machine ergonomics get the job done quicker and easier and that includes the Einhell dual function that comes with drag, crosscut and miter saws.



### LED light and laser

Work safely, accurately and fast - even in difficult light conditions.



### Dust bag

Clean air in the workplace - the dust bag supplied with the saw helps to create a more pleasant and healthier environment. Connections to the extractor system are always provided.



## BENCH-TYPE CIRCULAR SAWS

The right tool for every project ...

Einhell saws meet every DIY enthusiast's needs and cover an extremely wide range of applications: The Einhell range provides semi-stationary bench-type circular saws, bench-type circular saws with a base frame, format circular saws and bench-type circular saws with or without AC connection and handy accessories such as a slide and equipment for extracting dust and chips.



Semi-stationary bench-type circular saws

Bench-type circular saws (with or without AC connection)

Bench-type circular saw with format function

Bench-type circular saws with base frame

... and all with optimum features!

The large selection of Einhell bench-type circular saws has the perfect machine for any project. And all of them come with ...

### Performance-optimized motors

Optimum performance for every type of saw. Delivering the power reserves needed for every project.



### Maximum work area ...

... and a minimum transport size. Einhell saws go large for working and shrink for transport and storage.



### Ideal adjustment options ...

... for all designated applications. Clean and safe cuts in any application.



### Dust extraction

The ability to extract dust directly at the machine with a wet and dry vacuum cleaner provides for a clean and safe workplace.





## CROSSCUT AND MITRE SAW WITH TABLE

# TC-MS 2112 T



CE

|                           |                        |
|---------------------------|------------------------|
| Mains voltage             | 230 V ~ 50 Hz          |
| Rating                    | 1200 W S1              |
| Speed                     | 4500 min <sup>-1</sup> |
| TCT saw blade             | Ø 210 x Ø 30 mm        |
| Number of teeth           | 24                     |
| Swiveling range           | -45° to +45°           |
| Mitre cut                 | 0° to +45° to the left |
| Max. cutting width        | 120 x 55 mm (at 90°)   |
| Net weight   gross weight | 11.0 kg   14.2 kg      |
| Packing dimensions        | 425 x 405 x 305 mm     |
| Packaging unit            | 1                      |
| Article number            | 43.003.17              |
| EAN code                  | 4 006825 584950        |



2 in 1: Crosscut saw and bench-type circular saw function



Precise angular cuts



Variable cutting height



TCT saw blade in professional quality



# CROSSCUT AND MITER SAW WITH TABLE

## TC-MS 2513 T



Einhell Germany AG



|                           |                        |
|---------------------------|------------------------|
| Mains voltage             | 230 V ~ 50 Hz          |
| Rating                    | 1800 W S1              |
| Speed                     | 4500 min <sup>-1</sup> |
| TCT saw blade             | Ø 250 x Ø 30 mm        |
| Number of teeth           | 36                     |
| Swiveling range           | -45° to +45°           |
| Mitre cut                 | 0° to +45° to the left |
| Max. cutting width        | 130 x 75 mm (at 90°)   |
| Net weight   gross weight | 13.5 kg   15.5 kg      |
| Packing dimensions        | 545 x 470 x 375 mm     |
| Packaging unit            | 1                      |
| Article number            | 43.003.45              |
| EAN code                  | 4 006825 584967        |



2 in 1: Crosscut saw and bench-type circular saw function



Precise angular cuts



Variable cutting height



TCT saw blade in professional quality

You will find an extensive range of saw blades and other accessories at:



[www.kwb.eu](http://www.kwb.eu)





MITRE SAW

## TC-MS 2112



CE

|                    |                        |
|--------------------|------------------------|
| Mains voltage      | 230 V ~ 50 Hz          |
| Rating             | 1600 W S6 40%          |
| Speed              | 5000 min <sup>-1</sup> |
| TCT saw blade      | Ø 210 x Ø 30 mm        |
| Number of teeth    | 48                     |
| Swiveling range    | -45° to +45°           |
| Mitre cut          | 0° to 45° to the left  |
| Max. cutting width | 120 x 55 mm (at 90°)   |

Net weight | gross weight

7.4 kg | 8.7 kg

Packing dimensions

480 x 320 x 290 mm


Packaging unit

1

Article number

43.002.95

EAN code



Precise angular cuts



Secure fastening of the workpieces



Easy saw blade change




TCT saw blade in professional quality

## MITRE SAW TE-MS 2112 L



|                           |                        |
|---------------------------|------------------------|
| Mains voltage             | 230 V ~ 50 Hz          |
| Rating                    | 1400 W S6 20%          |
| Speed                     | 5000 min <sup>-1</sup> |
| TCT saw blade             | Ø 210 x Ø 30 mm        |
| Number of teeth           | 48                     |
| Swiveling range           | -47° bis +47°          |
| Mitre cut                 | 0° to 45° to the left  |
| Max. cutting width        | 120 x 60 mm (at 90°)   |
| Net weight   gross weight | 8.7 kg   10.3 kg       |
| Packing dimensions        | 540 x 380 x 340 mm     |
| Packaging unit            | 1                      |
| Article number            | 43.008.40              |
| EAN code                  |                        |



Precise angular cuts



Includes laser and LED illumination of the cutting area (mains-powered)



Secure fastening of the workpieces




TCT saw blade in professional quality

## MITRE SAW TC-MS 2513 L



|                           |                        |
|---------------------------|------------------------|
| Mains voltage             | 230 V ~ 50 Hz          |
| Rating                    | 1600 W S1              |
| Speed                     | 4000 min <sup>-1</sup> |
| TCT saw blade             | Ø 250 x Ø 30 mm        |
| Number of teeth           | 48                     |
| Swiveling range           | -45° to +45°           |
| Mitre cut                 | 0° to 45° to the left  |
| Max. cutting width        | 130 x 75 mm (at 90°)   |
| Net weight   gross weight | 9.8 kg   11.1 kg       |
| Packing dimensions        | 535 x 400 x 410 mm     |
| Packaging unit            | 1                      |
| Article number            | 43.008.50              |
| EAN code                  |                        |



Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting



Secure fastening of the workpieces



TCT saw blade in professional quality



DRAG, CROSSCUT AND MITRE SAW

## TC-SM 2131 Dual



|                           |                        |
|---------------------------|------------------------|
| Mains voltage             | 230 V ~ 50 Hz          |
| Rating                    | 1800 W S2 5 min        |
| Speed                     | 5000 min <sup>-1</sup> |
| TCT saw blade             | Ø 210 x Ø 30 mm        |
| Number of teeth           | 48                     |
| Swiveling range           | -45° to +45°           |
| Mitre cut                 | -45° to +45°           |
| Max. cutting width        | 310 x 62 mm (at 90°)   |
| Net weight   gross weight | 11.9 kg   14.2 kg      |
| Packing dimensions        | 725 x 455 x 395 mm     |
| Packaging unit            | 1                      |
| Article number            | 43.008.35              |
| EAN code                  |                        |

DRAG, CROSSCUT AND MITRE SAW


## TE-SM 2131 Dual



|                           |                        |
|---------------------------|------------------------|
| Mains voltage             | 230 V - 240 V ~ 50 Hz  |
| Rating                    | 1600 W S6 20%          |
| Speed                     | 5000 min <sup>-1</sup> |
| TCT saw blade             | Ø 210 x Ø 30 mm        |
| Number of teeth           | 48                     |
| Swiveling range           | -47° to +47°           |
| Mitre cut                 | -45° to +45°           |
| Max. cutting width        | 310 x 65 mm (at 90°)   |
| Net weight   gross weight | 13.2 kg   16.1 kg      |
| Packaging unit            | 830 x 490 x 335 mm     |
| Packaging unit            | 1                      |
| Article number            | 43.008.60              |
| EAN code                  |                        |




Integrated drag function for wide workpieces



Precise angular cuts



Integrated drag function for wide workpieces



Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting



TCT saw blade in professional quality



Includes laser (mains-powered) for precise guidance while cutting



TCT saw blade in professional quality



DRAG, CROSSCUT AND MITRE SAW

## TC-SM 2534 Dual




|                           |                        |
|---------------------------|------------------------|
| Mains voltage             | 230 V ~ 50 Hz          |
| Rating                    | 2350 W S6 25%          |
| Speed                     | 4000 min <sup>-1</sup> |
| TCT saw blade             | Ø 250 x Ø 30 mm        |
| Number of teeth           | 48                     |
| Swiveling range           | -45° to +45°           |
| Mitre cut                 | -45° to +45°           |
| Max. cutting width        | 340 x 75 mm (at 90°)   |
| Net weight   gross weight | 16.1 kg   19.5 kg      |
| Packing dimensions        | 800 x 575 x 455 mm     |
| Packaging unit            | 1                      |
| Article number            | 43.008.25              |
| EAN code                  |                        |

DRAG, CROSSCUT AND MITRE SAW

## TE-SM 2534 Dual



|                           |                        |
|---------------------------|------------------------|
| Mains voltage             | 230 V - 240 V ~ 50 Hz  |
| Rating                    | 1800 W                 |
| Speed                     | 5100 min <sup>-1</sup> |
| TCT saw blade             | Ø 250 x Ø 30 mm        |
| Number of teeth           | 48                     |
| Swiveling range           | -47° to +47°           |
| Mitre cut                 | -45° to +45°           |
| Max. cutting width        | 310 x 90 mm (at 90°)   |
| Net weight   gross weight | 15.8 kg   18.3 kg      |
| Packaging unit            | 905 x 606 x 365 mm     |
| Packaging unit            | 1                      |
| Article number            | 43.008.70              |
| EAN code                  |                        |

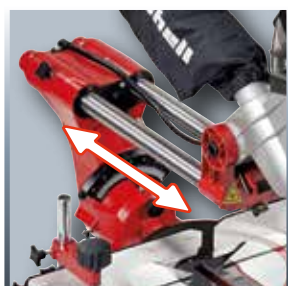

Integrated drag function for wide workpieces



Precise angular cuts



Integrated drag function for wide workpieces



Precise angular cuts



Includes laser (mains-powered)  
for precise guidance while cutting



TCT saw blade in professional quality



Includes laser (mains-powered)  
for precise guidance while cutting




TCT saw blade in professional quality

## TABLE SAW TC-TS 820



|                           |                            |
|---------------------------|----------------------------|
| Mains voltage             | 230 V ~ 50 Hz              |
| Rating                    | 800 W S2 10 min            |
| Speed                     | 2950 min <sup>-1</sup>     |
| Maximum cutting height    | 45 mm (90°), 35 mm (45°)   |
| TCT saw blade             | Ø 200 x Ø 16 mm   24 teeth |
| Swiveling range           | 0° to 45° to the left      |
| Bench size                | 500 x 335 mm               |
|                           |                            |
| Net weight   gross weight | 11.6 kg   12.7 kg          |
| Packing dimensions        | 520 x 355 x 335 mm         |
| Packaging unit            | 1                          |
| Article number            | 43.404.10                  |
| EAN code                  |                            |



Saw blade adjustment (angle)



Parallel guide with two stop heights



Saw blade adjustment (height and angle)



Parallel guide and cross stop



TCT saw blade



Chip extractor



TCT saw blade



Chip extractor

## TABLE SAW RT-TS 920



|                           |                            |
|---------------------------|----------------------------|
| Mains voltage             | 230 - 240 V ~ 50 Hz        |
| Rating                    | 900 W S1                   |
| Speed                     | 4800 min <sup>-1</sup>     |
| Maximum cutting height    | 45 mm (90°), 42 mm (45°)   |
| TCT saw blade             | Ø 205 x Ø 16 mm   24 teeth |
| Swiveling range           | 0° to 45° to the left      |
| Bench size                | 525 x 400 mm               |
|                           |                            |
| Net weight   gross weight | 14.7 kg   16.3 kg          |
| Packing dimensions        | 580 x 455 x 340 mm         |
| Packaging unit            | 1                          |
| Article number            | 43.407.32                  |
| EAN code                  |                            |

TABLE SAW  
**RT-TS 1221**  
WITH BENCH EXTENSION



|                                |                            |
|--------------------------------|----------------------------|
| Mains voltage                  | 230 - 240 V ~ 50 Hz        |
| Rating                         | 1200 W                     |
| Speed                          | 4800 min <sup>-1</sup>     |
| Maximum cutting height         | 48 mm (90°), 45 mm (45°)   |
| TCT saw blade                  | Ø 210 x Ø 30 mm   24 teeth |
| Swiveling range                | 0° bis 45° to the left     |
| Bench size (without extension) | 525 x 400 mm               |
| Bench size max.                | 525 x 620 mm               |
| Net weight   gross weight      | 13.4 kg   17.9 kg          |
| Packing dimensions             | 580 x 455 x 340 mm         |
| Packaging unit                 | 1                          |
| Article number                 | 43.407.41                  |
| EAN code                       |                            |



Saw blade adjustment (height and angle)



Bench extension



Parallel guide and cross stop individually adjustable




2in1 saw blade adjustment (height, angle 0°-45°) 2 in 1 saw blade adjustment



TCT saw blade



Chip extractor

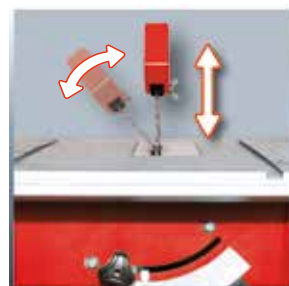

Blade height and angle are easy to adjust



Connection for vacuum extraction system Ø 36 mm

TABLE SAW  
**TC-TS 2025 eco**  
WITH BASE FRAME

**NEW!**



|                           |                            |
|---------------------------|----------------------------|
| Mains voltage             | 220 - 240 V ~ 50 Hz        |
| Rating                    | 2000 W S6 25%              |
| Speed                     | 5000 min <sup>-1</sup>     |
| Maximum cutting height    | 85 mm (90°), 48 mm (45°)   |
| TCT saw blade             | Ø 250 x Ø 30 mm   24 teeth |
| Swiveling range           | 0° bis 45° to the left     |
| Cross stop tiltable       | -60° to +60°               |
| Bench size max.           | 640 x 487 mm               |
| Net weight   gross weight | 19.7 kg   22.2 kg          |
| Packing dimensions        | 710 x 560 x 320 mm         |
| Packaging unit            | 1                          |
| Article number            | 43.405.30                  |
| EAN code                  |                            |



**NEW!**

# TABLE SAW

## TC-TS 2025 U

WITH BASE FRAME AND BENCH EXTENSION



|                        |                            |
|------------------------|----------------------------|
| Mains voltage          | 220 - 240 V ~ 50 Hz        |
| Rating                 | 2000 W S6 25%              |
| Speed                  | 5000 min <sup>-1</sup>     |
| Maximum cutting height | 85 mm (90°), 48 mm (45°)   |
| TCT saw blade          | Ø 250 x Ø 30 mm   24 teeth |
| Swiveling range        | 0° bis 45° to the left     |
| Cross stop tiltable    | -60° to +60°               |
| Bench size max.        | 640 x 487 (887) mm         |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 20.2 kg   22.7 kg  |
| Packing dimensions        | 710 x 560 x 320 mm |
| Packaging unit            | 1                  |
| Article number            | 43.405.40          |
| EAN code                  |                    |



# TABLE SAW

## TE-TS 1825 U

WITH BASE FRAME



|                        |                            |
|------------------------|----------------------------|
| Mains voltage          | 230 - 240 V ~ 50 Hz        |
| Rating                 | 1800 W S6 40%              |
| Speed                  | 6000 min <sup>-1</sup>     |
| Maximum cutting height | 75 mm (90°), 53 mm (45°)   |
| TCT saw blade          | Ø 250 x Ø 30 mm   24 teeth |
| Swiveling range        | 0° to 45° to the left      |
| Cross stop tiltable    | -60° to +60°               |
| Bench size max.        | 610 (930) x 445 (945) mm   |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 25.3 kg   27.5 kg  |
| Packing dimensions        | 730 x 590 x 360 mm |
| Packaging unit            | 1                  |
| Article number            | 43.405.60          |
| EAN code                  |                    |



Incl. parallel guide and cross stop



Blade height and angle are easy to adjust



2 in 1 saw blade adjustment (height and angle)




Optimized for wide and long workpieces



Bench width extension for wide workpieces



Practical holder for blade and tool

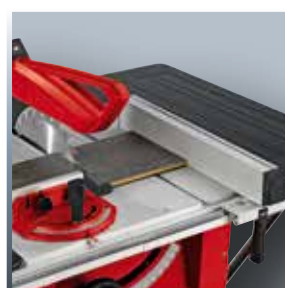

Parallel guide with eccentric clamp and additional cross stop




Extra-sturdy base frame with compensation feature for uneven floors

TABLE SAW  
WITH FORMAT FUNCTION  
**TE-CC 1825 U**  
WITH BASE FRAME



|                           |                            |
|---------------------------|----------------------------|
| Mains voltage             | 230 V ~ 50 Hz              |
| Rating                    | 1800 W S6 40%              |
| Speed                     | 4500 min <sup>-1</sup>     |
| Maximum cutting height    | 75 mm (90°), 53 mm (45°)   |
| TCT saw blade             | Ø 250 x Ø 30 mm   48 teeth |
| Swiveling range           | -2° to 47° to the left     |
| Bench size max.           | 625 x 740 (1090) mm        |
| Sliding table size        | 625 x 150 mm               |
| Slide length              | 770 mm                     |
| Net weight   gross weight | 27.1 kg   31.8 kg          |
| Packing dimensions        | 800 x 750 x 340 mm         |
| Packaging unit            | 1                          |
| Article number            | 43.405.50                  |
| EAN code                  |                            |

TABLE SAW  
**RT-TS 2031 U**  
WITH BASE FRAME

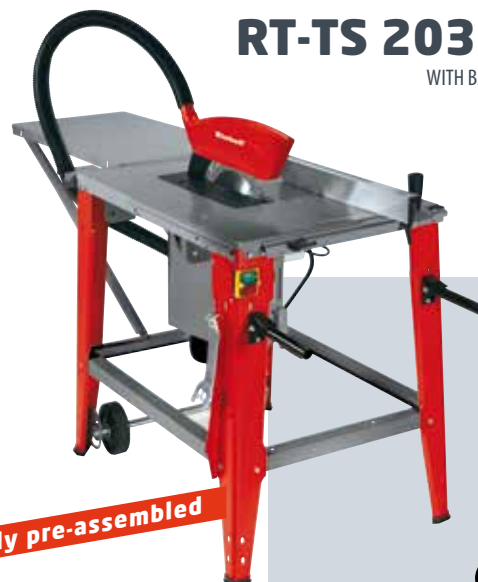


|                                      |                            |
|--------------------------------------|----------------------------|
| Mains voltage                        | 230 V ~ 50 Hz              |
| Rating                               | 2000 W S6 20%              |
| Speed                                | 2800 min <sup>-1</sup>     |
| Maximum cutting height               | 83 mm (90°), 60 mm (45°)   |
| TCT saw blade                        | Ø 315 x Ø 30 mm   24 teeth |
| Swiveling range                      | 0° to 45°                  |
| Bench size max.                      | 800 (1600) x 550 mm        |
| Machine size without bench extension | 900 x 570 x 1050 mm        |
| Net weight   gross weight            | 50.2 kg   53.5 kg          |
| Packing dimensions                   | 890 x 600 x 450 mm         |
| Packaging unit                       | 1                          |
| Article number                       | 43.071.53                  |
| EAN code                             |                            |



Operating slide for precise cross cuts



Bench extension with XXL stop bar



Saw blade adjustment (height and angle)



Multi-function stop



2 in 1 saw blade adjustment (height and angle)



Easy transport



Bench length extension



Easy transport

TABLE SAW  
**TE-TS 2231 U**  
WITH BASE FRAME



|                           |                            |
|---------------------------|----------------------------|
| Mains voltage             | 230 V ~ 50 Hz              |
| Rating                    | 2200 W S6 20%              |
| Speed                     | 2800 min <sup>-1</sup>     |
| Maximum cutting height    | 83 mm (90°), 50 mm (45°)   |
| TCT saw blade             | Ø 315 x Ø 30 mm   24 teeth |
| Swiveling range           | 0° to 45° to the left      |
| Cross stop tiltable       | -60° to +60°               |
| Bench size max.           | 800 (1450) x 550 mm        |
| Net weight   gross weight | 45.5 kg   50.0 kg          |
| Packing dimensions        | 865 x 585 x 480 mm         |
| Packaging unit            | 1                          |
| Article number            | 43.071.56                  |
| EAN code                  |                            |

TABLE SAW  
**TE-TS 2831 UD**  
WITH BASE FRAME AND THREE-PHASE CURRENT



|                           |                            |
|---------------------------|----------------------------|
| Mains voltage             | 400 V 3 ~ 50 Hz            |
| Rating                    | 2800 W S6 20%              |
| Speed                     | 2800 min <sup>-1</sup>     |
| Maximum cutting height    | 83 mm (90°), 50 mm (45°)   |
| TCT saw blade             | Ø 315 x Ø 30 mm   24 teeth |
| Swiveling range           | 0° to 45° to the left      |
| Cross stop tiltable       | -60° to +60°               |
| Bench size max.           | 800 (1450) x 550 mm        |
| Net weight   gross weight | 45.5 kg   50.0 kg          |
| Packing dimensions        | 865 x 585 x 480 mm         |
| Packaging unit            | 1                          |
| Article number            | 43.071.44                  |
| EAN code                  |                            |



Long-lasting induction motor




Robust base frame



Long-lasting induction motor with AC connection




Robust base frame



Easy transport



Complete with kwb branded carbide saw blade



Easy transport



Complete with kwb branded carbide saw blade



# SLIDE



**Slide length** 730 mm  
**Suitable accessory for** TE-TS 2231 U, TE-TS 2831 UD, RT-TS 2031 U


**Net weight | gross weight** 6.2 kg | 7.5 kg  
**Packing dimensions** 990 x 280 x 165 mm  
**Packaging unit** 1  
**Article number** 43.106.25  
**EAN code**



Expands the range of options and precision of bench-type circular saws



Easy assembly

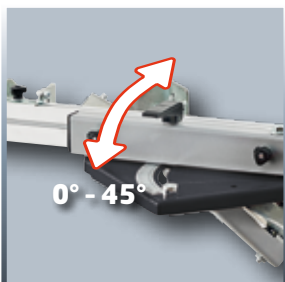

Cross stop with angle setting from 0° to 45°



Integrated limit stop for simple repeat work



Einhell Germany AG



## THE SPECIAL SAW BLADE FROM KWB

- Brand quality
- For the optimum in longitudinal cuts
- Special tooth geometry produces ultra-precise cuts
- Laser production processes support the highest standards of workmanship
- Top quality materials guarantee a long service life and a high standard of cut
- Standard accessory for TE-TS 2231 U and TE-TS 2831 UD





## STATIONARY PLANER

# TH-SP 204



CE

|                                  |  |
|----------------------------------|--|
| Mains voltage                    | 230 V ~ 50 Hz  |
| Rating                           | 1280 W   |
| Plane blade speed                | 9200 min <sup>-1</sup>   |
| Max. material removal            | 3 mm   |
| Max. working width               | 204 mm   |
| Max. height at thickness opening | 120 mm   |
| Feed speed                       | 8 m/min  |
| Max. angle of the parallel guide | 45°  |
|                                  |  |
| Net weight   gross weight        | 27.5 kg   30.2 kg  |
| Packing dimensions               | 850 x 450 x 440 mm   |
| Packaging unit                   | 1  |
| Article number                   | 44.199.50  |
| EAN code                         | <br>4 006825 588859 |



Sturdy, solid construction



Surface plane with stop for chamfering



Thickness planer with pull-out workpiece support



Dust extraction 100 mm



# BAND SAW TC-SB 200




|                           |                                 |
|---------------------------|---------------------------------|
| Mains voltage             | 230 V ~ 50 Hz                   |
| Rating                    | 250 W S2 15 min                 |
| Speed                     | 1400 min <sup>-1</sup>          |
| Blade speed               | 900 m/min                       |
| Bandsaw blade             | 1400 x 7 mm   6 teeth / 25.4 mm |
| Maximum cutting height    | 80 mm (90°)                     |
| Reach                     | 200 mm                          |
| Swiveling range           | -4° bis 46°                     |
| Table size                | 300 x 300 mm                    |
| Net weight   gross weight | 15.4 kg   17.6 kg               |
| Packing dimensions        | 370 x 720 x 280 mm              |
| Packaging unit            | 1                               |
| Article number            | 43.080.15                       |
| EAN code                  |                                 |

# SCROLL SAW TC-SS 405 €

**NEW!**



|                           |                              |
|---------------------------|------------------------------|
| Mains voltage             | 230 V ~ 50 Hz                |
| Rating                    | 120 W   S2 10 min            |
| Number of strokes         | 400 – 1600 min <sup>-1</sup> |
| Stroke height             | 14 mm                        |
| Saw blade                 | 127 mm                       |
| Maximum cutting height    | 52 mm (90°)                  |
| Reach                     | 406 mm                       |
| Swiveling range           | 0° to 45°                    |
| Table size                | 408 x 250 mm                 |
| Net weight   gross weight | 9.0 kg   10.4 kg             |
| Packing dimensions        | 647 x 302 x 326 mm           |
| Packaging unit            | 1                            |
| Article number            | 43.090.40                    |
| EAN code                  |                              |

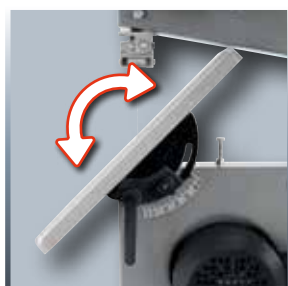

Infinitely tilting saw table



Height adjustment of blade bearings for greater sawing accuracy



Infinitely tilting machine table



Quick-release clamp makes it easy to change the saw blade




Parallel stop guide



Connection for vacuum extraction system 36 mm



Electronic blade speed controller for handling a variety of materials

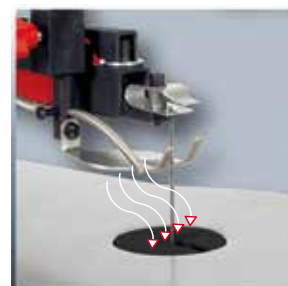

Height adjustable blow-off device





## STATIONARY BELT GRINDER

# TH-US 240



|                                  |  |
|----------------------------------|--|
| Mains voltage                    | 230 V ~ 50 Hz  |
| Rating                           | 240 W S2 30 min  |
| Speed                            | 2950 min <sup>-1</sup>   |
| Grinding wheel dimensions        | Ø 150 x Ø 12.7 x 20 mm   |
| Grinding/sanding belt dimensions | 50 x 686 mm  |
| Belt speed                       | 900 m/min.   |
|                                  |  |
|                                  |  |
|                                  |  |
|                                  |  |
|                                  |  |
|                                  |  |
| Net weight   gross weight        | 7.3 kg   8.3 kg  |
| Packing dimensions               | 410 x 350 x 230 mm   |
| Packaging unit                   | 1  |
| Article number                   | 44.661.50  |
| EAN code                         | <br>4 006825 595789 |



2 tool supports ensure maximum variability



Adjustable spark guard window for safety when working



Rubber feet for safe, low-vibration stability



Sturdy, compact design in metal

## STATIONARY BELT-DISC GRINDER

## TC-US 400




|                         |                        |
|-------------------------|------------------------|
| Mains voltage           | 230 V ~ 50 Hz          |
| Rating                  | 375 W S2 30 min        |
| Speed                   | 1450 min <sup>-1</sup> |
| Grinding wheel          | Ø 150 mm               |
| Grinding /sanding belt  | 915 x 100 mm           |
| Table incline           | 0° to 45°              |
| Cross stop swivel range | -60° to +60°           |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 12.1 kg   12.9 kg  |
| Packing dimensions        | 500 x 312 x 253 mm |
| Packaging unit            | 1                  |
| Article number            | 44.192.55          |
| EAN code                  |                    |



## WOODWORKING LATHE

## TC-WW 350

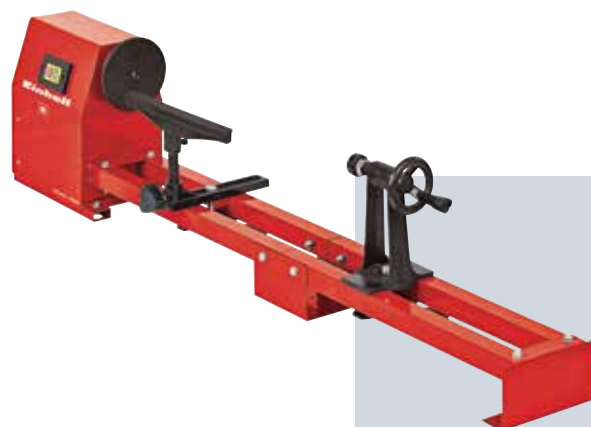

|                     |  |
|---------------------|--|
| Mains voltage       | 230 V ~ 50 Hz                              |
| Rating              | 350 W S2 15 min                            |
| Max. lathe diameter | 356 mm                                     |
| Tip width           | 1000 mm                                    |
| Spindle speed       | 810 / 1180 / 1700 / 2480 min <sup>-1</sup> |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 22.5 kg   24.2 kg  |
| Packing dimensions        | 875 x 220 x 497 mm |
| Packaging unit            | 1                  |
| Article number            | 43.121.05          |
| EAN code                  |                    |



Swiveling belt grinding/sanding device with workpiece stop




Disc grinder/sander with Velcro fastening system



Four adjustable speed settings



Tailstock with live spindle tip for securing and centering the workpiece, tool-free adjustable

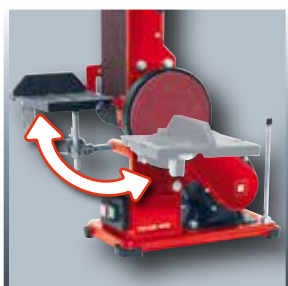

Tilting and swiveling aluminum support table, versatile usable



Connection for dust extractor for a clean workplace



Robust, tool-free adjustable tool support



Front end driver and face plate for many different applications

## BASE FRAME E-STAND



**multifunctional**

|                      |  |
|----------------------|--|
| Assembly width       | 340 – 445 mm   |
| Assembly depth       | max. 410 mm  |
| Working height       | 81 cm  |
| Can be combined with | TE-SM 2131 Dual, TE-SM 2534 Dual, TH-MS 2112, TH-MS 2513 L, TE-MS 2112 L, TH-SM 2131 Dual, TH-SM 2534 Dual, TC-MS 2112, TC-SM 2131 Dual, TC-SM 2534 Dual |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 10.4 kg   11.4 kg  |
| Packing dimensions        | 795 x 340 x 120 mm |
| Packaging unit            | 1                  |
| Article number            | 43.106.20          |
| EAN code                  |                    |



## CHIP AND DUST EXTRACTION SYSTEM RT-VE 550




CE

|                           |                        |
|---------------------------|------------------------|
| Mains voltage             | 220 - 240 V ~ 50 Hz    |
| Rating                    | 550 W S1               |
| Speed                     | 2900 min <sup>-1</sup> |
| Debris bag volume         | 65 l                   |
| Air capacity              | 1150 m <sup>3</sup> /h |
| Vacuum                    | max. 1600 Pa           |
| Dust extraction connector | Ø 100 mm / Ø 36 mm     |
| Hose length               | 2.5 m                  |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 20.0 kg   23.0 kg  |
| Packing dimensions        | 890 x 540 x 380 mm |
| Packaging unit            | 1                  |
| Article number            | 43.041.40          |
| EAN code                  |                    |



One height adjustable foot for level control



Can be used for semi-stationary machines of various sizes

**can be combined with**



Mitre saws



Table saws



Aluminium assembly rail with sliding blocks



Sturdy X-strutting apart



Bandsaws





Stationary planes



**TCT SAW BLADE**  
for RT-XM 305 U  
48 teeth | Ø 250 x Ø 30 x 2.2 mm



Art. No. 45.021.57  
PU 1  
EAN code

4 006825 563191

**TCT SAW BLADE**  
for RT-TS 920  
20 teeth | Ø 205 x Ø 16 x 2.5 mm



Art. No. 45.020.39  
PU 1  
EAN code

4 006825 456066

**TCT SAW BLADE**  
for RT-TS 920  
48 teeth | Ø 205 x Ø 16 x 2.5 mm



Art. No. 45.020.33  
PU 1  
EAN code

4 006825 456172

**TCT SAW BLADE-SET**  
for RT-SM 305 L, TC-MS 2112,  
TE-MS 2112 L, TC-SM 2131 Dual,  
TE-SM 2131 Dual, RT-TS 1221  
24 teeth | Ø 210 x Ø 30 x 2.8 mm



Art. No. 45.020.48  
PU 1  
EAN code

4 006825 456004

**TCT SAW BLADE**  
for TC-MS 2513 L, TC-SM 2534 Dual,  
TE-SM 2534 Dual, TC-TS 2025 eco,  
TC-TS 2025 U, TE-TS 1825 U,  
TE-CC 1825 U  
24 teeth | Ø 250 x Ø 30 x 3.2 mm

Art. No. 43.111.10  
PU 1  
EAN code

4 006825 431223

**TCT SAW BLADE KIT**  
for TC-TS 2025 eco, TC-TS 2025 U  
Ø 250 x Ø 30 x 3.0 mm,  
1x 24 teeth, 1x 48 teeth, 1x 60 teeth

Art. No. 45.021.33  
PU 1  
EAN code




4 006825 534276

**PROFESSIONAL  
TURNING TOOL  
SET**  
5-part, flat and round nose chisel,  
gouge chisel, round and pointed  
chisel



Art. No. 43.112.00  
PU 1  
EAN code




4 006825 431551

**TCT SAW BLADE**  
for TC-TS 820  
20 teeth | Ø 200 x Ø 16 x 2.8 mm



Art. No. 45.020.46  
PU 1  
EAN code

4 006825 453706

**TCT SAW BLADE**  
for TC-MS 2513 L,  
TC-SM 2534 Dual, TE-SM 2534 Dual,  
TC-TS 2025 eco, TC-TS 2025 U,  
TE-TS 1825 U, TE-CC 1825 U  
48 teeth | Ø 250 x Ø 30 x 3.2 mm



Art. No. 43.111.11  
PU 1  
EAN code

4 006825 431230

**TCT SAW BLADE KIT**  
for TH-MS 2112, TC-MS 2112,  
TE-MS 2112 L, TC-SM 2131 Dual,  
TE-SM 2131 Dual  
Ø 210 x Ø 30 x 2.5 mm,  
1x 24 teeth, 1x 48 teeth, 1x 60 teeth



Art. No. 45.021.32  
PU 1  
EAN code

4 006825 534269

**TCT SAW BLADE**  
for RT-SM 305 L, TC-MS 2112,  
TE-MS 2112 L, TC-SM 2131 Dual,  
TE-SM 2131 Dual, RT-TS 1221  
48 teeth | Ø 210 x Ø 30 x 2.8 mm



Art. No. 45.020.34  
PU 1  
EAN code

4 006825 456110

**TCT SAW BLADE**  
for TC-MS 2513 L, TC-SM 2534 Dual,  
TE-SM 2534 Dual, TC-TS 2025 eco,  
TC-TS 2025 U, TE-TS 1825 U,  
TE-CC 1825 U  
60 teeth | Ø 250 x Ø 30 x 3.2 mm


Art. No. 43.111.13  
PU 1  
EAN code

4 006825 503166

**TCT SAW BLADE**  
for RT-TS 2031 U, RT-TS 2231 UD,  
TE-TS 2231 U, TE-TS 2831 UD,  
RT-CC 315 U  
40 teeth | Ø 315 x Ø 30 x 3.0 mm

Art. No. 45.020.11  
PU 1  
EAN code




4 006825 456295

Further accessories from



www.kwb.eu

**SAW BAND**

for TH-SB 200, TC-SB 200  
1400 x 6.5 mm  
6 teeth / 25 mm



Art. No. 45.061.56

PU 1

EAN code



4 006825 508116

**SAW BAND**

for RT-SB 250 U  
1790 X 9.5 mm  
6 teeth / 25.4 mm



Art. No. 43.111.18

PU 1

EAN code



4 006825 568875

**SAW BAND**

for RT-SB 305 U  
2240 X 12 mm  
4 teeth / 25 mm



Art. No. 43.111.17

PU 1

EAN code



4 006825 516463

**SAW BLADE KIT**

for TH-SS 405 E, TH-SS 405 EL,  
TC-SS 405 E  
5 saw blades



Art. No. 45.062.00

PU 1

EAN code



4 006825 453928

**SPARE BLADE**

for TH-SP 204



Art. No. 43.113.10

PU 1

EAN code



4 006825 598018

**VACUUM  
ADAPTER SET**

for TH-TS 1525 U, TE-TS 1825 U,  
TH-TS 1525 U, TH-TS 1525 ECO,  
TE-CC 1825 U



Art. No. 43.106.30

PU 1


EAN code



4 006825 587715

**GRINDING/  
SANDING BELT SET**

for TH-US 240  
50 x 686 mm, 5 pieces



Art. No. 44.198.09

PU 1


EAN code



4 006825 565010

**GRINDING/  
SANDING BELT SET**

for TC-US 400  
100 x 914 mm, 3 pieces



Art. No. 44.198.30

PU 1

EAN code



4 006825 443783

**SANDPAPER SET**

for TC-US 400  
150 mm, Velcro, 3 pieces



Art. No. 44.198.45

PU 1

EAN code



4 006825 529036

Further accessories from



www.kwb.eu

**E** CLEANING SYSTEMS

**They suck up everything -  
except the money  
from your wallet!**



**Anja Herner**

(Intern. Product Management,  
Einhell Germany AG)

It used to be a real torture going round with my household vacuum cleaner, but now I'm almost professional standard. My Einhell wet and dry vacuum cleaner is ideal for work outside. And if the washing machine starts to leak inside, the Einhell vacuum cleaner gets rid of that as well, without making a fuss. In the TE-VC 1925 SA I've got a real all-rounder in the house!





ASH VACUUM CLEANER  
**TH-VC 1318**



|                           |   |
|---------------------------|---|
| Mains voltage             | 230 V ~ 50 Hz   |
| Rating                    | 500 W S1  |
| Suction power             | 130 mbar  |
| Suction hose length       | 1.0 m   |
| Tank volume               | 18 l  |
|                           |   |
|                           |   |
|                           |   |
|                           |   |
|                           |   |
|                           |   |
|                           |   |
| Net weight   gross weight | 2.9 kg   3.7 kg   |
| Packing dimensions        | 325 x 310 x 375 mm  |
| Packaging unit            | 1   |
| Article number            | 23.516.22   |
| EAN code                  |  |

ASH VACUUM CLEANER  
**TH-VC 1425**



|                           |   |
|---------------------------|---|
| Mains voltage             | 230 V ~ 50 Hz   |
| Rating                    | 700 W S1  |
| Suction power             | 140 mbar  |
| Suction hose length       | 1.0 m   |
| Tank volume               | 25 l  |
|                           |   |
|                           |   |
|                           |   |
|                           |   |
|                           |   |
|                           |   |
|                           |   |
| Net weight   gross weight | 3.8 kg   4.9 kg   |
| Packing dimensions        | 330 x 328 x 490 mm  |
| Packaging unit            | 1   |
| Article number            | 23.516.31   |
| EAN code                  |  |



Carrying handle




Fine filter



Wheels




Fine filter



Level indicator



Cable rewind



Level indicator



Cable rewind

## WET AND DRY VACUUM CLEANER

## TC-VC 1812 S



|                           |                     |
|---------------------------|---------------------|
| Mains voltage             | 220 – 240 V ~ 50 Hz |
| Rating                    | 1250 W S1           |
| Suction power             | 180 mbar            |
| Suction hose length       | 1.5 m               |
| Suction hose diameter     | 36 mm               |
| Tank volume               | 12 l                |
|                           |                     |
|                           |                     |
|                           |                     |
|                           |                     |
|                           |                     |
|                           |                     |
|                           |                     |
|                           |                     |
|                           |                     |
| Net weight   gross weight | 3.6 kg   4.4 kg     |
| Packing dimensions        | 290 x 285 x 420 mm  |
| Packaging unit            | 1                   |
| Article number            | 23.423.70           |
| EAN code                  |                     |

## WET AND DRY VACUUM CLEANER

## TH-VC 1815



|                           |                    |
|---------------------------|--------------------|
| Mains voltage             | 230 V ~ 50 Hz      |
| Rating                    | 1250 W S1          |
| Suction power             | 180 mbar           |
| Suction hose length       | 1.5 m              |
| Suction hose diameter     | 36 mm              |
| Tank volume               | 15 l               |
| Noise level               | 80 dB(A)           |
|                           |                    |
|                           |                    |
|                           |                    |
|                           |                    |
|                           |                    |
|                           |                    |
|                           |                    |
|                           |                    |
|                           |                    |
|                           |                    |
| Net weight   gross weight | 4.2 kg   5.0 kg    |
| Packing dimensions        | 330 x 330 x 440 mm |
| Packaging unit            | 1                  |
| Article number            | 23.402.90          |
| EAN code                  |                    |



Practical cable holder



Blow connector



Practical cable holder



Blow connector



Accessory mount



Wheels



Accessory mount



Wheels

WET AND DRY VACUUM CLEANER

## TH-VC 1820 S



|                           |  |
|---------------------------|--|
| Mains voltage             | 230 V ~ 50 Hz  |
| Rating                    | 1250 W S1  |
| Suction power             | 180 mbar   |
| Suction hose length       | 1.5 m  |
| Suction hose diameter     | 36 mm  |
| Tank volume               | 20 l   |
| Noise level               | 82 dB(A)   |
| Net weight   gross weight | 4.7 kg   5.6 kg  |
| Packing dimensions        | 325 x 320 x 460 mm   |
| Packaging unit            | 1  |
| Article number            | 23.421.67  |
| EAN code                  | <br>4 006825 585162 |



Practical cable holder



Blow connector



Accessory mount



Wheels

### WET AND DRY VACUUM CLEANER WITH ASH FILTER

TH-VC 1820 S KIT  
Item identical to TH-VC 1820 S,  
but with ash filter

Art. No. 23.421.75

PU 1

EAN code



4 006825 584035



# WET AND DRY VACUUM CLEANER

## TH-VC 1930 SA



|                              |                    |
|------------------------------|--------------------|
| Mains voltage                | 230 V ~ 50 Hz      |
| Rating                       | 1500 W S1          |
| Suction power                | 190 mbar           |
| Automatic socket outlet max. | 2000 W             |
| Suction hose length          | 2.5 m              |
| Suction hose diameter        | 36 mm              |
| Tank volume                  | 30 l               |
| Noise level                  | 80 dB(A)           |
| Net weight   gross weight    | 6.8 kg   8.6 kg    |
| Packing dimensions           | 400 x 390 x 550 mm |
| Packaging unit               | 1                  |
| Article number               | 23.421.90          |
| EAN code                     |                    |

# WET AND DRY VACUUM CLEANER

## TE-VC 1820



|                           |                    |
|---------------------------|--------------------|
| Mains voltage             | 230 V ~ 50 Hz      |
| Rating                    | 750 W S1           |
| Suction power             | 180 mbar           |
| Suction hose length       | 2.5 m              |
| Suction hose diameter     | 36 mm              |
| Tank volume               | 20 l               |
| Noise level               | 70 dB(A)           |
| Net weight   gross weight | 7.7 kg   9.2 kg    |
| Packing dimensions        | 355 x 364 x 524 mm |
| Packaging unit            | 1                  |
| Article number            | 23.423.41          |
| EAN code                  |                    |



Accessory mount



Blow connector



Practical cable holder



Blow connector



Water drain screw



Wheels



Accessory mount



Wheels

## WET AND DRY VACUUM CLEANER

## TE-VC 1925 SA



|                              |                    |
|------------------------------|--------------------|
| Mains voltage                | 230 V ~ 50 Hz      |
| Rating                       | 800 W S1           |
| Suction power                | 190 mbar           |
| Automatic socket outlet max. | 2600 W             |
| Suction hose length          | 3.0 m              |
| Suction hose diameter        | 36 mm              |
| Tank volume                  | 25 l               |
| Noise level                  | 72 dB(A)           |
| Net weight   gross weight    | 9.7 kg   11.6 kg   |
| Packing dimensions           | 472 x 386 x 561 mm |
| Packaging unit               | 1                  |
| Article number               | 23.423.54          |
| EAN code                     |                    |

## WET AND DRY VACUUM CLEANER

## TE-VC 2230 SA



|                              |                    |
|------------------------------|--------------------|
| Mains voltage                | 230 V ~ 50 Hz      |
| Rating                       | 1150 W S1          |
| Suction power                | 220 mbar           |
| Automatic socket outlet max. | 2250 W             |
| Suction hose length          | 3.0 m              |
| Suction hose diameter        | 36 mm              |
| Tank volume                  | 30 l               |
| Noise level                  | 74 dB(A)           |
| Net weight   gross weight    | 10.2 kg   13.1 kg  |
| Packing dimensions           | 472 x 386 x 561 mm |
| Packaging unit               | 1                  |
| Article number               | 23.423.63          |
| EAN code                     |                    |



Blow connector



Water drain screw



Trolley function



Accessory mount



Accessory mount



Wheels



Water drain screw



Comprehensive range of accessories

WET AND DRY VACUUM CLEANER

## TE-VC 2340 SA

**NEW!**




incl. synchronous start socket

HIGH QUALITY COMPONENTS  
**EXTREME DURABILITY**

ROSTFREI  
**Rost frei**  
STAINLESS-STEEL



|                              |   |
|------------------------------|---|
| Mains voltage                | 220 - 240 V ~ 50 Hz   |
| Rating                       | 1200 W  |
| Suction power                | 230 mbar  |
| Automatic socket outlet max. | 2250 W  |
| Suction hose length          | 3.0 m   |
| Suction hose diameter        | 36 mm   |
| Tank volume                  | 40 l  |
| Noise level                  | 74 db(A)  |
| Net weight   gross weight    | 12.0 kg   14.2 kg   |
| Packing dimensions           | 465 x 376 x 752 mm  |
| Packaging unit               | 1   |
| Article number               | 23.423.80   |
| EAN code                     |  |



Blow connector for blow-cleaning of hard-to-reach areas



Water drain screw for emptying the tank



Practical accessories holder for neat storage



Practical cable holder for neat storage



Einhell Germany AG





## ECO-POWER

### Technical know-how for the well-being of our environment

Each of us is responsible for the environment in which we live. With know-how and technology we want to make efficient use of energy. ECO Power stands for the use of efficient technology. We exploit every possibility for appreciably improving the ratio of energy input and yield in all our products.

- ECO-Power stands for:**
- Optimised energy efficiency – high performance with low energy consumption
  - Intelligent, technically sophisticated product development
  - High-quality components
  - Well-conceived product design

- Extreme Durability:**
- High-quality components
  - First-class workmanship
  - Long life – guaranteed!

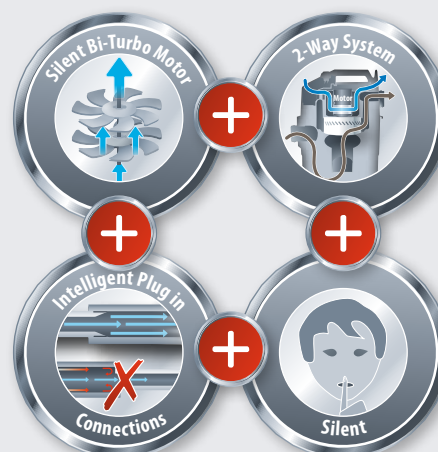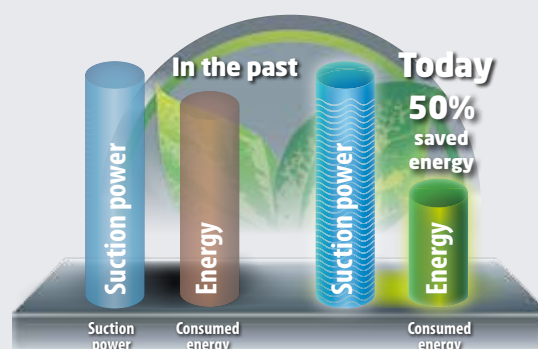





### FINE ASH FILTER

for household vacuum cleaners  
18 l



Art. No. 23.516.12

PU 1

EAN code



4 006825 548938

### DIRT BAG KIT

for TC-VC 1812 S  
12 l capacity  
Pack content 5 bags



Art. No. 23.511.59

PU 1

EAN code



4 006825 606065

### ASH FILTER

for wet and dry vacuum cleaners  
12 l



Art. No. 23.516.06

PU 1

EAN code



4 006825 578041

### DIRT BAG

20 l capacity  
Pack content 5 bags



Art. No. 23.511.52

PU 1

EAN code



4 006825 236040

### PLEATED FILTER

for TE-VC 1820



Art. No. 23.511.10

PU 1

EAN code



4 006825 231090

### DIRT BAG

25 l capacity  
Pack content 5 bags



Art. No. 23.511.50

PU 1

EAN code



4 006825 231281

### PLEATED FILTER

for TE-VC 1820, TE-VC 1925 SA,  
TE-VC 2230 SA, TH-VC 1815,  
TH-VC 1820 S, TH-VC 1820/1 S,  
TH-VC 1930 SA, TE-VC 2340 SA



Art. No. 23.511.13

PU 1

EAN code



4 006825 566512

### DIRT BAG

30 l capacity  
Pack content 5 bags



Art. No. 23.511.70

PU 1

EAN code



4 006825 528763

### PAPER FILTER SET

10 pieces



Art. No. 23.511.00

PU 1

EAN code



4 006825 231083

### DIRT BAG

40 l capacity  
Pack content 5 bags

NEW!



Art. No. 23.511.80

VE 1


EAN code



4 006825 607468

### FOAM FILTERS

for wet vacuuming  
Pack content 10 pieces



Art. No. 23.511.30

PU 1

EAN code



4 006825 236132

### EXTENSION HOSE

Ø 36 mm,  
with 4 connection adapters



Art. No. 23.620.00

PU 5

EAN code



4 006825 543018

### FABRIC FILTER

for universal use



Art. No. 23.511.40

PU 1

EAN code



4 006825 231151

### VACUUM CLEANER ACCESSORY SET

for TH-VC 1815, TH-VC 1820/1 S,  
TH-VC 1930 SA, TE-VC 1820,  
TE-VC 1925 SA, TE-VC 2230 SA,  
TE-VC 2340 SA | Ø 36 mm, 5 pieces



Art. No. 23.620.10

PU 1

EAN code



4 006825 604290

## HIGH PRESSURE CLEANER TC-HP 1334



|                           |                            |
|---------------------------|----------------------------|
| Mains voltage             | 220 V – 240 V ~ 50 Hz      |
| Rating                    | 1300 W S1                  |
| Max. Working pressure     | 100 bar                    |
| Delivery rate             | 340 l/h                    |
| Range                     | 3 m hose + 5 m power cable |
| Standard accessories      | Easy pack                  |
| Net weight   gross weight | 5.6 kg   6.4 kg            |
| Packing dimensions        | 250 x 210 x 470 mm         |
| Packaging unit            | 1                          |
| Article number            | 41.407.10                  |
| EAN code                  | 4 006825 602791            |

## HIGH PRESSURE CLEANER TC-HP 1538 PC



|                           |                            |
|---------------------------|----------------------------|
| Mains voltage             | 220 – 240 V ~ 50 Hz        |
| Rating                    | 1500 W S1                  |
| Max. Working pressure     | 110 bar                    |
| Delivery rate             | 380 l/h                    |
| Range                     | 5 m hose + 5 m power cable |
| Standard accessories      | Easy pack + Basic pack     |
| Net weight   gross weight | 8.3 kg   10.2 kg           |
| Packing dimensions        | 320 x 310 x 635 mm         |
| Packaging unit            | 1                          |
| Article number            | 41.407.20                  |
| EAN code                  | 4 006825 602807            |



The featherweight: portable and ideal for mobile use



Practical: lance holder, hose and cable winder



Handle and sturdy wheels ensure maximum mobility



Practical: lance holder, hose and cable winder



With Jet-Click separator – for easy attachment of the nozzles to the device



Practical, additional cable holder



With Jet-Click separator – for easy attachment of the nozzles to the device



Detachable hose ensures maximum flexibility





**incl. Easy Pack  
+ Basic Pack**



|                                  |  |
|----------------------------------|--|
| <b>Mains voltage</b>             | 220 – 240 V ~ 50 Hz  |
| <b>Rating</b>                    | 2000 W S1  |
| <b>Max. Working pressure</b>     | 150 bar  |
| <b>Delivery rate</b>             | 420 l/h  |
| <b>Range</b>                     | 6 m hose + 5 m power cable   |
| <b>Standard accessories</b>      | Easy pack + Basic pack   |
|                                  |  |
|                                  |  |
|                                  |  |
|                                  |  |
|                                  |  |
| <b>Net weight   gross weight</b> | 9.1 kg   11.0 kg   |
| <b>Packing dimensions</b>        | 320 x 310 x 655 mm   |
| <b>Packaging unit</b>            | 1  |
| <b>Article number</b>            | 41.407.30  |
| <b>EAN code</b>                  | <br>4 006825 602821 |



---

Practical: lance holder, hose and cable winder



### Detachable hose ensures maximum flexibility



# PRESSURE CLEANER **Accessories with system**

Einhell Germany AG

## Product range overview



**TC-HP 1334**

**Easy**



**TC-HP 1538 PC**

**Easy  
+ Basic**



**TC-HP 2042 PC**

**Easy  
+ Basic**

## Easy pack - included with all pressure cleaners



**Hose**




**Pivoted gun**



**Lance**



**Rotating nozzle**



**Spray container**

## Basic pack - included with selected pressure cleaners



**Spot/wide jet nozzle**



**Terrace cleaner**


## Extra accessories - also available



**HPH 6**  
Extension hose  
(6 m)

1


41.440.06



**HPWB 17**  
Washing brush  
(17 cm wide)

1

41.440.08



**HPRB 15**  
Rotating washing brush  
(Ø 15 cm)

1

41.440.09



**HPAN 90**  
Angle nozzle  
(90°)

1

41.440.07



**Model**

**Packaging unit**

**Article number**

**EAN code**



**Einhell compressors bring a lot of pressure to bear - and on prices as well.**



**Daniel Protschka**

(Techn. Product Manager,  
Einhell Germany AG)

As a product manager, I am of course extremely conscious of quality. I've now set up a workshop at home and got the Einhell compressor for it – perfect! With 8 bar and a tank volume of 24 l, it delivers enough power for all the work that comes up, but doesn't take up too much space. I'm now the greatest for my nieces as well, because no one can blow up balloons as fast as I can!



## OIL-FREE COMPRESSOR TH-AC 190 Kit



|                           |   |
|---------------------------|---|
| Mains voltage             | 220 – 240 V ~ 50 Hz   |
| Rating                    | 1100 W S3 15%   |
| Intake capacity           | 190 l/min   |
| Output                    | at 0 bar: 165 l/min<br>at 4 bar: 83 l/min<br>at 7 bar: 55 l/min |
| Speed                     | 15000 min <sup>-1</sup>   |
| Pump speed                | 3450 min <sup>-1</sup>  |
| Operating pressure        | max. 8 bar  |
| Number of cylinders       | 1   |
| Net weight   gross weight | 5.8 kg   6.4 kg   |
| Packing dimensions        | 385 x 150 x 400 mm  |
| Packaging unit            | 1   |
| Article number            | 40.205.36   |
| EAN code                  |   |

## OIL-FREE COMPRESSOR TH-AC 190/6 OF



|                           |   |
|---------------------------|---|
| Mains voltage             | 230 V ~ 50 Hz   |
| Rating                    | 1100 W S3 25%   |
| Intake capacity           | 185 l/min   |
| Output                    | at 0 bar: 139 l/min<br>at 4 bar: 77 l/min<br>at 7 bar: 60 l/min |
| Tank capacity             | 6 l   |
| Speed                     | 4000 min <sup>-1</sup>  |
| Pump speed                | 3550 min <sup>-1</sup>  |
| Operating pressure        | max. 8 bar  |
| Number of cylinders       | 1   |
| Net weight   gross weight | 9.2 kg   10.6 kg  |
| Packing dimensions        | 352 x 312 x 365 mm  |
| Packaging unit            | 1   |
| Article number            | 40.204.95   |
| EAN code                  |   |



Maintenance-free operation



Ergonomic design for easy transport



Maintenance-free motor



Mobile compressor with compressed air storage



Space saving storing



Light and compact construction



Ergonomic design for easy transport



Cable rewind



OIL-FREE COMPRESSOR  
**TH-AC 200/24 OF**



|                           |   |
|---------------------------|---|
| Mains voltage             | 230 V ~ 50 Hz   |
| Rating                    | 1100 W S1   |
| Intake capacity           | 140 l/min   |
| Output                    | at 0 bar: 110 l/min<br>at 4 bar: 70 l/min<br>at 7 bar: 45 l/min |
| Tank capacity             | 24 l  |
| Speed                     | 2850 min <sup>-1</sup>  |
| Pump speed                | 2850 min <sup>-1</sup>  |
| Operating pressure        | max. 8 bar  |
| Number of cylinders       | 1   |
| Net weight   gross weight | 19.5 kg   21.0 kg   |
| Packing dimensions        | 575 x 270 x 605 mm  |
| Packaging unit            | 1   |
| Article number            | 40.205.15   |
| EAN code                  |   |

COMPRESSOR  
**TC-AC 190/24/8**

**NEW!**



|                           |  |
|---------------------------|--|
| Mains voltage             | 230 V ~ 50 Hz  |
| Rating                    | 1500 W S2 15 min   |
| Intake capacity           | 15 l/min   |
| Output                    | at 0 bar: 98 l/min<br>at 4 bar: 76 l/min<br>at 7 bar: 60 l/min |
| Tank capacity             | 24 l   |
| Speed                     | 2850 min <sup>-1</sup>   |
| Pump speed                | 2850 min <sup>-1</sup>   |
| Operating pressure        | max. 8 bar   |
| Number of cylinders       | 1  |
| Net weight   gross weight | 25.2 kg   27.0 kg  |
| Packing dimensions        | 605 x 265 x 635 mm   |
| Packaging unit            | 1  |
| Article number            | 40.073.25  |
| EAN code                  |  |



Maintenance-free motor



Numerous applications up to 8 bar



Maintenance-free motor



Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw



Big wheels and holder for easy transport




User-friendly drain screw



# OIL-FREE COMPRESSOR

## TH-AC 200/40 OF



|                           |  |
|---------------------------|--|
| Mains voltage             | 230 V ~ 50 Hz  |
| Rating                    | 1100 W S1  |
| Intake capacity           | 140 l/min  |
| Output                    | at 0 bar: 110 l/min<br>at 4 bar: 70 l/min<br>at 7 bar: 45 l/min  |
| Tank capacity             | 40 l   |
| Speed                     | 2850 min <sup>-1</sup>   |
| Pump speed                | 2850 min <sup>-1</sup>   |
| Operating pressure        | max. 8 bar   |
| Number of cylinders       | 1  |
| Net weight   gross weight | 23.0 kg   25.0 kg  |
| Packing dimensions        | 680 x 320 x 655 mm   |
| Packaging unit            | 1  |
| Article number            | 40.205.16  |
| EAN code                  | <br>4 006825 595963 |



Maintenance-free motor



Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw




Note: For safe handling of the products please refer to the instructions in the operating manual.

## TC-AC 400/50/8

NEW!



CE

|                           |  |
|---------------------------|--|
| Mains voltage             | 230 V ~ 50 Hz  |
| Rating                    | 2200 W S3 50%  |
| Intake capacity           | 400 l/min  |
| Output                    | at 0 bar: 319 l/min<br>at 4 bar: 207 l/min<br>at 7 bar: 176 l/min  |
| Tank capacity             | 50 l   |
| Speed                     | 2850 min <sup>-1</sup>   |
| Pump speed                | 2850 min <sup>-1</sup>   |
| Operating pressure        | max. 8 bar   |
| Number of cylinders       | 2  |
| Net weight   gross weight | 40.0 kg   43.0 kg  |
| Packing dimensions        | 770 x 350 x 670 mm   |
| Packaging unit            | 1  |
| Article number            | 40.101.85  |
| EAN code                  | <br>4 006825 611632 |



Maintenance-free motor



Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw

COMPRESSOR  
TC-AC 400/50/8 KITItem identical with TC-AC 400/50/8,  
but incl. impact screwdriver, tire  
pressure gauge and spiral hose

Art. No. 40.102.52

PU 1

EAN code

NEW!



4 006825 612295

## OIL-FREE COMPRESSOR TH-AC 200/30 OF



|                           |   |
|---------------------------|---|
| Mains voltage             | 230 V ~ 50 Hz   |
| Rating                    | 1100 W S3 25%   |
| Intake capacity           | 200 l/min   |
| Output                    | at 0 bar: 165 l/min<br>at 4 bar: 83 l/min<br>at 7 bar: 60 l/min |
| Tank capacity             | 30 l  |
| Speed                     | 15000 min <sup>-1</sup>   |
| Pump speed                | 3550 min <sup>-1</sup>  |
| Operating pressure        | max. 8 bar  |
| Number of cylinders       | 1   |
| Net weight   gross weight | 18.1 kg   19.6 kg   |
| Packing dimensions        | 360 x 325 x 795 mm  |
| Packaging unit            | 1   |
| Article number            | 40.103.94   |
| EAN code                  |   |

## OIL-FREE COMPRESSOR TH-AC 240/50/10 OF

AIR +25%  
POWER 10 bar



|                           |  |
|---------------------------|--|
| Mains voltage             | 230 V ~ 50 Hz  |
| Rating                    | 1500 W S3 25%  |
| Intake capacity           | 240 l/min  |
| Output                    | at 0 bar: 173 l/min<br>at 4 bar: 107 l/min<br>at 7 bar: 76 l/min |
| Tank capacity             | 50 l   |
| Speed                     | 18000 min <sup>-1</sup>  |
| Pump speed                | 4000 min <sup>-1</sup>   |
| Operating pressure        | max. 10 bar  |
| Number of cylinders       | 1  |
| Net weight   gross weight | 22.3 kg   24.6 kg  |
| Packing dimensions        | 360 x 345 x 840 mm   |
| Packaging unit            | 1  |
| Article number            | 40.103.93  |
| EAN code                  |  |



Maintenance-free motor



Numerous applications up to 8 bar



Maintenance-free motor



Numerous applications up to 10 bar



Big wheels and holder for easy transport



Compact, space-saving design



Big wheels and holder for easy transport



Compact, space-saving design



## COMPRESSOR TE-AC 230/24



|                           |  |
|---------------------------|--|
| Mains voltage             | 230 V ~ 50 Hz  |
| Rating                    | 1500 W S1  |
| Intake capacity           | 230 l/min  |
| Output                    | at 0 bar: 132 l/min<br>at 4 bar: 102 l/min<br>at 7 bar: 83 l/min |
| Tank capacity             | 24 l   |
| Speed                     | 2850 min <sup>-1</sup>   |
| Pump speed                | 2850 min <sup>-1</sup>   |
| Operating pressure        | max. 8 bar   |
| Number of cylinders       | 1  |
| Net weight   gross weight | 22.9 kg   25.7 kg  |
| Packing dimensions        | 615 x 275 x 633 mm   |
| Packaging unit            | 1  |
| Article number            | 40.104.60  |
| EAN code                  |  |

## COMPRESSOR TE-AC 270/24/10



AIR +25%  
POWER 10 bar



|                           |   |
|---------------------------|---|
| Mains voltage             | 230 V ~ 50 Hz   |
| Rating                    | 1800 W S1   |
| Intake capacity           | 270 l/min   |
| Output                    | at 0 bar: 140 l/min<br>at 4 bar: 127 l/min<br>at 7 bar: 100 l/min |
| Tank capacity             | 24 l  |
| Speed                     | 2850 min <sup>-1</sup>  |
| Pump speed                | 2850 min <sup>-1</sup>  |
| Operating pressure        | max. 10 bar   |
| Number of cylinders       | 1   |
| Net weight   gross weight | 27.0 kg   29.5 kg   |
| Packing dimensions        | 600 x 280 x 620 mm  |
| Packaging unit            | 1   |
| Article number            | 40.104.50   |
| EAN code                  |   |



Oil lubrication contributes to long life



Numerous applications up to 8 bar




Oil lubrication contributes to long life



Numerous applications up to 10 bar



Big wheels and holder for easy transport



User-friendly drain screw



Big wheels and holder for easy transport



Large, easy-to-read pressure indicators

# COMPRESSOR TE-AC 270/50/10



|                           |   |
|---------------------------|---|
| Mains voltage             | 230 V ~ 50 Hz   |
| Rating                    | 1800 W S1   |
| Intake capacity           | 270 l/min   |
| Output                    | at 0 bar: 140 l/min<br>at 4 bar: 127 l/min<br>at 7 bar: 100 l/min |
| Tank capacity             | 50 l  |
| Speed                     | 2850 min <sup>-1</sup>  |
| Pump speed                | 2850 min <sup>-1</sup>  |
| Operating pressure        | max. 10 bar   |
| Number of cylinders       | 1   |
| Net weight   gross weight | 33.7 kg   36.8 kg   |
| Packing dimensions        | 770 x 330 x 720 mm  |
| Packaging unit            | 1   |
| Article number            | 40.104.40   |
| EAN code                  |   |



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Big wheels and holder for easy transport



Large, easy-to-read pressure indicators



Einhell Germany AG

**SUPER**  
**AIR** +25%  
**POWER** 10 bar

## THE COMPRESSOR SERIES WITH +25% MORE POWER.

10 bar tank pressure instead of the usual 8 bar makes the Einhell compressor series a force to be reckoned with for all those day-to-day jobs. Where standard compressors reach their limits, Einhell Super Air Power compressors only just begin to show what they are really made of. The benefits for you are an unimagined diversity of uses and compressed air accessories!


## WITH SUPER AIR POWER YOU WORK:

More efficiently

More quickly

With greater versatility

+25%  
more energy

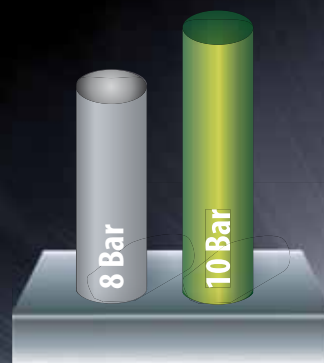






COMPRESSOR

## TE-AC 300/50/10



|                           |   |
|---------------------------|---|
| Mains voltage             | 230 V ~ 50 Hz   |
| Rating                    | 2000 W S3 50%   |
| Intake capacity           | 300 l/min   |
| Output                    | at 0 bar: 243 l/min<br>at 4 bar: 217 l/min<br>at 7 bar: 184 l/min                     |
| Tank capacity             | 50 l  |
| Speed                     | 2850 min <sup>-1</sup>  |
| Pump speed                | 1330 min <sup>-1</sup>  |
| Operating pressure        | max. 10 bar   |
| Number of cylinders       | 2   |
| Net weight   gross weight | 49.3 kg   54.8 kg   |
| Packing dimensions        | 850 x 365 x 750 mm  |
| Packaging unit            | 1   |
| Article number            | 40.101.81   |
| EAN code                  |  |



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Belt drive for low-noise operation and high efficiency



High air delivery rate thanks to a double compressor unit

Note: For safe handling of the products please refer to the instructions in the operating manual.



# COMPRESSOR TE-AC 480/100/10 D

THREE PHASE CURRENT



Oil-free performance  
"Good - very good"



|                           |   |
|---------------------------|---|
| Mains voltage             | 400 V 3~ 50 Hz three phase current                                |
| Rating                    | 3000 W S1   |
| Intake capacity           | 480 l / min   |
| Output                    | at 0 bar: 389 l/min<br>at 4 bar: 348 l/min<br>at 7 bar: 308 l/min |
| Tank capacity             | 100 l   |
| Speed                     | 2850 min <sup>-1</sup>  |
| Pump speed                | 1310 min <sup>-1</sup>  |
| Operating pressure        | max. 10 bar   |
| Number of cylinders       | 2   |
| Net weight   gross weight | 72.1 kg   81.1 kg   |
| Packing dimensions        | 1005 x 412 x 890 mm   |
| Packaging unit            | 1   |
| Article number            | 40.102.31   |
| EAN code                  |   |



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Belt drive for low-noise operation and high efficiency



Large air supply for many different applications



Einhell Germany AG

## MORE OPTIONS, MORE PERSPECTIVE!

The graphs on the compressor tanks indicate the many different uses of the relevant device.



### BLOW-OUT PISTOLS

For easy and fast cleaning of work areas. Short and long blow-out pistols.



### TIRE INFLATION METERS

For filling tires of all kinds. Tire inflation meter also available in professional version.



### SPRAY GUNS AND UNDERSEAL SPRAY GUNS

Flexible in use – including for underseal applications.



### PAINT SPRAY GUNS

The quick and easy solution for a wide variety of painting jobs.



### RATCHET AND HAMMER SCREWDRIVER

With the ratchet and hammer screwdriver you'll release and fasten practically any screw.



### ROD GRINDER

For carrying out grinding jobs of all types with ease.



### STAPLER & NAILER SET

With staples and nails of many different sizes.



### ECCENTRIC GRINDER/SANDER

For the effortless grinding/sanding of even large areas.



### CHISEL HAMMER SET

Together with the Super Air Power provided by Einhell compressors you can tackle even small demolition jobs.



### JET GUN & SUCTION-FEED SPRAY PISTOL

Enables applications like sandblasting.

## BLOW-OUT PISTOL

SHORT



Art. No. 41.331.00

PU 1

EAN code



## BLOW-OUT PISTOL

LONG



Art. No. 41.331.02

PU 1

EAN code



## TIRE PRESSURE GAUGE



Art. No. 41.370.00

PU 1

EAN code



## TIRE PRESSURE GAUGE

PROFI



Art. No. 41.331.10

PU 1

EAN code



## PAINT SPRAY GUN

CUP



Art. No. 41.330.00

PU 1

EAN code



## PAINT SPRAY GUN

PROFI, CUP



Art. No. 41.330.30

PU 1

EAN code



## PAINT SPRAY GUN

SUCTION-FEED CAN



Art. No. 41.329.00

PU 1

EAN code



## SPRAY GUN

SUCTION-FEED CAN



Art. No. 41.332.00

PU 1

EAN code



## COMPRESSED AIR KIT

3 pieces



Art. No. 41.327.41

PU 1

EAN code



## PROFI COMPRESSED AIR KIT

5 pieces



Art. No. 41.327.20

PU 1

EAN code



## JET GUN

SUCTION-FEED CAN



Art. No. 41.333.00

PU 1

EAN code



## SUCTION-FEED SPRAY PISTOL

DSP 226



Art. No. 41.334.00

PU 1

EAN code



## UNDERSEAL GUN



Art. No. 41.335.01

PU 1

EAN code



## IMPACT SCREWDRIVER SET

DSS 260/2



Art. No. 41.389.10

PU 1

EAN code



**RATCHET  
SCREWDRIVER KIT**

DRS 200/2



Art. No. 41.391.70

PU 1

EAN code



4 006825 504385

**CHISEL HAMMER  
KIT**

DMH 250/2



Art. No. 41.390.08

PU 1

EAN code



4 006825 504392

**PIN GRINDER KIT**

DSL 250/2



Art. No. 41.385.20

PU 1

EAN code



4 006825 504378

**COMPRESSED AIR  
ECCENTRIC SANDER**

DSE 125



Art. No. 41.333.25

PU 1

EAN code



4 006825 581607

**STAPLER/NAILER  
KIT**

DTA 25/2



Art. No. 41.377.55

PU 1


EAN code



4 006825 504415

**NAILS**

25 mm, 3000 pieces



Art. No. 41.378.71

PU 1


EAN code



4 006825 504460

**NAILS**

40 mm, 3000 pieces



Art. No. 41.378.72

PU 1


EAN code



4 006825 504866

**NAILS**

50 mm, 3000 pieces



Art. No. 41.378.73

PU 1


EAN code



4 006825 505795

**STAPLES**

5 x 13 mm, 3000 pieces



Art. No. 41.378.50

PU 1


EAN code



4 006825 504422

**STAPLES**

5 x 16 mm, 3000 pieces



Art. No. 41.378.55

PU 1


EAN code



4 006825 504439

**STAPLES**

5 x 25 mm, 3000 pieces



Art. No. 41.378.60

PU 1


EAN code



4 006825 504446

**STAPLES**

5 x 40 mm, 3000 pieces



Art. No. 41.378.61

PU 1

EAN code



4 006825 505788

**SPECIAL  
COMPRESSED AIR  
OIL**

500 ml



Art. No. 41.383.10

PU 1

EAN code



4 006825 411270

**MINI OILER**

R 1/4" internal thread  
R 1/4" external thread



Art. No. 41.350.02

PU 1

EAN code



4 006825 581614



### **FILTER + PRESSURE REDUCER**

incl. threaded nipple and  
quick-lock coupling R1/4"

Art. No. 41.342.00

PU 1

EAN code



### **FILTER + PRESSURE REDUCER**

incl. threaded nipple and  
quick-lock coupling R3/8"

Art. No. 41.341.00

PU 1

EAN code



### **COMBINATION CONDITIONING UNIT**

incl. threaded nipple and  
quick-lock coupling R1/4"

Art. No. 41.350.01

PU 1

EAN code



### **COMBINATION CONDITIONING UNIT**

incl. threaded nipple and  
quick-lock coupling R3/8"

Art. No. 41.350.00

PU 1

EAN code



### **SPIRAL HOSE**

4 m, Ø 6 mm

Art. No. 41.394.10

PU 1

EAN code



### **SPIRAL HOSE**

8 m, Ø 6 mm

Art. No. 41.394.20

PU 1

EAN code



### **FABRIC HOSE**

10 m, Ø 6 mm

Art. No. 41.381.00

PU 1

EAN code



### **FABRIC HOSE**

15 m, Ø 6 mm

Art. No. 41.382.00

PU 1

EAN code



### **FABRIC HOSE**

15 m, Ø 9 mm

Art. No. 41.382.10

PU 1

EAN code



### **AUTOMATIC HOSE ROLLER**

9 m + 1 m

Art. No. 41.380.00

PU 1

EAN code



### **QUICK-LOCK COUPLING**

R 1/4" external thread

Art. No. 41.392.07

PU 1

EAN code



### **QUICK-LOCK COUPLING**

R 3/8" external thread

Art. No. 41.392.08

PU 1

EAN code



### **QUICK-LOCK COUPLING**

R 1/2" external thread

Art. No. 41.392.09

PU 1

EAN code



### **QUICK-LOCK COUPLING**

R 1/4" internal thread

Art. No. 41.392.06

PU 1

EAN code



### QUICK-LOCK COUPLING

R 3/8" internal thread



Art. No. 41.392.05

PU 1

EAN code



4 006825 410327

### QUICK-LOCK COUPLING

R 1/2" internal thread



Art. No. 41.392.10

PU 1

EAN code



4 006825 599046

### QUICK-LOCK COUPLING

Ø 6 mm



Art. No. 41.393.01

PU 1

EAN code



4 006825 581638

### QUICK-LOCK COUPLING

Ø 9 mm



Art. No. 41.393.02

PU 1

EAN code



4 006825 581645

### HOSE CONNECTOR KIT

Ø 6 mm



Art. No. 41.395.00

PU 1

EAN code



4 006825 410136

### GROMMET

Ø 6 mm



Art. No. 41.396.60

PU 1

EAN code



4 006825 411690

### GROMMET

Ø 9 mm



Art. No. 41.396.61

PU 1

EAN code



4 006825 581621

### HOSE CONNECTION TUBE

Ø 6 mm



Art. No. 41.393.10

PU 1

EAN code



4 006825 411720

### HOSE CONNECTION TUBE

Ø 9 mm



Art. No. 41.393.20

PU 1

EAN code



4 006825 581652

### HOSE NOZZLE

Ø 6 mm

R 1/4" external thread



Art. No. 41.396.65

PU 1

EAN code



4 006825 581676

### HOSE NOZZLE

Ø 6 mm

R 3/8" external thread



Art. No. 41.396.66

PU 1

EAN code



4 006825 581669

### THREADED NIPPLE

R 1/4" external thread



Art. No. 41.396.55

PU 1

EAN code



4 006825 562347

### THREADED NIPPLE

R 3/8" external thread



Art. No. 41.396.50

PU 1

EAN code



4 006825 411683

### THREADED NIPPLE

R 1/4" internal thread



Art. No. 41.396.40

PU 1

EAN code



4 006825 411676

### THREADED NIPPLE

R 3/8" internal thread



Art. No. 41.396.45

PU 1

EAN code



### DOUBLE NIPPLE

R 1/4" external thread



Art. No. 41.396.20

PU 1

EAN code



### DOUBLE NIPPLE

R 3/8" external thread



Art. No. 41.396.10

PU 1

EAN code



### REDUCTION

R 3/8" external thread,  
R 1/4" external thread



Art. No. 41.396.30

PU 1

EAN code



### REDUCTION

R 1/2" external thread,  
R 3/8" internal thread



Art. No. 41.396.05


PU 1

EAN code



### REDUCTION

R 3/8" external thread,  
R 1/4" internal thread



Art. No. 41.396.00

PU 1

EAN code



### DISTRIBUTOR

2 quick-lock couplings,  
R 3/8" internal thread



Art. No. 41.396.80

PU 1

EAN code



### CLIP KIT

5 pieces, 8 – 12 mm



Art. No. 41.396.70

PU 1

EAN code



### INFLATION ADAPTER KIT

8 pieces



Art. No. 41.396.95

PU 1

EAN code



### MICHELIN-NIPPLE

NS 6 mm



Art. No. 41.393.30

PU 1

EAN code





 TILE / STONE CUTTING

**Machines that cut stones and prices down to size.**



Note: For safe handling of the products please refer to the instructions in the operating manual.



## TILE CUTTING MACHINE TC-TC 618



|                           |                          |
|---------------------------|--------------------------|
| Mains voltage             | 230 V ~ 50 Hz            |
| Rating                    | 600 W S2 10 min          |
| Speed                     | 3000 min <sup>-1</sup>   |
| Max. cutting thickness    | 35 mm (90°), 22 mm (45°) |
| Diamond cutting wheel     | Ø 180 x Ø 25.4 mm        |
| Protection class          | IP 54                    |
| Swiveling range           | 0° to 45°                |
| Workbench size            | 330 x 360 mm             |
| Net weight   gross weight | 9.4 kg   10.1 kg         |
| Packing dimensions        | 380 x 340 x 190 mm       |
| Packaging unit            | 1                        |
| Article number            | 43.011.80                |
| EAN code                  |                          |

## TILE CUTTING MACHINE RT-TC 430 U WITH BASE FRAME



|                           |                           |
|---------------------------|---------------------------|
| Mains voltage             | 230 V ~ 50 Hz             |
| Rating                    | 600 W S1                  |
| Speed                     | 3000 min <sup>-1</sup>    |
| Max. cutting thickness    | 25 mm (90°), 17 mm (45°)  |
| Max. cutting length       | 430 mm                    |
| Diamond cutting wheel     | Ø 180 x Ø 25.4 mm (turbo) |
| Protection class          | IP 54                     |
| Swiveling range           | 0° to 45°                 |
| Workbench size            | 500 x 385 mm              |
| Net weight   gross weight | 27.3 kg   29.8 kg         |
| Packing dimensions        | 775 x 485 x 335 mm        |
| Packaging unit            | 1                         |
| Article number            | 43.012.62                 |
| EAN code                  |                           |



Table adjustment (tilt)



Precise cuts thanks to parallel stop



Precisely adjustable stop




Pivot-mounted motor guide



Dust-free operation thanks to wet cutting



Cable rewind

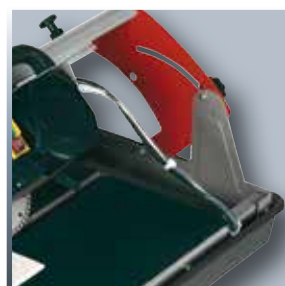

Water collection tank with coolant pump



Turbo diamond cutting wheel

## TILE CUTTING MACHINE RT-TC 520 U

WITH BASE FRAME



|                           |                           |
|---------------------------|---------------------------|
| Mains voltage             | 230 V ~ 50 Hz             |
| Rating                    | 800 W S1                  |
| Speed                     | 3000 min <sup>-1</sup>    |
| Max. cutting thickness    | 30 mm (90°), 25 mm (45°)  |
| Max. cutting length       | 520 mm                    |
| Diamond cutting wheel     | Ø 200 x Ø 25.4 mm (turbo) |
| Protection class          | IP 54                     |
| Swiveling range           | 0° to 45°                 |
| Workbench size            | 570 x 385 mm              |
| Net weight   gross weight | 28.7 kg   31.6 kg         |
| Packing dimensions        | 890 x 490 x 350 mm        |
| Packaging unit            | 1                         |
| Article number            | 43.012.71                 |
| EAN code                  |                           |

## TILE CUTTING MACHINE TE-TC 620 U

WITH RETRACTABLE BASE FRAME




|                           |                           |
|---------------------------|---------------------------|
| Mains voltage             | 230 V ~ 50 Hz             |
| Rating                    | 900 W S2 30 min           |
| Speed                     | 2950 min <sup>-1</sup>    |
| Max. cutting thickness    | 30 mm (90°), 25 mm (45°)  |
| Max. cutting length       | 620 mm                    |
| Diamond cutting wheel     | Ø 200 x Ø 25.4 mm (turbo) |
| Protection class          | IP 54                     |
| Swiveling range           | 0° to 45°                 |
| Workbench size            | 610 x 325 mm              |
| Net weight   gross weight | 35.8 kg   38.6 kg         |
| Packing dimensions        | 1013 x 455 x 460 mm       |
| Packaging unit            | 1                         |
| Article number            | 43.012.95                 |
| EAN code                  |                           |



Laser for precise cutting



Pivot-mounted motor guide

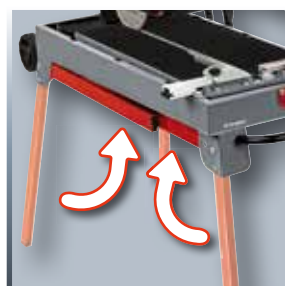

Folding feet



1 height-adjustable foot



Water collection tank with coolant pump



Removable laser



Easy transport



Pump guard cage





## STONE CUTTING MACHINE

# RT-SC 570 L

WITH BASE FRAME



|                           |                           |
|---------------------------|---------------------------|
| Mains voltage             | 230 V ~ 50 Hz             |
| Rating                    | 1500 W S2 20 min          |
| Speed                     | 3000 min <sup>-1</sup>    |
| Max. cutting thickness    | 60 mm (90°), 48 mm (45°)  |
| Max. cutting length       | 570 mm                    |
| Diamond cutting wheel     | Ø 250 x Ø 25.4 mm (turbo) |
| Protection class          | IP 54                     |
| Swiveling range           | 0° to 45°                 |
| Workbench size            | 630 x 450 mm              |
| Net weight   gross weight | 47.3 kg   51.0 kg         |
| Packing dimensions        | 1020 x 580 x 445 mm       |
| Packaging unit            | 1                         |
| Article number            | 43.014.44                 |
| EAN code                  | 4 006825 541243           |



Plunge cutting function



Feet can be mounted without tools



Angle stop



Removable laser

# STONE CUTTING MACHINE

## RT-SC 920 L

WITH BASE FRAME



|                           |                           |
|---------------------------|---------------------------|
| Mains voltage             | 230 V ~ 50 Hz             |
| Rating                    | 2200 W S2 20 min          |
| Speed                     | 3000 min <sup>-1</sup>    |
| Max. cutting thickness    | 70 mm (90°), 55 mm (45°)  |
| Max. cutting length       | 920 mm                    |
| Diamond cutting wheel     | Ø 300 x Ø 25.4 mm (turbo) |
| Protection class          | IP 54                     |
| Swiveling range           | 0° to 45°                 |
| Workbench size            | 920 x 550 mm              |
| Net weight   gross weight | 65.1 kg   71.6 kg         |
| Packing dimensions        | 1450 x 705 x 490 mm       |
| Packaging unit            | 1                         |
| Article number            | 43.014.32                 |
| EAN code                  | 4 006825 541199           |



Plunge cutting function



Feet can be mounted without tools



Angle stop



Removable laser



Einhell Germany AG

### DIAMOND CUTTING WHEEL

for TH-TC 618, RT-TC 430 U,  
TC-TC 618  
Ø 180 x Ø 25.4 mm

Art. No. 43.011.70

PU 1

EAN code



4 006825 432015

### TURBO DIAMOND CUTTING WHEEL

for RT-TC 430 U, TH-TC 618,  
TC-TC 618  
Ø 180 x Ø 25.4 mm

Art. No. 43.011.76

PU 1

EAN code



4 006825 505481

### TURBO DIAMOND CUTTING WHEEL

for RT-TC 520 U, TE-TC 620 U  
Ø 200 x Ø 25.4 mm

Art. No. 43.011.75

PU 1

EAN code



4 006825 434361

### TURBO DIAMOND CUTTING WHEEL

for RT-SC 570 L  
Ø 250 x Ø 25.4 mm

Art. No. 43.011.77

PU 1

EAN code



4 006825 506723

### TURBO DIAMOND CUTTING WHEEL

for RT-SC 920 L  
Ø 300 x Ø 25.4 mm

Art. No. 43.011.78

PU 1

EAN code



4 006825 541649



**Brand quality at the best price -  
that makes you want to keep on working.**



**Christoph Gaßner**  
(Marketing Management,  
Einhell Germany AG)

Wherever my angle grinder meets its limits, the Einhell cutting machine is the ideal device. It goes through even large profiles like a knife through butter. Swiveling machine vise with rapid adjustment, suitable for dry cutting, and so much more. It didn't take long to build the base for my new smoker. And my friends' eyes when they saw the grill were bigger than the T-bone steaks.







# BENCH GRINDER

## TH-XG 75 Kit



|                                  |   |
|----------------------------------|---|
| <b>Mains voltage</b>             | <b>230 V ~ 50 Hz</b>  |
| <b>Rating</b>                    | <b>120 W</b>  |
| <b>Speed</b>                     | <b>0 – 9900 min<sup>-1</sup></b>  |
| <b>Grinding wheel</b>            | <b>Ø 75 x Ø 10 x 20 mm</b>  |
| <b>Net weight   gross weight</b> | <b>3.1 kg   3.5 kg</b>  |
| <b>Packing dimensions</b>        | <b>278 x 218 x 190 mm</b>   |
| <b>Packaging unit</b>            | <b>4</b>  |
| <b>Article number</b>            | <b>44.125.60</b>  |
| <b>EAN code</b>                  |  |



|                                  |   |
|----------------------------------|---|
| <b>Mains voltage</b>             | 230 V ~ 50 Hz   |
| <b>Rating</b>                    | 150 W S2 30 min   |
| <b>Speed</b>                     | 2950 min <sup>-1</sup>  |
| <b>Grinding wheel</b>            | Ø 150 x Ø 12.7 x 16 mm  |
|                                  |   |
|                                  |   |
|                                  |   |
|                                  |   |
|                                  |   |
|                                  |   |
|                                  |   |
|                                  |   |
|                                  |   |
| <b>Net weight   gross weight</b> | 5.3 kg   5.7 kg   |
| <b>Packing dimensions</b>        | 295 x 205 x 205 mm  |
| <b>Packaging unit</b>            | 1   |
| <b>Article number</b>            | 44.125.70   |
| <b>EAN code</b>                  |  |



### Adjustment of the rotational speed to suit the application




### Wider range of options thanks to flexible shaft



Rubber feet ensure safe, low-vibration stability



Adjustable spark guard window

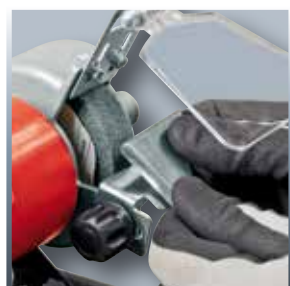


Fine polishing wheel



Large grinding wheel



Long service life thanks to robust compact metal construction



Includes coarse and fine grinding/sanding wheel (K36/K60)




## BENCH GRINDER TC-BG 175



CE

|                |                        |
|----------------|------------------------|
| Mains voltage  | 230 V ~ 50 Hz          |
| Rating         | 400 W S2 30 min        |
| Speed          | 2950 min <sup>-1</sup> |
| Grinding wheel | Ø 175 x Ø 32 x 25 mm   |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 11.1 kg   11.7 kg  |
| Packing dimensions        | 420 x 255 x 252 mm |
| Packaging unit            | 1                  |
| Article number            | 44.126.30          |
| EAN code                  |                    |

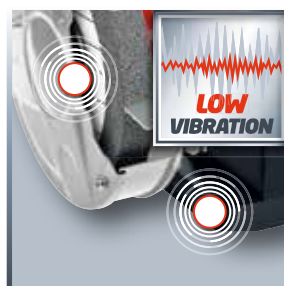


Rubber feet ensure safe, low-vibration stability



Adjustable spark guard window



Long service life thanks to robust compact metal construction

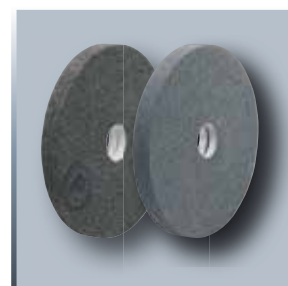

Includes coarse and fine grinding/sanding wheel (K36/K60)

Note: For safe handling of the products please refer to the instructions in the operating manual.

## BENCH GRINDER TC-BG 200



|                |                        |
|----------------|------------------------|
| Mains voltage  | 230 V ~ 50 Hz          |
| Rating         | 400 W S2 30 min        |
| Speed          | 2950 min <sup>-1</sup> |
| Grinding wheel | Ø 200 x Ø 32 x 25 mm   |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 12.9 kg   13.3 kg  |
| Packing dimensions        | 430 x 270 x 290 mm |
| Packaging unit            | 1                  |
| Article number            | 44.128.20          |
| EAN code                  |                    |



## WET-DRY GRINDER TC-WD 150/200



|                |   |
|----------------|---|
| Mains voltage  | 230 V ~ 50 Hz   |
| Rating         | 250 W S2 30 min   |
| Speed          | Dry: 2950 min <sup>-1</sup><br>Wet: 134 min <sup>-1</sup> |
| Grinding wheel | Dry: Ø 150 x Ø 12.7 x 20 mm,<br>Wet: Ø 200 x Ø 20 x 40 mm |

|                           |                    |
|---------------------------|--------------------|
| Net weight   gross weight | 9.9 kg   11.2 kg   |
| Packing dimensions        | 530 x 320 x 300 mm |
| Packaging unit            | 1                  |
| Article number            | 44.172.40          |
| EAN code                  |                    |



Rubber feet ensure safe, low-vibration stability



Adjustable spark guard window




Rubber feet ensure safe, low-vibration stability



Robust and compact metal structure for a long service life



Long service life thanks to robust compact metal construction



Includes coarse and fine grinding/sanding wheel (K36/K60)



Corrosion-resistant water tank



Includes coarse and fine grinding/sanding wheel (K36/K60)



## STATIONARY BELT GRINDER

## TH-US 240



|                                  |                        |
|----------------------------------|------------------------|
| Mains voltage                    | 230 V ~ 50 Hz          |
| Rating                           | 240 W S2 30 min        |
| Speed                            | 2950 min <sup>-1</sup> |
| Grinding wheel dimensions        | Ø 150 x Ø 12.7 x 20 mm |
| Grinding/sanding belt dimensions | 50 x 686 mm            |
| Belt speed                       | 900 m/min.             |
| Net weight   gross weight        | 7.3 kg   8.2 kg        |
| Packing dimensions               | 410 x 340 x 215 mm     |
| Packaging unit                   | 1                      |
| Article number                   | 44.661.50              |
| EAN code                         |                        |

## METAL CUTTING SAW

## TH-MC 355




|                           |                                      |
|---------------------------|--------------------------------------|
| Mains voltage             | 230 V ~ 50 Hz                        |
| Rating                    | 2000 W                               |
| Cutting disc              | Ø 355 x Ø 25.4 x 3.2 mm              |
| Speed                     | 3000 min <sup>-1</sup>               |
| Mitre cut                 | -30° to +45°                         |
| Saw width max. (90°)      | quadrate 170 x 70 mm<br>round 100 mm |
| Clamping range            | 230 mm                               |
| Table size                | 460 x 260 mm                         |
| Net weight   gross weight | 19.0   19.6 kg                       |
| Packing dimensions        | 600 x 340 x 420 mm                   |
| Packaging unit            | 1                                    |
| Article number            | 45.031.40                            |
| EAN code                  |                                      |



2 tool supports ensure maximum variability



Adjustable spark guard window for safety when working

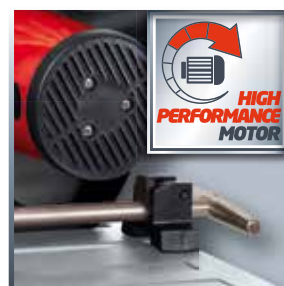

High-torque motor




Safe and user-friendly fastening with quick-adjust facility



Rubber feet for safe, low-vibration stability



Sturdy, compact design in metal



Precise mitre cuts



For mobile use

**FINE GRINDING/  
SANDING WHEEL  
(60)**

for TH-US 240, TC-WD 150/200  
Ø 150 x Ø 12.7 x 20 mm

Art. No. 44.125.12

PU 1

EAN code



4 006825 440966

**FINE GRINDING/  
SANDING WHEEL  
(60)**

for TC-BG 150  
Ø 150 x Ø 12.7 x 16 mm

Art. No. 44.125.14

PU 1

EAN code



4 006825 505382

**FINE GRINDING/  
SANDING WHEEL  
(60)**

for TC-BG 175  
Ø 175 x Ø 32 x 25 mm

Art. No. 44.126.10

PU 1

EAN code



4 006825 440416

**FINE GRINDING/  
SANDING WHEEL  
(60)**

for TC-BG 200  
Ø 200 x Ø 32 x 25 mm

Art. No. 44.128.10

PU 1

EAN code



4 006825 440447

**WET DISC FINE (80)**

for TC-WD 150/200  
Ø 200 x Ø 20 x 40 mm

Art. No. 44.173.00

PU 1

EAN code



4 006825 440454

**COARSE GRINDING/  
SANDING WHEEL  
(36)**

for TH-US 240, TC-WD 150/200  
Ø 150 x Ø 12.7 x 20 mm

Art. No. 44.125.13

PU 1

EAN code



4 006825 440959

**COARSE GRINDING/  
SANDING WHEEL  
(36)**

for TC-BG 150  
Ø 150 x Ø 12.7 x 16 mm

Art. No. 44.125.15

PU 1

EAN code



4 006825 505399

**COARSE GRINDING/  
SANDING WHEEL  
(36)**

for TC-BG 175  
Ø 175 x Ø 32 x 25 mm

Art. No. 44.126.11

PU 1

EAN code



4 006825 440423

**COARSE GRINDING/  
SANDING WHEEL  
(36)**

for TC-BG 200  
Ø 200 x Ø 32 x 25 mm

Art. No. 44.128.11

PU 1

EAN code



4 006825 440430


**GRINDING/  
SANDING BELT SET**

for TH-US 240  
50 x 686 mm, 5 pieces

Art. No. 44.198.09

PU 1

EAN code



4 006825 565010

Further accessories from



[www.kwb.eu](http://www.kwb.eu)

# Get ahead with Einhell point-of-sale solutions.

## Shop-in-shop systems

---



- Shop-in-shop - 360 x 240 cm  
(on request)



- Shop-in-shop - 240 x 130 cm  
(on request)

## Print products

---



- Flyers/folders



- Brochures



## Permanent secondary displays



■ **Wall display -**  
**Euro pallet 120 x 80 cm**  
(Article no. 720070)



■ **Wall display -**  
**Euro pallet 80 x 50 cm**  
(Article no. 720075)



■ **Island display -**  
**Euro pallet 120 x 80 cm**  
(Article no. 720080)



■ **Island display 2 -**  
**Euro pallet 120 x 80 cm**  
(on request)



■ **Modular display -**  
**"BOAH HAMMA" -**  
**Half-pallet 80 x 60 cm**  
(Article no. 720090)



■ **Modular display -**  
**"Power X-Change" -**  
**Half-pallet 80 x 60 cm**  
(Article no. 720085)



■ **Modular display -**  
**"BOAH HAMMA" -**  
**Quarter-pallet 60 x 40 cm**  
(Article no. 720095)



**Einhell Germany AG**

**We're always here to help – and that's a promise!**  
Is there anything you'd like to ask us about our products?  
Would you like to order a part?  
Your product isn't working as it should?

**We're at your service!**  
We'll get you some help – fast and without any fuss.



**iSC GmbH, Eschenstr. 6,  
94405 Landau/Isar, Germany**



**+49 (0) 9951 959 2000**



(Landline charge 14 cent/min.)  
(Cell phone charge 42 cent/min.)

**+49 (0) 1805 835 830**



**www isc-gmbh.info**



**info@isc-gmbh.info**

Einhell Germany AG  
Wiesenweg 22  
94405 Landau/Isar  
Germany

Subject to technical  
modifications and errors

www.einhell.com  
info@einhell.com  
© 2015 Einhell Germany AG

Item no. 110170  
As of: 11.2015

**Einhell**

