




# Laserliner®

## CombiCross-Laser 5 DLD



Green cross-line laser with ultra bright diode technology, and an additional 3 red laser lines and plumb laser

Rev.0316

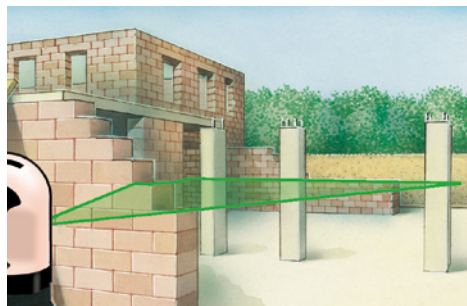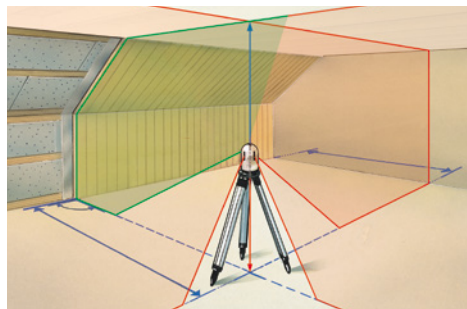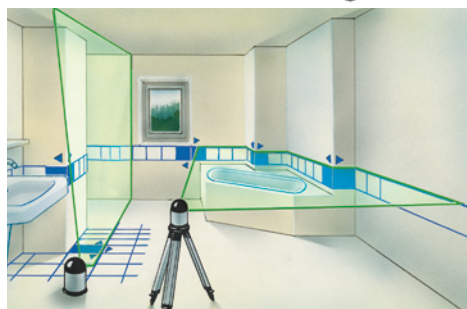

Stable metal base with vernier adjustment


Lithium battery pack

- **Green laser technology**
- Extremely bright green laser cross at front in the **DLD design achieves high-quality lines** as well as a clean and clear and therefore easily visible line image.
- **PowerBright-Laser:** Special high-performance laser diodes project extremely visible laser lines.
- The **4 vertical lines** are aligned at right angles to one another.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Connectible** laser lines.
- **RX-/GRX-Ready:** Together with an optional laser receiver, the integrated hand-held receiver modes permit detection of the red laser lines (RX-Ready) and green laser lines (GRX-Ready) over long distances and under unfavourable light conditions.
- The pivoted housing can be turned with a **vernier adjustment mechanism** to permit exact positioning of laser lines.
- **Vial** and **height-adjustable feet** for preliminary adjustment of the unit.
- Long-lasting, powerful **rechargeable lithium-ion battery**.
- **Transport lock:** A pendulum lock protects unit during transport.

### TECHNICAL DATA

<b>ACCURACY</b>	2 mm per 10 m
<b>SELF-LEVELLING RANGE</b>	± 2°
<b>LEVELLING</b>	automatic
<b>LASER WAVELENGTH</b>	line lasers red 635 nm line lasers green 510 nm plumb laser red 650 nm
<b>LASERCLASS</b>	2 / < 1 mW
<b>POWER SUPPLY</b>	rechargeable lithium-ion battery, approx. 4 hrs operating time
<b>WORKING TEMPERATURE</b>	0°C ... +50°C
<b>STORAGE TEMPERATURE</b>	-10°C ... +60°C
<b>WEIGHT</b>	1.1 kg
<b>DIMENSIONS (W x H x D)</b>	130 x 205 x 140 mm

### 1H 4V 1D

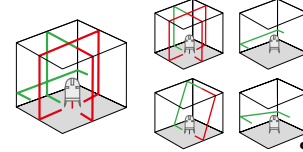

**CombiCross-Laser 5 DLD**  
including Sortimo® L-BOXX® 136  
+ tripod adapter  
+ power supply/battery charger  
+ rubber caps  
+ rechargeable lithium-ion battery

**Packing dimension (W x H x D)**  
442 x 151 x 357 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
CombiCross-Laser 5 DLD	057.200L	4 021563 688494	1

